

DIRECT BURIAL AUDIO CABLE

12 AWG 2 CONDUCTOR

CMX (UV) RATED



DESCRIPTION

12 AWG 2 Conductor Direct Burial, CMX (UV) Stranded Bare Copper, Unshielded with an overall jacket. 500 ft, Spool, Black.

FEATURES

- Suitable for Direct Burial
- Durable Weather Resistant Jacket
- High-Strand Oxygen Free
- Bare Copper Conductors
- ETL Listed, RoHS-compliant
- 500 ft Spool
- UV Rated Outer Jacket



209-2324/DB

CONSTRUCTION

Conductor count:	2
Shape:	Round
Rip cord:	Yes
Water Block Type:	Yes

CONDUCTORS

Material:	Stranded bare copper
Trade size:	12 AWG
Stranding:	65/0.25 mm
Insulation material:	Polyvinyl Chloride (PVC)
Insulation O.D.:	0.13 in. (3.30 mm)
Insulation color:	Red, Black

JACKET

Material:	Polyethylene (PE)
Thickness:	0.02 in. (0.55 mm)
O.D.:	0.36 in. (9.20 mm)
Marking:	VERTICAL 5024318 c(ETL)us AUDIO CABLE 12AWG 2 COND 65 STRANDED OXYGEN FREE OUTDOOR UV DIRECT BURIAL RoHS V2094P14715 XXXFT 273706P0115106

MECHANICAL


Temperature rating:	75° C
Aging Condition (°Cxhrs):	100x168
Tensile Strength (Mpa)	
Before:	≥13.8
After:	≥85% of unaged
Aging Elongation (%):	
Before:	≥100
After:	≥50% of unaged
Cold Bend (-20±2° Cx4hrs):	No Crack

SAFETY

NFPA 70 (NEC®) rating:	CMX (UV)
Voltage rating:	300 V RMS

PACKED WEIGHT

209-2324/DB:	35 lb
--------------	-------

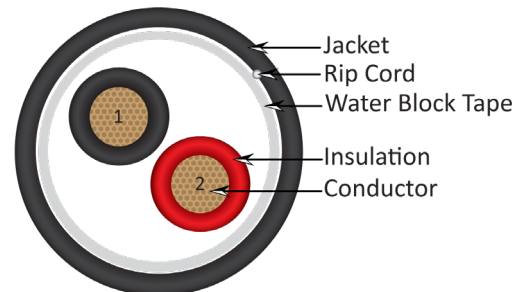

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York
713.322.7242 Texas



verticalcable.com

Rev. 04/2026

Subject to change without notice.