



VERTICAL CABLE

# OPTICAL FIBER MECHANICAL SPLICE UNIVERSAL | 6-PACK

## 265-MEC01-E

### DESCRIPTION

Optical Fiber Mechanical Splice, Universal, 0.25 and 0.9 mm, 6-Pack

### FEATURES

- Single Fiber Capacity
- Installation Time of under 30 seconds
- ANSI/TIA-568.3-D compliant

### CHARACTERISTICS

Compatible Splicing:	Mechanical Splice
Fiber Coating Size:	250 μm–900 μm
Insertion Loss:	Maximum: 0.3 dB; Typical: 0.1 dB
Return Loss:	≥45 dB
Tensile Strength:	≤4 N (0.9 lbf)

### ENVIRONMENTAL



Storage Temperature:	-45 °C–+85 °C (-49 °F–+185 °F)
Operating Temperature:	-20 °C–+70 °C (-4 °F–+158 °F)
Operating Humidity:	≤95 % RH non-condensing

### DIMENSIONS


Height:	0.3 in. (7.62 mm)
Width:	0.2 in. (5.08 mm)
Depth:	1.5 in. (38.1 mm)

### VERTICAL CABLE ACCESSORY

Optical Fiber Mechanical Splice Holder Up to 12-Fiber (265-HLD13-2B4-0)

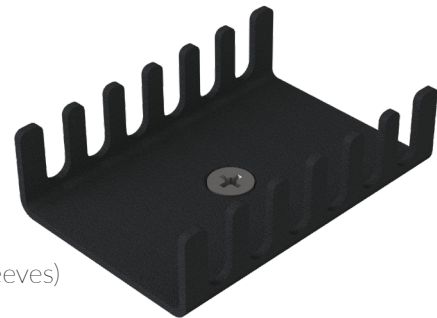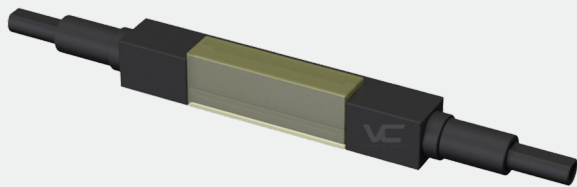

As delivered (No Sleeves)

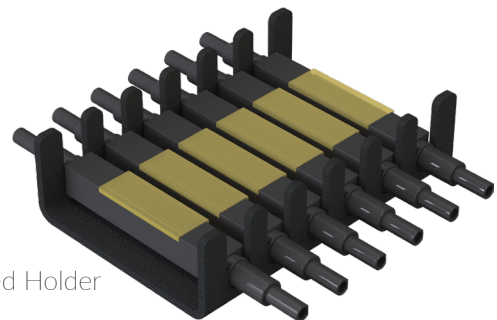

Example of Loaded Holder with Sleeves

Florida (HQ)  
800-749-2447

California  
951-696-7772

New York  
845-391-8318

Texas  
713-322-7242

verticalcable.com

This specification sheet is subject to change without notice.

VC fiber

Rev. 04/2026