



VERTICAL CABLE

BLANK PATCH PANEL

UNSHIELDED | 1 RMU | 48-POSITION


266-PKM02-D8000

DESCRIPTION

Blank Rack-Mount Panel, Unshielded, 1-RMU, 48-position

FEATURES

- Standard Compatibility
- Durable Construction
- Black Powder Coating Finishing
- High Capacity Housing up to:
 - ☐ 48 keystone modules
 - ☐ 48 optical fibers using SC SX adapters
 - ☐ 96 optical fibers using LC DX adapters
- Efficient and Easy to Access Rear, Removable & Interchangeable Cable Management *(sold separately)*
- Weight: 1.3 lb (0.6 kg) *without keystone modules*

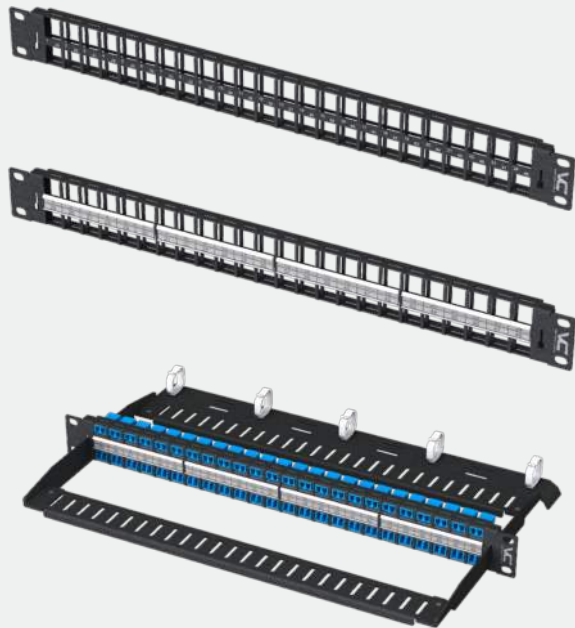

CHARACTERISTICS

Form-Factor: 19 in. rack/cabinet mounting standard (EIA-ECA-310-E)

Adapter Orientation: Key/Latch Up

MATERIALS

Panel: 0.06 in. (1.5 mm) (16-GA) CRS

Black Powder Coating: RAL 9005 (jet black)

LABELING

Holder: Integral to Keystone-Module Block, clear window

Medium: Plain-Paper Inserts, factory-preprinted position numbers

RACK MOUNTING

Set of USCU fasteners: 4 x #10-32 x 5/8 cross-recessed pan-head machine screws, black;

4 x #12-24 x 5/8 cross-recessed pan-head machine screws, black;

4 x #12 x 9/16 x 3/8 plain round washers, nylon, black

ENVIRONMENTAL

Operating Temperature: -20 °C--+70 °C (-4 °F--+158 °F)

Operating Humidity: ≤ 95% RH non-condensing

DIMENSIONS

Height:	1.75 in. (44.5 mm) [1 RMU]
Width:	19 in. (485 mm)
Depth:	0.6 in. (15 mm)

COMPATIBLE VERTICAL CABLE PRODUCTS

- 266-CFM00-2A3 | Cable Management Bar, General Purpose, 3 in. deep
- 266-CFM00-2B3 | Cable Management Bar, Optical Fiber, 3 in. deep
- 266-CFM00-2A4 | Cable Management Bar, General Purpose, 4 in. deep
- 266-CFM00-2B4 | Cable Management Bar, Optical Fiber, 4 in. deep

Compatible with all Vertical Cable keystone inserts (Optical Fiber & Twisted-Pair Systems)



Florida (HQ)
800-749-2447

California
951-696-7772

New York
845-391-8318

Texas
713-322-7242

verticalcable.com

This specification sheet is subject to change without notice.



RoHS



Intertek

Rev. 03/2026