



VERTICAL CABLE

SECURITY CABLE

**22 AWG 4 CONDUCTOR STRANDED
UNSHIELDED, NON-PLENUM**

210-224ST/5WH

DESCRIPTION

**22/4 Security Cable, Non-Plenum,
Stranded Bare Copper, Unshielded**

FEATURES

- Stranded bare copper conductors provide additional flexibility
- PVC insulation and jacket
- Sequential length markings on jacket
- ETL-Listed, RoHS compliant
- 500 ft pull box
- Weight: 9 lbs

CONDUCTORS

Material: Stranded Bare Copper
 Size: 22 AWG
 Count: 4 Conductors
 Diameter: 0.3/0.009 in. (7/0.24 mm)
 Rip Cord: Yes

INSULATION



Diameter: Polyvinyl Chloride (PVC)
 0.04 in. (1.10 mm)
 Colors: Red, Black, White, Green

JACKET

Thickness: Polyvinyl Chloride (PVC)
 0.02 in. (0.45 mm)
 Outer Diameter (OD): 0.14 in. (3.60 mm)
 Rip Cord: Yes
 Jacket Marking: VERTICAL 5024318 c(ETL)us CM/CL2
 22AWG 4C STRANDED 75C SUN RES RoHS
 V2094P14717 274306P0112202 XXXXFT

ELECTRICAL PROPERTIES

Voltage Rating: 300 V RMS
 Temperature Rating: 75 °C
 Fire Rating: CM/CL2 Rated

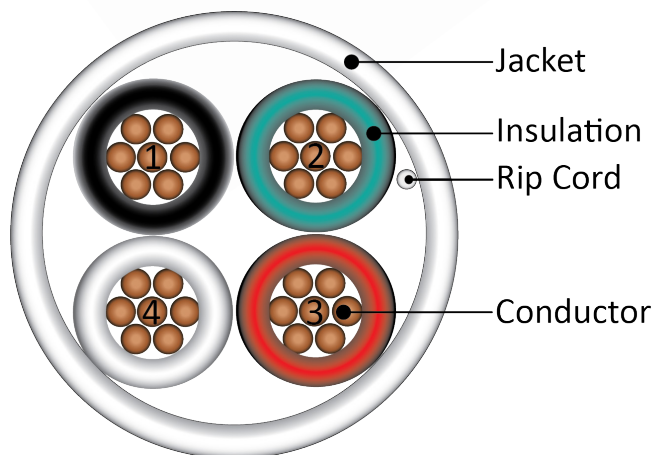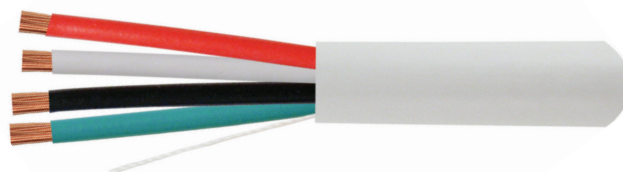

Florida (HQ)
800-749-2447

California
951-696-7772

New York
845-391-8318

Texas
713-322-7242

verticalcable.com

This specification sheet is subject to change without notice.



RoHS



Intertek

Rev. 04/2026