



**VERTICAL CABLE**

# ALARM-SECURITY CABLE

## 22 AWG, 2 CONDUCTORS

## UNSHIELDED

# 210-222SO/WH

### DESCRIPTION

**Alarm/Security Cable, 22 AWG  
2 Conductor, Solid Bare Copper,  
Unshielded, 1,000 ft. pull box**

### FEATURES

- PVC insulation and jacket
- 22 AWG Bare Copper Conductors
- Sequential length markings on jacket
- ETL-Listed, RoHS Compliant
- Packaging: 1,000 ft pull box
- Weight: 9 lbs

### APPLICATIONS

- Intercom systems
- Security systems
- Sound and audio
- Power limited control circuits
- Indoor applications
- Door controllers
- Key pads
- Smoke detectors



### CONSTRUCTION

#### CONDUCTORS

Size: Solid Bare Copper  
22 AWG  
Conductors: 2

Diameter: 0.02 in. (0.61 mm)

#### INSULATION

Diameter: Polyvinyl Chloride (PVC)  
0.04 in. (1 ± 0.1 mm)  
Nom. Thickness: 0.008 in. (0.2 mm)  
Colors: Red, Black

#### JACKET


Diameter: PVC  
0.1 in (2.9 ± 0.1 mm)  
Nom. Thickness: 0.017 in. (0.43 mm)  
Rip cord: Yes  
Marking: VERTICAL 50 24318 c(ETL)us  
CM/CL2 22AWG 2C SOLID 75C SUN  
RES RoHS 66907M0906103 XXXXFT

#### MECHANICAL

Temperature Rating: -20 °C to 75 °C

#### SAFETY

NFPA 70 (NEC®) Rating: CM/CL2  
Rated Voltage: 150 V RMS (not for power purposes)

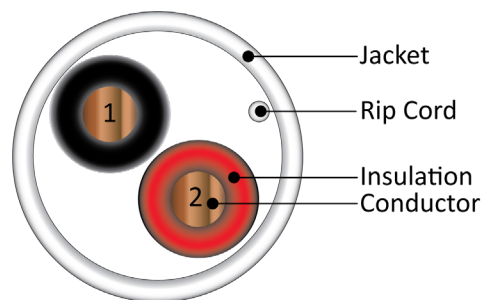

Florida (HQ)  
800-749-2447

California  
951-696-7772

New York  
845-391-8318

Texas  
713-322-7242

[verticalcable.com](http://verticalcable.com)

This specification sheet is subject to change without notice.



RoHS



Intertek

Rev. 06/2026