



VERTICAL CABLE

ALARM-SECURITY CABLE

12/4 STRANDED | PLENUM RATED

211-124/P/5WH

DESCRIPTION

12 AWG 4 Conductor Stranded Bare Copper, CMP/CL3P, Unshielded, 500 ft. Spool, White

FEATURES

- PVC Plenum rated jacket
- Unshielded 12 AWG / 4 Conductors with stranded bare copper (19 Strand)
- Ideal for Intercom systems, security, sound and audio, power limited control circuits and indoor applications
- ETL-Listed, RoHS compliant
- White jacket color
- 500 ft wooden spool
- Weight: 56.5 lbs



CONDUCTORS

Material: Stranded Bare Copper
 Trade size: 12 AWG
 Count: 4 Conductors
 Diameter: 19×0.0185 in. (19×0.47 ± 0.01 mm)

INSULATION

Diameter: 0.114 in. (2.9 ± 0.1 mm)
 Nominal Thickness: 0.0098 in. (0.25 mm)
 Colors: Red, Black, White, Green

JACKET



Nominal Thickness: 0.015 in. (0.38 mm)
 Outer Diameter (OD): 0.31 in. (7.8 ± 0.5 mm)
 Rip Cord: Yes
 Jacket Marking: 12AWG 4C STRANDED c(ETL)us
 CMP 5024318 RoHS/FT6/CL3P
 V2094P400447 XXXXFT

ELECTRICAL PROPERTIES

Voltage Rating: 300 V RMS (not for power purposes)
 Nominal Conductor DCR: ≤5.41 Ohm/km

MECHANICAL PROPERTIES

Operating Temperature Range: -20 °C to 75 °
 Installation Temperature Range: 0 °C to 50 °C
 Fire Rating: CMP/CL3P Rated

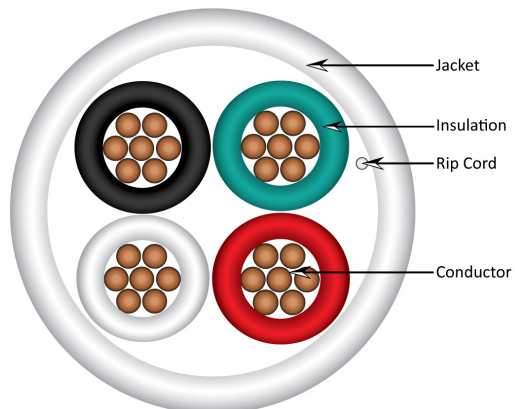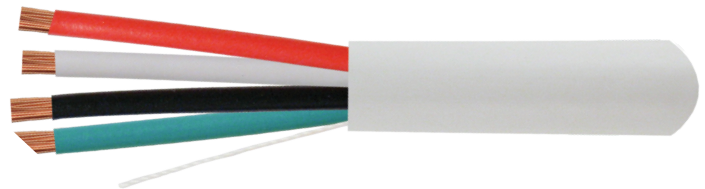

Florida (HQ)
800-749-2447

California
951-696-7772

New York
845-391-8318

Texas
713-322-7242

verticalcable.com

This specification sheet is subject to change without notice.



RoHS



Intertek

Rev. 06/2026