

PRODUCT CATALOG



VERTICAL CABLE
Simply Connect.



1989

Chiptech, Inc., the parent company of Vertical Cable was founded.



2006

VC was established, growing into a nationwide distributor of low voltage cable and connectivity with two distribution centers in Florida and California.



2013

VC opened its New York distribution center while simultaneously launching its sister company, Trans Cable International, a U.S.-based manufacturing facility in Bonham, Texas.



2024

Newest VC distribution center in Houston, TX.



2026

VC continues to deliver reliable, high-performance solutions—supporting the systems behind modern installations.



Family-Owned. Built on Values.



Vertical Cable is a family-owned and operated company with leadership spanning generations. That foundation drives our focus on trust, accountability, and long-term partnerships—because strong relationships are at the core of everything we build.

**MIKE
SATTARZADEH**
CEO

"Slow and steady wins the race."

Guiding the company's long-term vision, product innovation, and strategic growth—while staying grounded in the values that built the business.



**MAHSA
SATTARZADEH**
COO

"It is not if, but when."


Leading operations with a focus on efficiency, team alignment, and delivering consistent, high-quality experiences across every customer interaction.



Built on experience. Driven by the next generation.



With multiple stocking locations across the U.S., Vertical Cable delivers fast, reliable service nationwide — **your one-stop shop for low voltage and fiber solutions.**

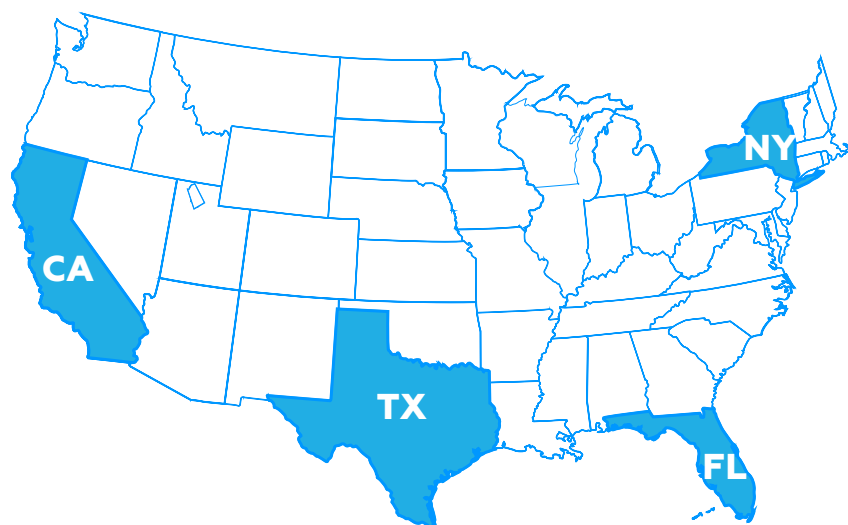

West Coast: Our Murrieta, California facility supports customers across the Western U.S., Central regions, and Alaska. **North East:** Our New Windsor, New York facility serves Canada, the East Coast, and Central U.S. Southern Region: **Our headquarters** in North Miami, Florida supports Florida, the Caribbean, and South America. Our Houston, **Texas location** serves the TOLA region (Texas, Oklahoma, Louisiana, Arkansas).

We also operate a state-of-the-art manufacturing facility focused on high-quality plenum copper cables, along with value-added services such as private labeling. Our Bonham, Texas fiber facility stocks a wide range of optical fiber cables and serves as a central hub for managing and fulfilling bulk fiber orders.

FLORIDA (HQ)

Headquarters

2885 SW 30th Avenue, Pembroke Park, FL 33009

Business Hours:

Monday - Friday 8:00 AM - 5:00 PM (EST)

800-749-2447 phone

CALIFORNIA

Address:

41715 Cherry Street, Murrieta, CA 92562

Business Hours:

Monday - Friday: 7:00 AM - 4:00 PM (PST)

NEW YORK

Address:

9 Tarkett Drive, Unit 30, New Windsor, NY 12553

Business Hours:

Monday - Friday 8:00 AM - 5:00 PM (EST)

TEXAS

Address:

4647 Pine Timbers St., Ste 120, Houston, TX 77041

Business Hours:

Monday - Friday 8:00 AM - 4:30 PM (CST)



VerticalCable.com

1. COPPER

8	CAT6A
14	CAT6
22	CAT5E
30	CAT3
32	Audio
34	Coax
42	Access Control
44	Security
48	Fire Alarm
50	Thermostat Wire
51	LED Cable

1.1. COPPER CONNECTIVITY

54	V-Max Keystone Jacks
56	Keystone Couplers
57	Inline Couplers
57	Junction Boxes
59	Keystone Wall Plates
61	Surface-Mount Mounting Boxes
61	Dry-Wall Brackets
61	Feedthrough Wall Plates
62	Surface Mount Boxes
64	Patch Panels
70	Panel Covers
70	Network Brush Panels
72	Patch Cords
76	HDMI Digital Cables and Accessories
77	Keystone Inserts and Coax Connectors
78	Modular Plugs
79	Slip-On Boots
80	Tools

2. OPTICAL FIBER

84	Outside Plant (OSP)
86	Inside Plant (ISP)

2.1. FIBER CONNECTIVITY

90	Wall Outlets & Surface-Mount Boxes
92	Rack-Mount Panels
92	Cable Management Bars
93	Rack-Mount Enclosures
94	Wall-Mount Enclosures
96	Wall-Mount Boxes & Accessories
98	Connectivity Node
99	DIN-Rail Modular Cassettes
100	LGX Adapter Plates
102	Optical Fiber Adapters
104	Modular Connector Assemblies
106	Mechanical Plugs
107	Epoxy Plugs
108	Mechanical Splicing Tool Kit
108	Cleavers
109	Fiber Cleaning Kit
110	Splice Trays/Cassettes
111	Sleeves and Splice Holders
111	Fan-Out Kits
112	Pigtails
113	Optical Fiber Patch Cords
114	OSP Transition Boxes
115	OSP Splice Closures
116	OSP Tension Clamps
116	OSP Hooks and Brackets
117	OSP Steel Banding
118	Tools
119	VFL, Light Source, Power Meter
119	Test Leads

3. CABLE MANAGEMENT & RACKS

122	Raceways and Accessories
123	Cable Ties
123	Hook and Loop Strap
123	Mounting Bases
124	J-Hooks and D Rings
125	Bridle Rings
126	Wire Managers
127	Support Brackets
127	Screws, Washers & Cage Nuts
127	Power Strip
128	Wall-Mount Brackets
130	Open Rack Enclosures
131	Wire Managers
132	Wall-Mount Racks
136	Wall-Mount Enclosures
138	Network & Server Cabinets
139	DVR Lockboxes & Mounting Brackets
140	Shelves

4. INDUSTRIAL & HARSH ENVIROMENTS

144	IP-Rated Boxes
145	Outlet/Terminal Modules
146	Ruggedized Patch Cords
147	Coupler Modules
149	Ruggedized Field-Terminatable Plugs
150	DIN-Rail Products
152	Industrial Switches
153	SFP Transceivers




1.

COPPER

CAT6A CABLES

CAT6A		
	UTP (Unshielded)	F/UTP (Overall Shield)
CMP (Plenum)	ETL - USA 176-300/A/P/BK 176-305/A/P/BL 176-310/A/P/GR 176-315/A/P/GY 176-320/A/P/OR 176-325/A/P/PK 176-330/A/P/PR 176-335/A/P/RD 176-340/A/P/WH 176-345/A/P/YL ETL 065-700/A/P/BK 065-701/A/P/BL 065-702/A/P/GR 065-703/A/P/GY 065-705/A/P/PR 065-707/A/P/WH 065-708/A/P/YL	ETL 165-500/A/PS/BK 165-501/A/PS/BL 165-502/A/PS/GR 165-503/A/PS/GY 165-508/A/PS/WH 165-509/A/PS/YL
CMR (Riser)	ETL 064-484/A/BK 064-485/A/BL 064-486/A/WH 064-687/A/GR 064-688/A/GY 064-689/A/OR 064-691/A/PR 064-692/A/RD 064-693/A/YL	ETL 064-700/A/S/BK 064-701/A/S/BL 064-702/A/S/GR 064-703/A/S/GY 064-704/A/S/OR 064-706/A/S/PR 064-707/A/S/RD 064-708/A/S/WH 064-709/A/S/YL
CM - 28 AWG Stranded (Slim) Cordage (slim patch cords)	UL 173-200/ST/BK 173-201/ST/BL 173-208/ST/WH	N/A
Outdoor (UV)		
CMX	ETL 069-564/A/CMX	N/A
Direct Burial		
Dual jacket	N/A	ETL 069-565/A/CMXT

CAT6A Plenum UTP

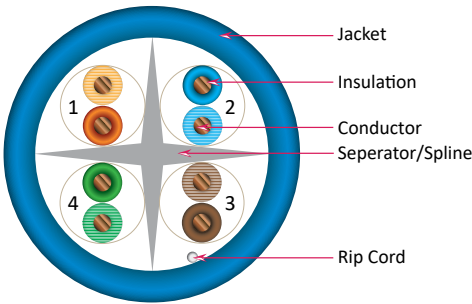

Features:

- Meets or exceeds ANSI/TIA-568.2-D
- Supports PoE Type 4 IEEE 802.3bt up to 90-100 W
- Supports IEEE 802.3 technologies up to 10 Gb/s (802.3an 10 GBASE-T)
- 23-AWG solid bare copper conductors
- Central spline and internally-ribbed jacket ensure excellent X-talk performance
- HDBase-T A & B


Compatible with VC RJ45 plugs:
012-021-100 | 012-025/EZF-100 | 012-026/EZF-100

Item #	Description
176-300/A/P/BK	CAT6A, PoE Type 4, 23 AWG, 4 Pair, 750 MHz, UTP, CMP, 1000 ft, Black
176-305/A/P/BL	CAT6A, PoE Type 4, 23 AWG, 4 Pair, 750 MHz, UTP, CMP, 1000 ft, Blue
176-310/A/P/GR	CAT6A, PoE Type 4, 23 AWG, 4 Pair, 750 MHz, UTP, CMP, 1000 ft, Green
176-315/A/P/GY	CAT6A, PoE Type 4, 23 AWG, 4 Pair, 750 MHz, UTP, CMP, 1000 ft, Gray
176-320/A/P/OR	CAT6A, PoE Type 4, 23 AWG, 4 Pair, 750 MHz, UTP, CMP, 1000 ft, Orange
176-325/A/P/PK	CAT6A, PoE Type 4, 23 AWG, 4 Pair, 750 MHz, UTP, CMP, 1000 ft, Pink
176-330/A/P/PR	CAT6A, PoE Type 4, 23 AWG, 4 Pair, 750 MHz, UTP, CMP, 1000 ft, Purple
176-335/A/P/RD	CAT6A, PoE Type 4, 23 AWG, 4 Pair, 750 MHz, UTP, CMP, 1000 ft, Red
176-340/A/P/WH	CAT6A, PoE Type 4, 23 AWG, 4 Pair, 750 MHz, UTP, CMP, 1000 ft, White
176-345/A/P/YL	CAT6A, PoE Type 4, 23 AWG, 4 Pair, 750 MHz, UTP, CMP, 1000 ft, Yellow



CAT6A Cable » CAT6A PLENUM

CAT6A Plenum UTP - ETL

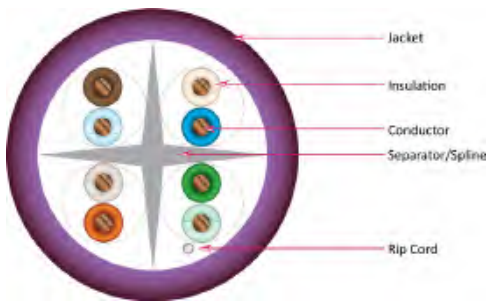


Features:

- Meets or exceeds ANSI/TIA-568.2-D
- Supports PoE Type 4 (IEEE 802.3bt) up to 100 W
- Supports IEEE 802.3 technologies up to 10 Gb/s (802.3an 10 GBASE-T)
- 23-AWG solid bare copper conductors
- Central spline and internally-ribbed jacket ensure excellent X-talk performance

Compatible with VC RJ45 plugs:
012-021-100 | 012-024/10G | 012-025/EZF-100
012-026/EZF-100

Item #	Description
065-700/A/P/BK	CAT6A, PoE Type 4, 23 AWG, 4 Pair, 750 MHz, UTP, CMP, 1000 ft, Black
065-701/A/P/BL	CAT6A, PoE Type 4, 23 AWG, 4 Pair, 550 MHz, UTP, CMP, 1000 ft, Blue
065-702/A/P/GR	CAT6A, PoE Type 4, 23 AWG, 4 Pair, 550 MHz, UTP, CMP, 1000 ft, Green
065-703/A/P/GY	CAT6A, PoE Type 4, 23 AWG, 4 Pair, 550 MHz, UTP, CMP, 1000 ft, Gray
065-705/A/P/PR	CAT6A, PoE Type 4, 23 AWG, 4 Pair, 550 MHz, UTP, CMP, 1000 ft, Purple
065-707/A/P/WH	CAT6A, PoE Type 4, 23 AWG, 4 Pair, 550 MHz, UTP, CMP, 1000 ft, White

CAT6A Plenum F/UTP (Overall Shield)

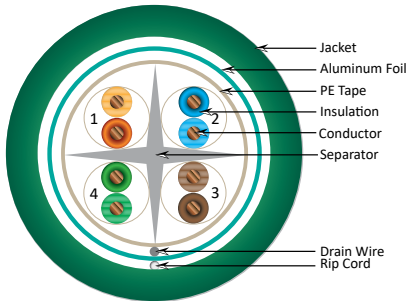

Features:

- Supports PoE Type 4 (IEEE 802.3bt) up to 100 W
- Exceeds ANSI/TIA-568.2-D and ISO/IEC 11801
- 23-AWG solid bare copper conductors
- ETL-Listed, RoHS-Compliant
- 1000 ft Wooden Spool


Compatible with VC RJ45 plugs:
012-021-100 | 012-024/10G | 012-026/EZF-100

Item #	Description
165-500/A/PS/BK	CAT6A, PoE Type 4, 23 AWG, 4 Pair, 750 MHz, UTP, CMP, 1000 ft, Black
165-501/A/PS/BL	CAT6A, PoE Type 4, 23 AWG, 4 Pair, 750 MHz, UTP, CMP, 1000 ft, Blue
165-502/A/PS/GR	CAT6A, PoE Type 4, 23 AWG, 4 Pair, 750 MHz, UTP, CMP, 1000 ft, Green
165-503/A/PS/GY	CAT6A, PoE Type 4, 23 AWG, 4 Pair, 750 MHz, UTP, CMP, 1000 ft, Gray
165-508/A/PS/WH	CAT6A, PoE Type 4, 23 AWG, 4 Pair, 750 MHz, UTP, CMP, 1000 ft, White
165-509/A/PS/YL	CAT6A, PoE Type 4, 23 AWG, 4 Pair, 750MHz, UTP, CMP, 1000 ft, Yellow

[CAT6A Patch Panels](#)

P64

CAT6A Riser UTP (Unshielded)

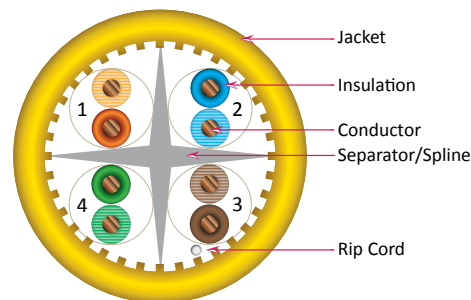

Features:


- Supports PoE Type 4 (IEEE 802.3bt) up to 100 W
- Exceeds ANSI/TIA-568.2-D and ISO/IEC 11801
- 23-AWG solid bare copper conductors
- ETL-listed, RoHS-Compliant
- 1000 ft Wooden Spool

Compatible with VC RJ45 plugs:

012-021-100 | 012-025/EZF-100 |
012-026/EZF-100

Item #	Description
064-484/A/BK	CAT6A, PoE Type 4, 750 MHz, UTP, CMR, 1000 ft, Spool, Black
064-485/A/BL	CAT6A, PoE Type 4, 750 MHz, UTP, CMR, 1000 ft, Spool, Blue
064-688/A/GY	CAT6A, PoE Type 4, 750 MHz, UTP, CMR, 1000 ft, Spool, Gray
064-687/A/GR	CAT6A, PoE Type 4, 750 MHz, UTP, CMR, 1000 ft, Spool, Green
064-692/A/RD	CAT6A, PoE Type 4, 750 MHz, UTP, CMR, 1000 ft, Spool, Red
064-486/A/WH	CAT6A, PoE Type 4, 750 MHz, UTP, CMR, 1000 ft, Spool, White
064-693/A/YL	CAT6A, PoE Type 4, 750 MHz, UTP, CMR, 1000 ft, Spool, Yellow
064-689/A/OR	CAT6A, PoE Type 4, 750 MHz, UTP, CMR, 1000 ft, Spool, Orange
064-695/A/RB/BL	CAT6A, PoE Type 4, 750 MHz, UTP, CMR, 1000 ft, Reel in a Box

CAT6A Solid Riser F/UTP (Overall Shield)

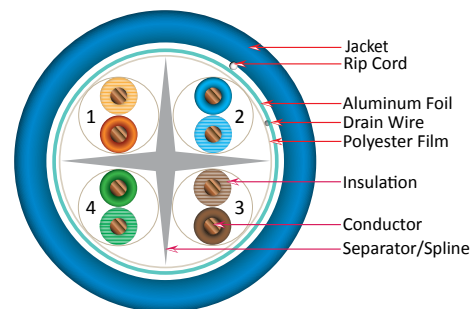

Features:

- Supports PoE Type 4 (IEEE 802.3bt) up to 100 W
- Exceeds ANSI/TIA-568.2-D and ISO/IEC 11801
- 23-AWG solid bare copper conductors
- ETL-listed, RoHS-Compliant
- 1000 ft Wooden Spool


Compatible with VC RJ45 plugs:

012-021-100 | 012-024/10G | 012-026/EZF-100

Item #	Description
064-700/A/S/BK	CAT6A, PoE Type 4, 750 MHz, F/UTP, CMR, 1000 ft, Spool, Black
064-701/A/S/BL	CAT6A, PoE Type 4, 750 MHz, F/UTP, CMR, 1000 ft, Spool, Blue
064-702/A/S/GR	CAT6A, PoE Type 4, 750 MHz, F/UTP, CMR, 1000 ft, Spool, Green
064-703/A/S/GY	CAT6A, PoE Type 4, 750 MHz, F/UTP, CMR, 1000 ft, Spool, Gray
064-707/A/S/RD	CAT6A, PoE Type 4, 750 MHz, F/UTP, CMR, 1000 ft, Spool, Red
064-704/A/S/OR	CAT6A, PoE Type 4, 750 MHz, F/UTP, CMR, 1000 ft, Spool, Orange
064-708/A/S/WH	CAT6A, PoE Type 4, 750 MHz, F/UTP, CMR, 1000 ft, Spool, White
064-709/A/S/YL	CAT6A, PoE Type 4, 750 MHz, F/UTP, CMR, 1000 ft, Spool, Yellow

CAT6A Slim Cable

CAT6A Slim Stranded CM-Rated UTP (Unshielded)

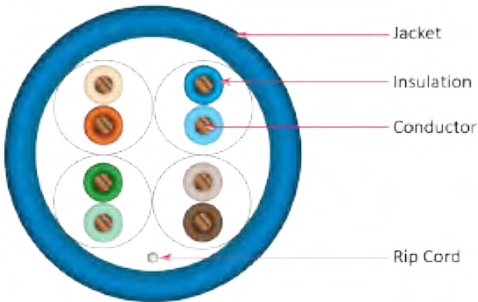

Features:

- Supports PoE Type 1 (IEEE 802.3af) up to 15.4 W
- 28-AWG stranded bare copper conductors
- RoHS-Compliant

Compatible with VC RJ45 plugs:
012-027SLM-100

**Need a specific length?
Create custom-length
patch cords on-site
with ease.**

Item #	Description
173-200/ST/BK	CAT6A, PoE Type 1, Stranded, 1000 ft, Box, Black
173-201/ST/BL	CAT6A, PoE Type 1, Stranded, 1000 ft, Box, Blue
173-208/ST/WH	CAT6A, PoE Type 1, Stranded, 1000 ft, Box, White


Related products:




012-027SLM-100
Slim Modular Plug
with a loading bar

017-067TR-100
Slip-on Boot

P79

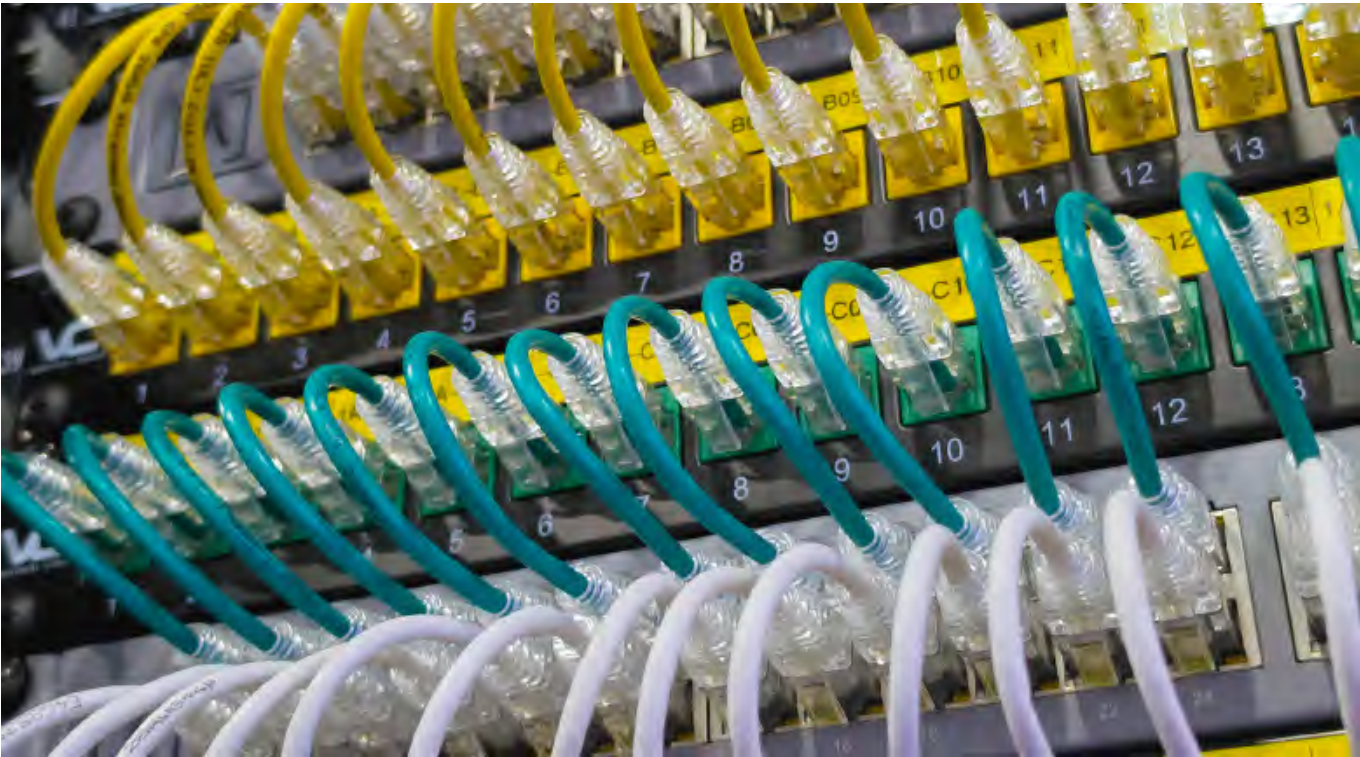

CAT6A Outdoor-Rated - CMX

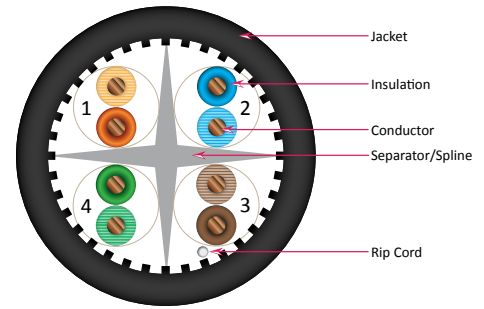

Features:

- Supports PoE Type 4 (IEEE 802.3bt) up to 100 W
- Outdoor- and UV-Resistant Jacket Material
- For outdoor use above ground
- 23-AWG solid bare copper conductors
- Exceeds ANSI/TIA-568.2-D and ISO/IEC 11801
- Supports High-Speed Data Applications
- ETL-listed, RoHS-Compliant
- 1000 ft Wooden Spool

Compatible with VC RJ45 plugs:


012-021-100 | 012-025-EZF-100 | 012-026-EZF-100

Item #	Description
069-564/A/CMX	CAT6A, PoE Type 4, 750MHz, Outdoor, CMX, 23 AWG, 4 Pair, UTP, 1000 ft, Spool, Black

[CAT6A Couplers IP68](#)

[P147](#)

CAT6A Outdoor-Rated, Direct Burial - CMX (DUAL JACKET)

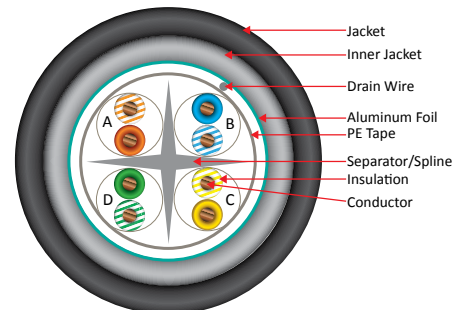

Features:

- For outdoor use above ground and/or direct burial
- Supports PoE Type 4 (IEEE 802.3bt) up to 100 W
- Outdoor- and UV-Resistant Jacket Material
- 23-AWG solid bare copper conductors
- Exceeds ANSI/TIA-568.2-D and ISO/IEC 11801
- Supports High-Speed Data Applications including Ethernet 10 Gigabit
- ETL-listed, RoHS-Compliant
- 1000 ft Wooden Spool

Compatible with VC RJ45 plugs:

012-021-100 | 012-024/10G | 012-026-EZF-100

Item #	Description
069-565/A/CMXT	CAT6A, PoE Type 4, 600 MHz. Direct Burial or Cell Tower Applications, CMXT, F/UTP - Shielded, Dual Jacket, 23 AWG, 4 Pair, 1000 ft, Spool, Black



For a proper RJ45 plug fit, you must trim the outer jacket of the cable




[CAT6A Ruggedized RJ45 Plugs](#)

[P149](#)

CAT6 CABLE

CAT6			
	UTP (Unshielded)		F/UTP (Overall Shield)
CMP	ETL - USA	N/A	ETL
	166-250/P/BK 166-251/P/BL 166-252/P/GR 166-253/P/GY 166-254/P/OR 166-255/P/PK 166-256/P/PR 166-257/P/RD 166-258/P/WH 166-259/P/YL ETL 066-990/P/BK 066-991/P/BL 066-992/P/GR 066-993/P/GY 066-994/P/OR 066-996/P/PR 066-998/P/WH 066-999/P/YL		168-400/S/P/BK 168-401/S/P/BL 168-402/S/P/GR 168-403/S/P/GY 168-406/S/P/PR 168-407/S/P/RD 168-408/S/P/WH 168-409/S/P/YL
CMR	ETL	UL	ETL
	060-2395/OR 060-487/BK 060-488/BL 060-489/GR 060-490/GY 060-491/PR 060-492/RD 060-493/WH 060-494/YL 060-495/PK ETL - Splineless 060-550/SL/BK 060-552/SL/BL 060-554/SL/GR 060-566/SL/WH 060-568/SL/YL	060-610/U/BK 060-612/U/BL 060-614/U/GR 060-626/U/WH 060-628/U/YL	062-502/S/PR 062-503/S/BK 062-504/S/BL 062-505/S/GR 062-506/S/GY 062-507/S/OR 062-508/S/RD 062-509/S/WH 062-510/S/YL
Outdoor (UV)			
CMX	ETL 069-559/CMX 069-330/CMX - TAA-Compliant		N/A
with Messenger	ETL 069-562/MESG		ETL 069-563/S/MESG
Direct Burial			
Double jacket	ETL 069-557/US/CMXT		ETL 069-556/CMXT2K 069-561/CMXT
Gel-flooded core	ETL 069-560/CMXF		ETL 069-558/S/CMXF

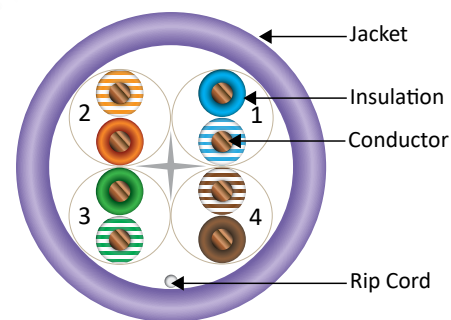
CAT6 UTP Plenum-Rated - Unshielded - ETL**Features:**

- Supports PoE Type 3 (IEEE 802.3bt) up to 60 W
- Supports High-Speed Data Applications
- 23-AWG solid bare copper conductors
- Moisture-Resistant Box equipped with easy-to-pull tube
- Excellent Insertion Loss and Crosstalk Characteristics
- ETL-listed, RoHS-Compliant

Compatible with VC RJ45 plugs:

012-021-100 | 012-022-100 | 012-023/EZF-100

Item #	Description
166-250/P/BK	CAT6 PoE Type 3, 550 MHz, 23 AWG, UTP, 1000 ft, Pullout Box, Black
166-251/P/BL	CAT6 PoE Type 3, 550 MHz, 23 AWG, UTP, 1000 ft, Pullout Box, Blue
166-252/P/GR	CAT6 PoE Type 3, 550 MHz, 23 AWG, UTP, 1000 ft, Pullout Box, Green
166-253/P/GY	CAT6 PoE Type 3, 550 MHz, 23 AWG, UTP, 1000 ft, Pullout Box, Gray
166-254/P/OR	CAT6 PoE Type 3, 550 MHz, 23 AWG, UTP, 1000 ft, Pullout Box, Orange
166-255/P/PK	CAT6 PoE Type 3, 550 MHz, 23 AWG, UTP, 1000 ft, Pullout Box, Pink
166-256/P/PR	CAT6 PoE Type 3, 550 MHz, 23 AWG, UTP, 1000 ft, Pullout Box, Purple
166-257/P/RD	CAT6 PoE Type 3, 550 MHz, 23 AWG, UTP, 1000 ft, Pullout Box, Red
166-258/P/WH	CAT6 PoE Type 3, 550 MHz, 23 AWG, UTP, 1000 ft, Pullout Box, White
166-259/P/YL	CAT6 PoE Type 3, 550 MHz, 23 AWG, UTP, 1000 ft, Pullout Box, Yellow

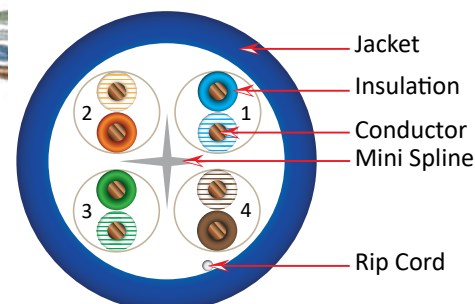
CAT6 UTP Plenum-Rated - Unshielded - UL**Features:**

- Supports PoE Type 3 (IEEE 802.3bt) up to 60 W
- Supports High-Speed Data Applications
- 23-AWG solid bare copper conductors
- Moisture-Resistant Box equipped with easy-to-pull tube
- Excellent Insertion Loss and Crosstalk Characteristics
- ETL-listed, RoHS-Compliant

Item #	Description
167-101/P/BL	CAT6 PoE Type 3, 550 MHz, 23 AWG, UTP, 1000 ft, Pullout Box, Blue
167-108/P/WH	CAT6 PoE Type 3, 550 MHz, 23 AWG, UTP, 1000 ft, Pullout Box, White

Custom colors available upon request

CAT6 UTP Plenum-Rated - ETL

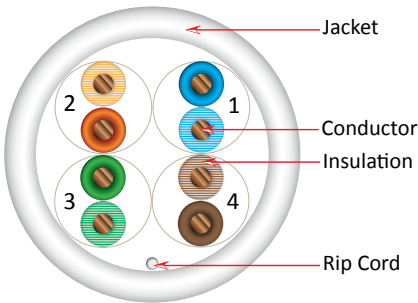

Features:


- Splinelless
- Outer jacket LS-PVC
- Supports PoE Type 3 (IEEE802.3bt) up to 60W
- 23-AWG solid bare copper conductors
- ETL-Listed, RoHS-Compliant

Compatible with VC RJ45 plugs:
012-021-100 | 012-022-100 | 012-023/EZF-100

Item #	Description
066-990/P/BK	CAT6 PoE Type 3, 550 MHz Cable, 23 AWG, UTP, 1000 ft, Black - ETL
066-991/P/BL	CAT6 PoE Type 3, 550 MHz Cable, 23 AWG, UTP, 1000 ft, Blue - ETL
066-992/P/GR	CAT6 PoE Type 3, 550 MHz Cable, 23 AWG, UTP, 1000 ft, Green - ETL
066-993/P/GY	CAT6 PoE Type 3, 550 MHz Cable, 23 AWG, UTP, 1000 ft, Gray - ETL
066-994/P/OR	CAT6 PoE Type 3, 550 MHz Cable, 23 AWG, UTP, 1000 ft, Orange - ETL
066-996/P/PR	CAT6 PoE Type 3, 550 MHz Cable, 23 AWG, UTP, 1000 ft, Purple - ETL
066-998/P/WH	CAT6 PoE Type 3, 550 MHz Cable, 23 AWG, UTP, 1000 ft, White - ETL
066-999/P/YL	CAT6 PoE Type 3, 550 MHz Cable, 23 AWG, UTP, 1000 ft, Yellow - ETL

Plenum-Rated cable ties **P123**

CAT6 F/UTP Plenum-Rated - Overall Shield

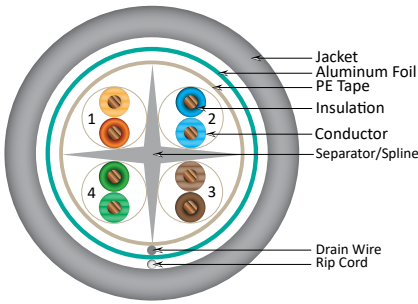

Features:



- Supports PoE Type 4 (IEEE 802.3bt) up to 100 W
- 23-AWG solid bare copper conductors
- Exceeds ANSI/TIA-568.2-D and ISO/IEC 1180
- ETL-listed, RoHS-Compliant
- 1000 ft Wooden Spool

Compatible with VC RJ45 plugs:
012-021-100 | 012-026/EZF-100

Item #	Description
168-400/S/P/BK	CAT6 PoE Type 4, 550 MHz 23 AWG, F/UTP 1000 ft, Black
168-401/S/P/BL	CAT6 PoE Type 4, 550 MHz 23 AWG, F/UTP 1000 ft, Blue
168-402/S/P/GR	CAT6 PoE Type 4, 550 MHz 23 AWG, F/UTP 1000 ft, Green
168-403/S/P/GY	CAT6 PoE Type 4, 550 MHz 23 AWG, F/UTP 1000 ft, Gray
168-408/S/P/WH	CAT6 PoE Type 4, 550 MHz 23 AWG, F/UTP 1000 ft, White
168-409/S/P/YL	CAT6 PoE Type 4, 550 MHz 23 AWG, F/UTP 1000 ft, Yellow

CAT6 Shielded Patch Panels **P65**

CAT6 CMR UTP Riser-Rated

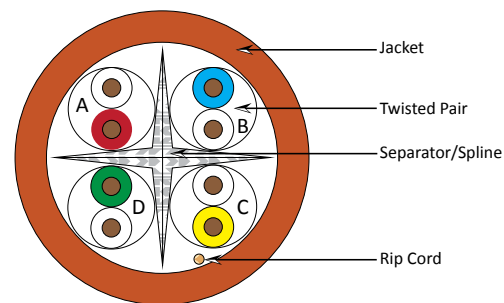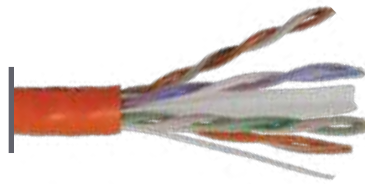

Features:


- Supports PoE Type 4 (IEEE 802.3bt) up to 100 W
- 23-AWG solid bare copper conductors
- Exceeds ANSI/TIA-568.2-D and ISO/IEC 11801
- RoHS-Compliant
- 1000 ft Box

Compatible with VC RJ45 plugs:
012-022-100 | 012-023/EZF-100

Item #	Description
060-610/U/BK	CAT6 PoE Type 4, 550 MHz, 23 AWG, UTP, 1000 ft, Black
060-612/U/BL	CAT6 PoE Type 4, 550 MHz, 23 AWG, UTP, 1000 ft, Blue
060-614/U/GR	CAT6 PoE Type 4, 550 MHz, 23 AWG, UTP, 1000 ft, Green
060-626/U/WH	CAT6 PoE Type 4, 550 MHz, 23 AWG, UTP, 1000 ft, Gray
060-628/U/YL	CAT6 PoE Type 4, 550 MHz, 23 AWG, UTP, 1000 ft, Orange

[CAT6 Modular Plugs](#)
[P78](#)

CAT6 CMR UTP Riser-Rated - ETL

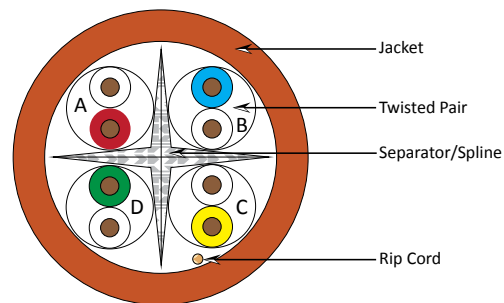

Features:


- Supports PoE Type 4 (IEEE 802.3bt) up to 100 W
- 23-AWG solid bare copper conductors
- Exceeds ANSI/TIA-568.2-D and ISO/IEC 11801
- ETL-listed, RoHS-Compliant
- 1000 ft Box

Compatible with VC RJ45 plugs:
012-022-100 | 012-023/EZF-100

Item #	Description
060-487/BK	CAT6 PoE Type 4, 550 MHz, 23 AWG, UTP, 1000 ft, ETL, Black
060-488/BL	CAT6 PoE Type 4, 550 MHz, 23 AWG, UTP, 1000 ft, ETL, Blue
060-489/GR	CAT6 PoE Type 4, 550 MHz, 23 AWG, UTP, 1000 ft, ETL, Green
060-490/GY	CAT6 PoE Type 4, 550 MHz, 23 AWG, UTP, 1000 ft, ETL, Gray
060-2395/OR	CAT6 PoE Type 4, 550 MHz, 23 AWG, UTP, 1000 ft, ETL, Orange
060-495/PK	CAT6 PoE Type 4, 550 MHz, 23 AWG, UTP, 1000 ft, ETL, Pink
060-491/PR	CAT6 PoE Type 4, 550 MHz, 23 AWG, UTP, 1000 ft, ETL, Purple
060-492/RD	CAT6 PoE Type 4, 550 MHz, 23 AWG, UTP, 1000 ft, ETL, Red
060-493/WH	CAT6 PoE Type 4, 550 MHz, 23 AWG, UTP, 1000 ft, ETL, White
060-494/YL	CAT6 PoE Type 4, 550 MHz, 23 AWG, UTP, 1000 ft, ETL, Yellow

CAT6 Cable » CAT6 RISER

CAT6 CMR UTP Riser-Rated - ETL - Splineless

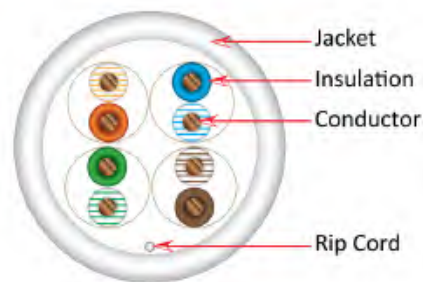

Features:


- Splineless
- Supports PoE Type 4 (IEEE 802.3bt) up to 100 W
- 23-AWG solid bare copper conductors
- Exceeds ANSI/TIA-568.2-D and ISO/IEC 11801
- ETL-listed, RoHS-Compliant
- 1000 ft Box

Compatible with VC RJ45 plugs:

012-022-100 | 012-023/EZF-100

Item #	Description
060-550/SL/BK	CAT6 PoE Type 4, 550 MHz, 23 AWG, UTP, 1000 ft, ETL, Black
060-552/SL/BL	CAT6 PoE Type 4, 550 MHz, 23 AWG, UTP, 1000 ft, ETL, Blue
060-554/SL/GR	CAT6 PoE Type 4, 550 MHz, 23 AWG, UTP, 1000 ft, ETL, Green
060-566/SL/WH	CAT6 PoE Type 4, 550 MHz, 23 AWG, UTP, 1000 ft, ETL, White
060-568/SL/YL	CAT6 PoE Type 4, 550 MHz, 23 AWG, UTP, 1000 ft, ETL, Yellow

CAT6 CMR F/UTP Riser-Rated - Overall Shield

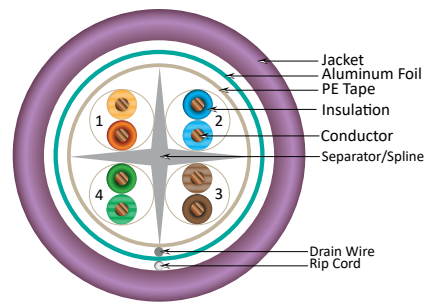

Features:


- Supports PoE Type 3 (IEEE 802.3bt) up to 60 W
- 23-AWG solid bare copper conductors
- Easy-to-See Vivid-Color Conductor Insulation
- Exceeds ANSI/TIA-568.2-D and ISO/IEC 11801
- ETL-listed, RoHS-Compliant
- 1000 ft Wooden Spool

Compatible with VC RJ45 plugs:

012-021-100 | 012-026/EZF-100

Item #	Description
062-503/S/BK	CAT6 PoE Type 3, 550 MHz, 23 AWG, F/UTP, 1000 ft, Black
062-504/S/BL	CAT6 PoE Type 3, 550 MHz, 23 AWG, F/UTP, 1000 ft, Blue
062-505/S/GR	CAT6 PoE Type 3, 550 MHz, 23 AWG, F/UTP, 1000 ft, Gray
062-506/S/GY	CAT6 PoE Type 3, 550 MHz, 23 AWG, F/UTP, 1000 ft, Green
062-507/S/OR	CAT6 PoE Type 3, 550 MHz, 23 AWG, F/UTP, 1000 ft, Orange
062-502/S/PR	CAT6 PoE Type 3, 550 MHz, 23 AWG, F/UTP, 1000 ft, Purple
062-508/S/RD	CAT6 PoE Type 3, 550 MHz, 23 AWG, F/UTP, 1000 ft, Red
062-509/S/WH	CAT6 PoE Type 3, 550 MHz, 23 AWG, F/UTP, 1000 ft, White
062-510/S/YL	CAT6 PoE Type 3, 550 MHz, 23 AWG, F/UTP, 1000 ft, Yellow

CAT6 Outdoor-Rated, CMX

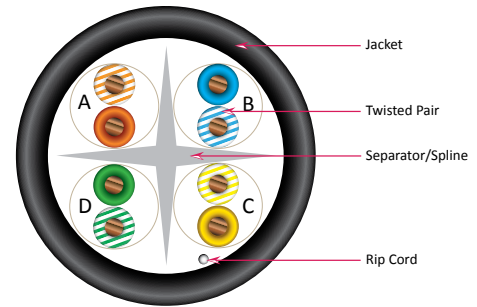

Features:

- Supports PoE Type 4 (IEEE 802.3bt) up to 100 W
- Unshielded Twisted-Pair (UTP) Construction
- Easily Identified Color-Striped Pairs
- 23-AWG solid bare copper conductors
- Exceeds ANSI/TIA-568.2-D and ISO/IEC 11801
- Outdoor- and UV-Resistant Jacket Material
- ETL-listed, RoHS-Compliant
- 1000 ft Wooden Spool




Compatible with VC RJ45 plugs:

012-021-100 | 012-022-100 | 012-023/EZF-100
012-025/EZF-100 | 012-026/EZF-100

Item #	Description
069-330/CMX	CAT6 PoE Type 4, 550 MHz, Outdoor Jacket, UV-Rated Jacket, CMX-Rated, 1000 ft, Black - TAA-Compliant
069-559/CMX	CAT6 PoE Type 4, 550 MHz, Outdoor Jacket, UV-Rated Jacket, CMX-Rated, 1000 ft, Black

CAT6 Outdoor-Rated With Messenger

Aerial Applications - Unshielded & Shielded

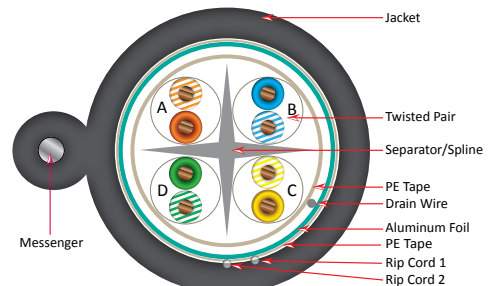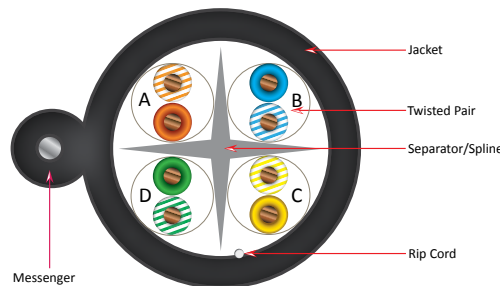

Features:

- Supports PoE Type 4 (IEEE 802.3bt) up to 100 W
- Galvanized Steel Messenger
- 23-AWG solid bare copper conductors
- Exceeds ANSI/TIA-568.2-D and ISO/IEC 11801
- Outdoor- and UV-Resistant Jacket Material
- ETL-listed, RoHS-Compliant
- 1000 ft Wooden Spool

Compatible with VC RJ45 plugs:

012-021-100 | 012-022-100 | 012-023/EZF-100
012-025/EZF-100 | 012-026/EZF-100





048-301/TC

P116

Item #	Description
069-562/MESG	CAT6 PoE Type 4, 550 MHz, UTP Unshielded , Outdoor-Rated with Messenger, Aerial Applications, LLDPE Jacket, 23 AWG, Solid Bare Copper, 1000 ft, Spool, Black
069-563/S/MESG	CAT6 PoE Type 4, 550 MHz, F/UTP Shielded , Outdoor-Rated with Messenger, Aerial Applications, LLDPE Jacket, 23 AWG, Solid Bare Copper, 1000 ft, Black

CAT6 Cable » CAT6 DIRECT BURIAL

CAT6 Direct Burial, CMX (DOUBLE JACKET)

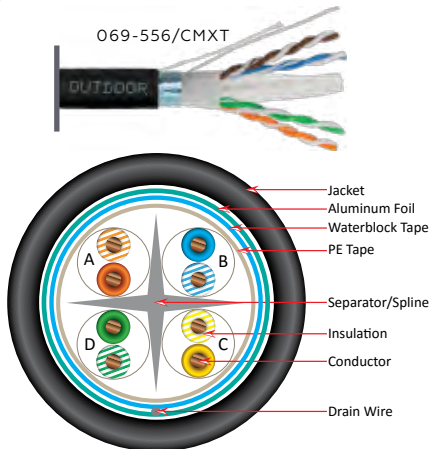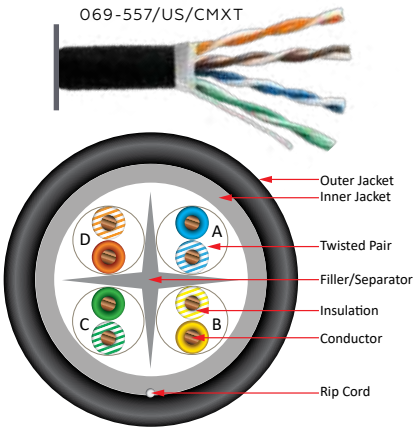

Features:

- Supports PoE Type 4 (IEEE 802.3bt) up to 100 W
- 23-AWG solid bare copper conductors
- Outdoor- and UV-Resistant Jacket Material
- Exceeds ANSI/TIA-568.2-D and ISO/IEC 11801
- ETL-listed, RoHS-Compliant
- 1000 ft Spool

Compatible with VC RJ45 plugs:
012-021-100 | 012-022-100 | 012-023/EZF-100
012-025/EZF-100 | 012-026/EZF-100



Item #	Description
069-557/US/CMXT	CAT6 PoE Type 4, 550 MHz, CMX Direct Burial, UTP Unshielded , Double Jacket, LLDPE Jacket, 23 AWG, Solid, 1000 ft, Black
069-556/CMXT2K	CAT6 PoE Type 4, 550 MHz, CMX, Direct Burial, LLDPE Jacket, F/UTP Shielded , 23 AWG, Double Jacket, 2000 ft, Black
069-561/CMXT	CAT6 PoE Type 4, 550 MHz, CMX, Direct Burial, LLDPE Jacket, F/UTP Shielded , 23 AWG, Double Jacket, 1000 ft, Black



For a proper RJ45 plug fit,
you must trim the outer
jacket of the cable



CAT6 Direct Burial, CMX (GEL-FLOODED CORE)
Unshielded & Shielded

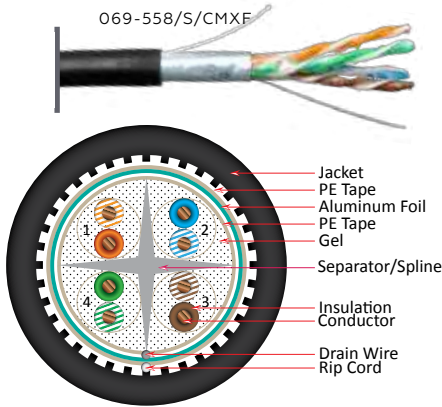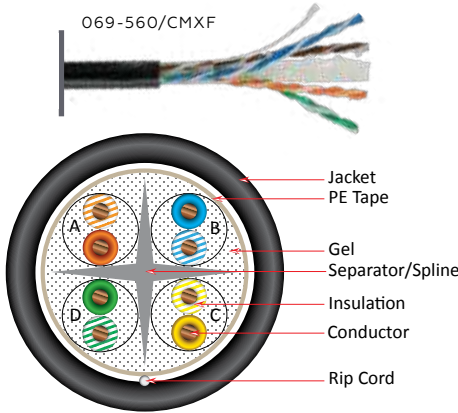

Features:

- Supports PoE Type 4 (IEEE 802.3bt) up to 100 W
- 23-AWG solid bare copper conductors
- Outdoor- and UV-Resistant Jacket Material
- Exceeds ANSI/TIA-568.2-D and ISO/IEC 11801
- ETL-listed, RoHS-Compliant
- 1000 ft Spool

Compatible with VC RJ45 plugs:
012-021-100 | 012-022-100 | 012-023/EZF-100
012-025/EZF-100 | 012-026/EZF-100

Item #	Description
069-560/CMXF	CAT6 PoE Type 4, 550 MHz, CMXF Direct Burial, Gel-Flooded Core, Unshielded , 23 AWG, Solid, Black
069-558/S/CMXF	CAT6 PoE Type 4, 550 MHz, CMXF Direct Burial, Gel-Flooded Core, Shielded , Drain Wire, 23 AWG, Black



Powering Commercial & Residential Installations

We are proud that VC products are trusted in hospitals, schools, stadiums, industrial facilities, and homes of every size — from condominiums to luxury residences.

ACCESS CONTROL



DATA CABLE



FIBER



AUDIO



SECURITY



COAX



FIRE ALARM



THERMOSTAT




LED



CAT5E CABLE

CAT5E		
	UTP (Unshielded)	F/UTP (Shielded)
CMP (Plenum)	ETL 055-452/P/BK 055-453/P/BL 055-454/P/GR 055-455/P/GY 055-456/P/PR 055-457/P/RD 055-458/P/WH 055-459/P/YL 055-460/P/OR 055-461/P/PK	ETL 057-905/S/P/BL
CMR (Riser)	ETL 054-444BK 054-445BL 054-446GR 054-447GY 054-448PR 054-449RD 054-450WH 054-451YL 054-2392OR	ETL 057-468/S/BK 057-469/S/BL 057-470/S/GR 057-471/S/GY 057-472/S/PR 057-473/S/RD 057-474/S/WH 057-475/S/YL 057-476/S/OR
Backbone Cable (non-plenum)	ETL 25-pair 054-452WH 054-453GY 054-454BL ETL 50-pair 054-455/BL	N/A
Outdoor (UV Jacket)		
CMX	ETL 059-484/CMX 059-484/CMX/WH 059-484/CMX/GY 059-488/WS/CMX 059-491/CMX2K	N/A
with Messenger	ETL 059-497/MESG	ETL 059-498/S/MESG
Direct Burial		
CMX - Double jacket	ETL 059-486/US/CMXT	ETL 059-486/CMXT 059-490/WS/CMXT 059-493/CMXT2K
CMX - Gel-flooded core	ETL 059-485/CMXF 059-489/WS/CMXF 059-488/CMXF25P (25-pair)	ETL 059-487/S/CMXF
CMX - Cell Towers	N/A	ETL 059-494/WS/CWT 059-494/RB/CWT 059-495/S1/CWT 059-496/S2/CWT

CAT5E CMP Plenum UTP - Unshielded

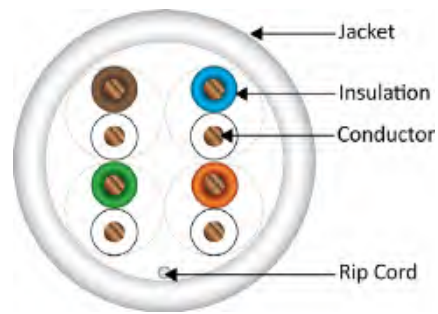

Features:

- Supports PoE Type 3 (IEEE 802.3bt) up to 60 W
- 24-AWG solid bare copper conductors
- Moisture-Resistant Box equipped with easy-to-pull tube
- Supports High-Speed Data Applications up to 1 Gbps
- ETL-listed, RoHS-Compliant
- 1000 ft Pull Box

Compatible with VC RJ45 plugs:
011-016-100 | 011-018/EZF-100

Item #	Description
055-452/P/BK	CAT5E PoE Type 3, 350 MHz, CMP, UTP, 1000 ft, Black
055-453/P/BL	CAT5E PoE Type 3, 350 MHz, CMP, UTP, 1000 ft, Blue
055-454/P/GR	CAT5E PoE Type 3, 350 MHz, CMP, UTP, 1000 ft, Green
055-455/P/GY	CAT5E PoE Type 3, 350 MHz, CMP, UTP, 1000 ft, Gray
055-456/P/PR	CAT5E PoE Type 3, 350 MHz, CMP, UTP, 1000 ft, Purple
055-457/P/RD	CAT5E PoE Type 3, 350 MHz, CMP, UTP, 1000 ft, Red
055-458/P/WH	CAT5E PoE Type 3, 350 MHz, CMP, UTP, 1000 ft, White
055-459/P/YL	CAT5E PoE Type 3, 350 MHz, CMP, UTP, 1000 ft, Yellow
055-460/P/OR	CAT5E PoE Type 3, 350 MHz, CMP, UTP, 1000 ft, Orange
055-461/P/PK	CAT5E PoE Type 3, 350 MHz, CMP, UTP, 1000 ft, Pink

Related products:

043 Series



[Blank Patch Panels](#) [P66](#)

351 Series



[V-Max Keystone Jacks](#) [P31](#)

092 Series



[CAT5E Patch Cords](#) [P75](#)

045-V34/75BK



[Hook and Loop Tie Wrap](#) [P123](#)

041 Series



[CAT5E Patch Panels](#) [P64](#)


040-371/C5J/WH



[CAT5E Junction Boxes](#) [P57](#)

CAT5E Cable » CAT5E RISER

CAT5E CMR Riser UTP - Unshielded

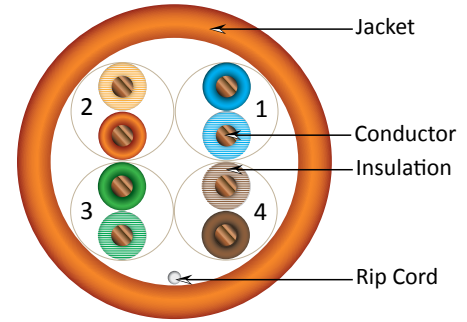


Features:

- Supports PoE Type 1 (IEEE 802.3af) up to 15.4 W
- 24-AWG solid bare copper conductors
- Supports High-Speed Data Applications up to 1 Gbps
- ETL-listed, RoHS-Compliant
- 1000 ft Pull Box

Compatible with VC RJ45 plugs:
011-016-100 | 011-018/EZF-100

Item #	Description
054-444BK	CAT5E PoE Type 1, 350 MHz, CMR, UTP, 1000 ft, Black
054-445BL	CAT5E PoE Type 1, 350 MHz, CMR, UTP, 1000 ft, Blue
054-446GR	CAT5E PoE Type 1, 350 MHz, CMR, UTP, 1000 ft, Green
054-447GY	CAT5E PoE Type 1, 350 MHz, CMR, UTP, 1000 ft, Gray
054-448PR	CAT5E PoE Type 1, 350 MHz, CMR, UTP, 1000 ft, Purple
054-449RD	CAT5E PoE Type 1, 350 MHz, CMR, UTP, 1000 ft, Red
054-2392OR	CAT5E PoE Type 1, 350 MHz, CMR, UTP, 1000 ft, Orange
054-450WH	CAT5E PoE Type 1, 350 MHz, CMR, UTP, 1000 ft, White
054-451YL	CAT5E PoE Type 1, 350 MHz, CMR, UTP, 1000 ft, Yellow

CAT5E CMR Riser F/UTP - Overall Shield

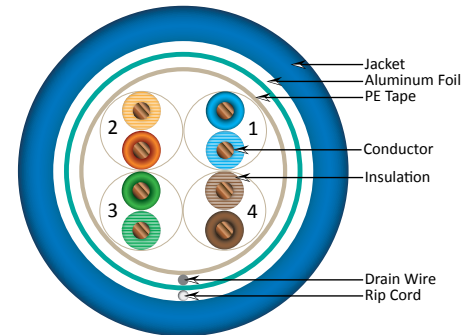


Features:

- Supports PoE Type 3 (IEEE 802.3bt) up to 60 W
- 24-AWG solid bare copper conductors
- Moisture-Resistant Box equipped with easy-to-pull tube
- Supports High-Speed Data Applications up to 1 Gbps
- ETL-listed, RoHS-Compliant
- 1000 ft Pull Box

Compatible with VC RJ45 plugs:
011-017-100 | 011-019/EZF-100 | 011-020G-100

Item #	Description
057-468/S/BK	CAT5E PoE Type 3, 350 MHz, F/UTP, 1000 ft, Black
057-469/S/BL	CAT5E PoE Type 3, 350 MHz, F/UTP, 1000 ft, Blue
057-470/S/GR	CAT5E PoE Type 3, 350 MHz, F/UTP, 1000 ft, Green
057-471/S/GY	CAT5E PoE Type 3, 350 MHz, F/UTP, 1000 ft, Gray
057-476/S/OR	CAT5E PoE Type 3, 350 MHz, F/UTP, 1000 ft, Orange
057-472/S/PR	CAT5E PoE Type 3, 350 MHz, F/UTP, 1000 ft, Purple
057-473/S/RD	CAT5E PoE Type 3, 350 MHz, F/UTP, 1000 ft, Red
057-474/S/WH	CAT5E PoE Type 3, 350 MHz, F/UTP, 1000 ft, White
057-475/S/YL	CAT5E PoE Type 3, 350 MHz, F/UTP, 1000 ft, Yellow

CAT5E 25 Pair Power Sum UTP - Unshielded

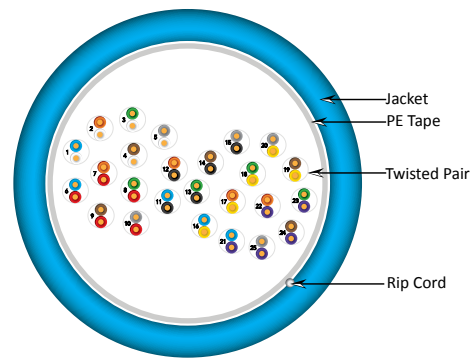

Features:



- Supports PoE Type 3 (IEEE 802.3bt) up to 60 W
- 24-AWG solid bare copper conductors
- Exceeds ANSI/TIA-568.2-D and ISO/IEC 11801
- ETL-listed, RoHS-Compliant
- 1000 ft Wooden Spool

Item #	Description
054-454BL	CAT5E PoE Type 3, 350 MHz, 25 Pair Power Sum, 24 AWG, Blue
054-453GY	CAT5E PoE Type 3, 350 MHz, 25 Pair Power Sum, 24 AWG, Gray
054-452WH	CAT5E PoE Type 3, 350 MHz, 25 Pair Power Sum, 24 AWG, White

[CAT5E Direct Burial
Cable, 25-Pair](#)

P29

CAT5E 50 Pair Power Sum UTP - Unshielded

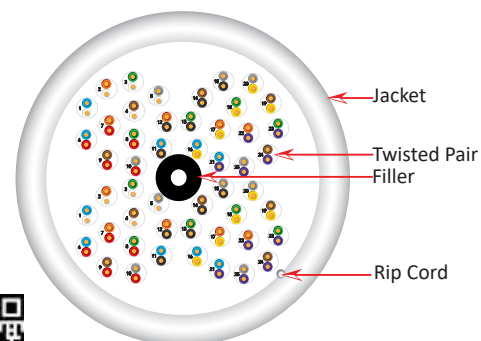

Features:

- Supports PoE Type 3 (IEEE 802.3bt) up to 60 W
- 24-AWG solid bare copper conductors
- Exceeds ANSI/TIA-568.2-D and ISO/IEC 11801
- ETL-listed, RoHS-Compliant
- 1000 ft Wooden Spool

Item #	Description
054-455/BL	CAT5E PoE Type 3, 350 MHz, 50 Pair Power Sum, 24 AWG, Blue
054-456/WH	CAT5E PoE Type 3, 350 MHz, 50 Pair Power Sum, 24 AWG, White




Four Stocking Locations

CAT5E Outdoor Cable, CMX - UTP - Unshielded



059-484/CMX

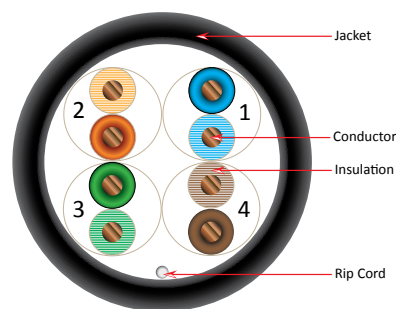

Features:

- Outdoor- and UV-Resistant Jacket Material
- Supports PoE Type 3 (IEEE 802.3bt) up to 60 W
- 24-AWG solid bare copper conductors
- Exceeds ANSI/TIA-568.2-D and ISO/IEC 11801
- ETL-listed, RoHS-Compliant
- 1000 ft Pull Box or 2000 ft Wooden Spool

Compatible with VC RJ45 plugs:

011-016-100 | 011-018/EZF-100

Item #	Description
059-484/CMX	CAT5E PoE Type 3, 350 MHz, UV Jacket, UTP CMX, 1000 ft, Black
059-484/CMX/GY	CAT5E PoE Type 3, 350 MHz, UV Jacket, UTP CMX, 1000 ft, Gray
059-484/CMX/WH	CAT5E PoE Type 3, 350 MHz, UV Jacket, UTP CMX, 1000 ft, White
059-488/WS/CMX	CAT5E PoE Type 3, 350 MHz, UV Jacket, UTP CMX, 1000 ft, Spool, Black
059-491/CMX2K	CAT5E PoE Type 3, 350 MHz, UV Jacket, UTP CMX, 2000 ft, Spool, Black

CAT5E Outdoor Cable, Cell Tower Applications





Cell Tower Applications



059-494/WS/CWT



059-495/S1/CWT

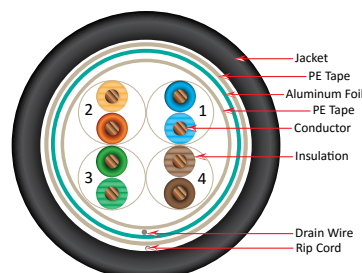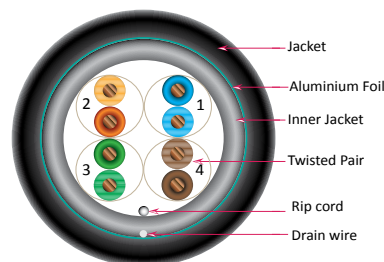

Features:

- Supports PoE Type 3 (IEEE 802.3bt) up to 60 W
- Outdoor- and UV-Resistant Jacket Material
- 24-AWG solid bare copper conductors
- Exceeds ANSI/TIA-568.2-D and ISO/IEC 11801
- ETL-listed, RoHS-Compliant
- 1000 ft Wooden Spool

Compatible with VC RJ45 plugs:

011-017-100 | 011-019/EZF-100 | 011-020G-100

Item #	Description
059-494/WS/CWT	CAT5E PoE Type 3, 350 MHz, Cell Tower Outdoor or Direct Burial, Shielded, Dual Jacket, 1000 ft, Spool, Black
059-494/RB/CWT	CAT5E PoE Type 3, 350 MHz, Cell Tower Outdoor or Direct Burial, Shielded, Dual Jacket, 1000 ft Reel-in-Box, Black
059-495/S1/CWT	CAT5E PoE Type 3, 350 MHz, Cell Tower Outdoor, Shielded, Drain Wire, 1000 ft, Spool, Black
059-496/S2/CWT	CAT5E PoE Type 3, 350 MHz, Cell Tower Outdoor, Shielded, 95% TC Braid, 1000 ft Spool, Black

CAT5E Cable » CAT5E OUTDOOR



CAT5E Outdoor Cable with Messenger for Aerial Applications



059-497/MESG



059-498/S/MESG

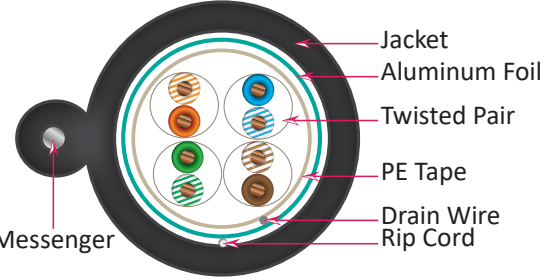

Features:

- Supports PoE Type 3 (IEEE 802.3bt) up to 60 W
- Galvanized Steel Messenger for Support
- Outdoor and UV-Resistant Jacket Material
- 24-AWG solid bare copper conductors
- Exceeds ANSI/TIA-568.2-D and ISO/IEC 11801
- ETL-listed, RoHS-Compliant
- 1000 ft Wooden Spool

Compatible with VC RJ45 plugs:

011-016-100 | 011-017-100 | 011-018/EZF-100
011-019/EZF-100 | 011-020G-100

Item

Description

059-497/MESG

CAT5E PoE Type 3, 350 MHz, UTP **Unshielded**,
Outdoor-Rated Cable with Messenger, Aerial Applications,
24 AWG, 1000 ft, Wooden Spool, Black

059-498/S/MESG

CAT5E PoE Type 3, 350 MHz, F/UTP **Shielded**,
Outdoor-Rated Cable with Messenger, Aerial Applications,
24 AWG, 1000 ft, Wooden Spool, Black




Aerial Applications




048-301/TC

P116



CAT5E Direct Burial, CMX (DUAL JACKET) - UTP & F/UTP



059-486/US/CMXT



059-486/CMXT

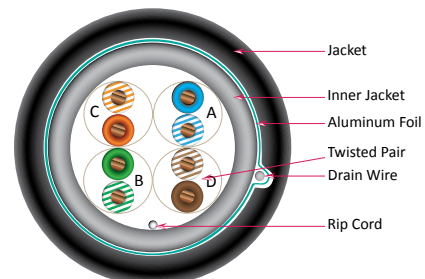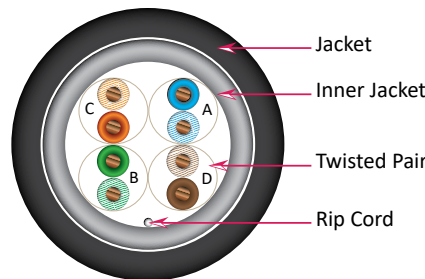

Features:

- Supports PoE Type 3 (IEEE 802.3bt) up to 60 W
- Outdoor and UV-Resistant Jacket Material
- 24-AWG solid bare copper conductors
- Exceeds ANSI/TIA-568.2-D and ISO/IEC 11801
- ETL-listed, RoHS-Compliant
- 1000 ft Pull Box or Wooden Spool

Compatible with VC RJ45 plugs:

011-017-100 | 011-019/EZF-100

Item

Description

059-486/US/
CMXT

CAT5E PoE Type 3, 350 MHz, Direct Burial, **Unshielded**, Dual Jacket,
Water-Resistant, LSZH Outer Jacket, 1000 ft Pull Box, Black

059-486/
CMXT

CAT5E PoE Type 3, 350 MHz, Direct Burial, **Shielded**, Dual Jacket,
Water-Resistant, LSZH Outer Jacket, 1000 ft Pull Box, Black

059-490/WS/
CMXT

CAT5E PoE Type 3, 350 MHz, Direct Burial, **Shielded**, Dual Jacket,
Water-Resistant, LSZH Outer Jacket, **1000 ft** Spool, Black

059-493/
CMXT2K

CAT5E PoE Type 3, 350 MHz, Direct Burial, **Shielded**, Dual Jacket,
Water-Resistant, LSZH Outer Jacket, **2000 ft** Spool, Black

CAT5E Direct Burial, CMX (GEL-FLOODED CORE) - UTP, F/UTP




Features:



- Supports PoE Type 3 (IEEE 802.3bt) up to 60 W
- Gel-Flooded Core
- Outdoor and UV-Resistant Jacket Material
- 24-AWG solid bare copper conductors
- Exceeds ANSI/TIA-568.2-D and ISO/IEC 11801
- ETL-listed, RoHS-Compliant
- 1000 ft Pull Box or Wooden Spool

Compatible with VC RJ45 plugs:


011-016-100 | 011-017-100 | 011-018/EZF-100
011-019/EZF-100 | 011-020G-100



059-485/CMXF

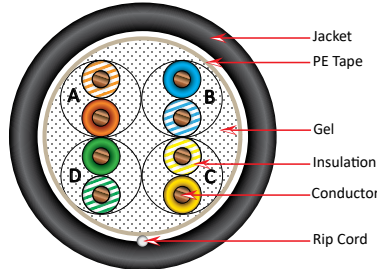


059-487/S/CMXF

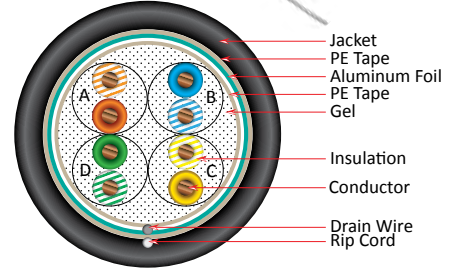

Item #	Description
059-485/CMXF	CAT5E PoE Type 3, 350 MHz, Direct Burial, Gel-Flooded Core, Unshielded , 1000 ft, Box, Black
059-489/WS/CMXF	CAT5E PoE Type 3, 350 MHz, Direct Burial, Gel-Flooded Core, Unshielded , 1000 ft, Spool, Black
059-487/S/CMXF	CAT5E PoE Type 3, 350 MHz, Direct Burial, Gel-Flooded Core, Shielded , Drain Wire, LLDPE Jacket, 1000 ft, Spool, Black

CAT5E 25 Pair Direct Burial

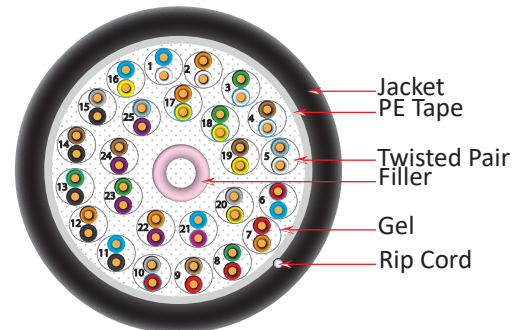

Features:

- Supports PoE Type 3 (IEEE 802.3bt) up to 60 W
- Gel-Flooded Core
- Outdoor and UV-Resistant Jacket Material
- 24-AWG solid bare copper conductors
- Exceeds ANSI/TIA-568.2-D and ISO/IEC 11801
- ETL-listed, RoHS-Compliant
- 1000 ft Wooden Spool


Item #	Description
059-488/CMXF25P	CAT5E PoE Type 3, 350 MHz, CMXF Direct Burial, Gel-Flooded Core, 50-Conductor, 24 AWG Solid Bare Copper, Black

CAT3 Cable


CAT3 Solid 25, 50, 100 Pair CMR UTP




052-441GY
25-pair

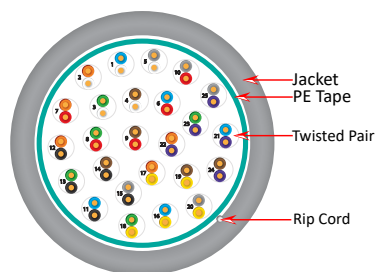

052-442GY
50-pair

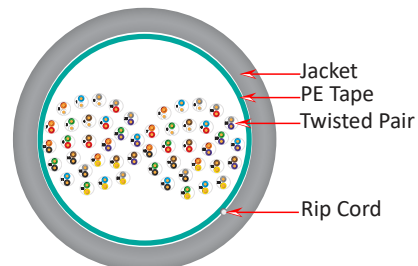

052-443GY
100-pair

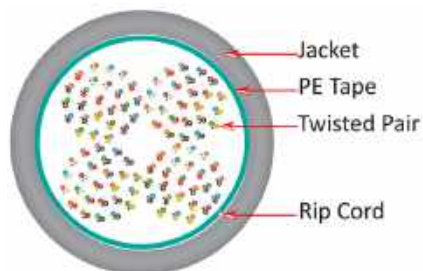

Features:

- 24 AWG Solid Bare Copper Conductors
- PE Tape, Rip Cord
- ETL-listed, RoHS-Compliant
- Riser Fire Safety Rating (CMR)
- Supplied in 1000 ft



Item #	Description
052-441GY	CAT3 UTP, 24 AWG, 25-Pair, Gray
052-442GY	CAT3 UTP, 24 AWG, 50-Pair, Gray
052-443GY	CAT3 UTP, 24 AWG, 100-Pair, Gray



Silver Satin: 4 & 6 Conductor



Features:

- Silver Satin Phone Cord
- 7-Strand CCA Conductors
- 4 Conductor (RJ11) & 6 Conductor (RJ12)
- RoHS-Compliant
- 1000 ft Spool



Item #	Description
091-719/4C/1K	Phone Cord, 4-Conductor , 28 AWG, Silver Satin, Stranded, 1000-ft Spool
091-722/6C/1K	Phone Cord, 6-Conductor , 28 AWG, Silver Satin, Stranded, 1000-ft Spool



Punch Down Blocks & Accessories




078-1025



091-1P/CC/WB/B



048-120/WDS

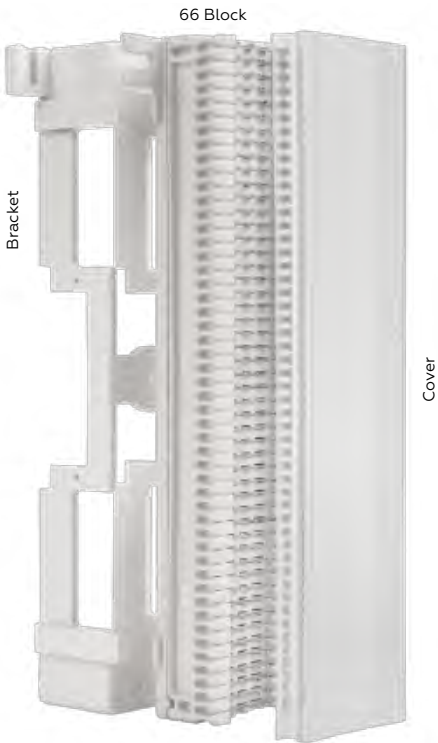

043-400/66K

Features:

- Industry-standard punch-down block design
- Wire spool guides and manages multipair cables
- Compatible with CAT3 and CAT5e multipair

Item #	Description
043-400/66K	66 Block, 50-Strip Punch down Block with Cover, Bracket and Labeling Strips
048-120/WDS	Wire Distribution Spool, White
091-1P/CC/WB/B	Cross Connect Cable, 1 Pair, 1000 ft
078-1025	Impact punch down tool with 110/88/66 blade



Telephone Cords (Terminated)



4C



6C



Features:

- Silver Satin Phone Cord
- 7-Strand CCA Conductors
- 6P4C (RJ11 Termination) and 6P6C (RJ12 Termination)
- RoHS-Compliant
- Available in 7 FT, 14 FT, 25 FT
- Straight-through pinout

Length	4 Conductor	6 Conductor
7 FT	091-701/4C/7S	091-710/6C/7S
14 FT	091-704/4C/14S	091-713/6C/14S
25 FT	091-707/4C/25S	091-716/6C/25S



Audio Cable

HIGH-STRAND AUDIO CABLE

UNSHIELDED

10/2

105 strand

209-2335/5WH - 500 ft spool

12/2	12/4	14/2	14/4	16/2	16/4	18/2	18/4
65 strand		41 strand		65 strand		16 strand	
209-2324/BK 500 ft pull box	209-2319/BK 500 ft spool	209-2320/BK 500 ft pull box	209-2321/BK 500 ft pull box	209-2315/BK 500 ft pull box	209-2316/BK 500 ft pull box	209-2328/BK 500 ft pull box	209-2329/BK 500 ft pull box
209-2324 500 ft pull box	209-2319 500 ft spool	209-2320 500 ft pull box	209-2321 500 ft pull box	209-2315 500 ft pull box	209-2316 500 ft pull box	209-2328 500 ft pull box	209-2329 500 ft pull box
		209-2320/PR 500 ft pull box	209-2321/PR 500 ft pull box	209-2315/PR 500 ft pull box	209-2316/PR 500 ft pull box		
		209-2322 1000 ft spool	209-2323 1000 ft spool	209-2317 1000 ft spool	209-2318 1000 ft spool	209-2327 1000 ft pull box	
				209-2317/PR 1000 ft spool	209-2318/PR 1000 ft spool		
		105 strand					
		209-2325 500 ft pull box	209-2326 500 ft pull box				
			209-2326/WS/ WH 500 ft spool				

SHIELDED

14/2	14/4	16/2	16/4
105 strand		65 strand	
209-2347/S/5WH 500 ft pull box	209-2351/S/5WH 500 ft pull box	209-2355/S/5WH 500 ft pull box	209-2359/S/5WH 500 ft pull box


DIRECT BURIAL

12/2	12/4	14/2	14/4	16/2	16/4	18/2	18/4
65 strand		105 strand		65 strand		16 strand	
209-2324/DB 500 ft spool	209-2319/DB 500 ft spool	209-2320/DB 500 ft pull box	209-2321/DB 500 ft spool	209-2315/DB 500 ft pull box	209-2316/DB 500 ft pull box	209-2328/DB 500 ft pull box	209-2329/DB 500 ft pull box





UNSHIELDED

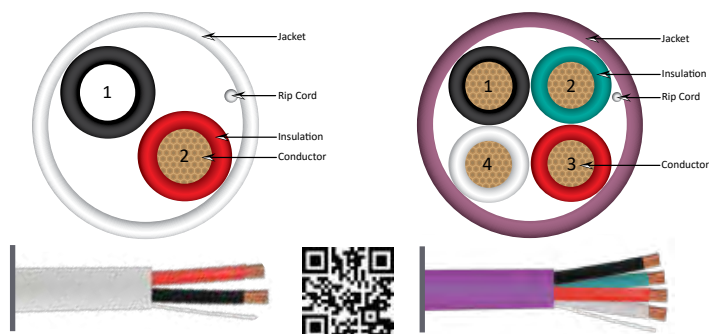

Features:


- Conductors: Oxygen-Free Stranded Bare Copper
- Stranded Conductors Provide Additional Flexibility
- Insulation Material: PVC
- Flame Retardant Test: CMR CL3
- ETL-listed, RoHS-Compliant
- Available in a Wooden Spool or Pull Box

Direct Burial Features:


- Durable Weather Resistant Jacket
- High-Strand Oxygen Free Bare Copper Conductors
- Suitable for Direct Burial Applications
- UV Rated Outer Jacket
- Water Block Tape



SHIELDED

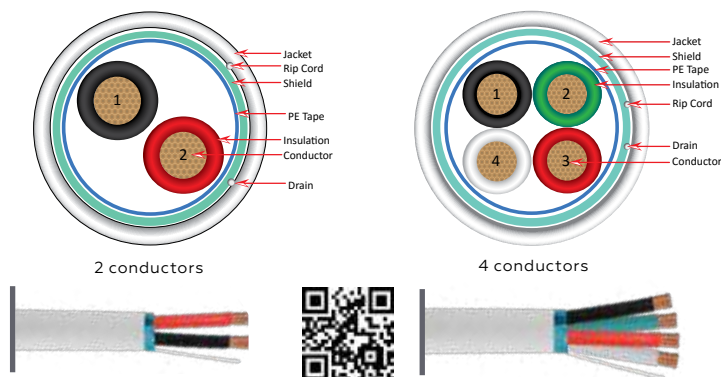


DIRECT BURIAL

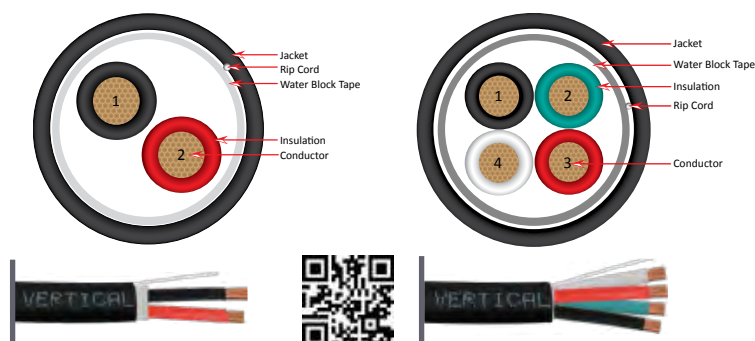

Coaxial Cable

Coaxial Cable		
	Standard	Quad
RG6	Bare Copper Conductor	
	ETL 107-2312/WH (CM) 107-2311/BK (CM) 107-2311/BK/RB (CM)	ETL 107-2309/BK (CM) 107-2310/WH (CM)
	Copper-Clad Steel (CCS) Conductors	
	ETL 107-1956BK6SR (CMR) 107-1957WH6SR (CMR) 107-1234BK6S1BX (CM) 107-1237WH6S1BX (CM) 107-1234BK6S1RB (CM) 107-1237WH6S1RB (CM) 107-1235BK6S500 (CM) 107-1236WH6S500 (CM)	ETL 107-1952BK6Q1BX (CM) 107-1953WH6Q1BX (CM) 107-1954BK6Q500 (CM) 107-1955WH6Q500 (CM) 107-1952BK6Q1WS (CM)
	CCS with Messenger	
	ETL 107-1233BK/MESG (CM)	-
RG59	Copper-Clad Steel (CCS) with Plenum Jacket	
	ETL 107-2316/P/WH (CMP) 107-2316/P/BK (CMP)	ETL 107-2315/P/WH (CMP) 107-2315/P/BK (CMP)
	Copper-Clad Steel (CCS) Direct Burial (Gel-Flooded Core)	
	ETL 107-1234/DB/6S	ETL 107-1952/DB/6Q
	95% Copper Clad Aluminum (CCA) Siamese with 18/2 Power Cables	
	ETL 107-2179/BK (CM)	
RG11	85% Copper Clad Aluminum (CCA) Siamese with 18/2 Power Cables	
	ETL 107-2321/BK (CM) 107-2322/WH (CM) 107-2323/BK (CM) 107-2324/WH (CM)	
	Copper-Clad Steel (CCS) Conductors	
	ETL 107-1032BK/R11 (CM)	ETL 107-1032BK/R11Q (CM)
	Copper-Clad Steel (CCS) Direct Burial	
	ETL 107-1032DB/R11	ETL 107-1032DB/R11Q

RG6 CMP Plenum Quad Shield - CCS

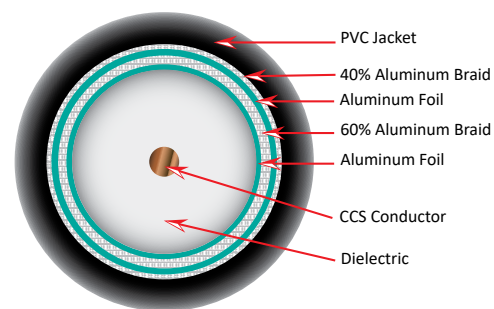

Features:


- High-Grade RG6 Coaxial Cable
- Suitable for Digital HDTV Applications, CATV
- 18 AWG Solid CCS Conductor
- Shield: Aluminum Foil, 60% Aluminum Braid, Aluminum Foil, 40% Aluminum Braid
- CMP-Rated
- ETL-listed, RoHS-Compliant
- 1000 ft Wooden Spool

Item #	Description
107-2315/P/BK	1000 ft Spool, Black
107-2315/P/WH	1000 ft Spool, White



3G Sweep Tested - Explained
Engineered for high-performance video and data transmission, each cable is 3G sweep tested to ensure consistent signal quality across the required frequency range. Perfect for HDTV, CCTV, and broadband applications

RG6 CM Quad Shield - Bare Copper

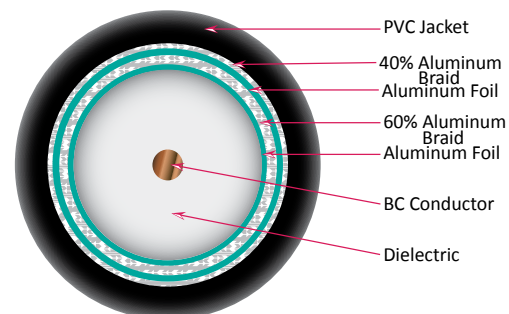


Features:

- High-Grade RG6 Coaxial Cable
- Suitable for Digital HDTV Applications, CATV and Digital Satellite Installations
- 18 AWG Solid Bare Copper Conductor
- Shield: Aluminum Foil, 60% Aluminum Braid, Aluminum Foil, 40% Aluminum Braid
- Fully Sweep Tested to 3.0 GHz
- CM, CATV, CL2
- ETL-listed, RoHS-Compliant

Item #	Description
107-2309/BK	Solid Bare Copper Conductor, 1000 ft, Pull Box, Black
107-2310/WH	Solid Bare Copper Conductor, 1000 ft, Pull Box, White

Coaxial Cable >> RG6

RG6 CM Quad Shield - CCS

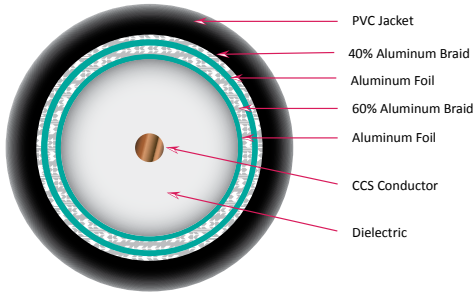

Features:

- High-Grade RG6 Quad Shield
- Suitable for Digital HDTV applications, CATV, TV antenna and Satellite TV
- 18 AWG Copper Clad Steel Conductor
- Shield: Aluminum Foil, 60% Aluminum Braid, Aluminum Foil, 40% Aluminum Braid
- Sweep Tested to 3.0 GHz
- CM, CL2 Rated
- ETL-listed, RoHS-Compliant



Item #	Description
107-1954BK6Q500	500 ft Pull Box, Black
107-1955WH6Q500	500 ft Pull Box, White
107-1952BK6Q1BX	1000 ft Pull Box, Black
107-1953WH6Q1BX	1000 ft Pull Box, White

Related products:



[078-1018](#)

[P80](#)



[037-319WH/3G](#)


[P77](#)



[083-1042/CP/Q](#)

[P77](#)

RG6 CMP Plenum Standard Shield - CCS

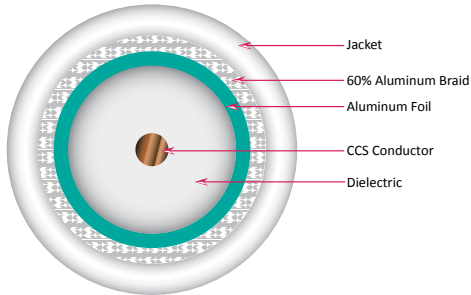


Features:

- High-Grade RG6 Coaxial Cable
- Suitable for Digital HDTV Applications, CATV
- 18 AWG Solid CCS Conductor
- Shield: Aluminum Foil, 60% Aluminum Braid
- CMP-Rated (Plenum)
- ETL-listed, RoHS-Compliant
- 1000 ft Wooden Spool



Item #	Description
107-2316/P/BK	1000 ft Spool, Black
107-2316/P/WH	1000 ft Spool, White

RG6 CM Standard Shield - Bare Copper

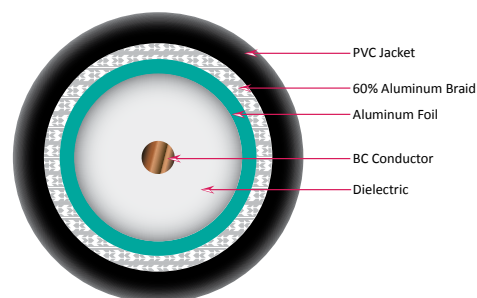

Features:

- High-Grade RG6 Coaxial Cable Suitable for Digital HDTV Applications, CATV and Digital Satellite Installations
- 18 AWG Solid Bare Copper Conductor
- Shield: Aluminum Foil, 60% Aluminum Braid
- Fully Sweep Tested to 3.0 GHz
- CM, CATV, CL2
- ETL-listed, RoHS-Compliant


Item

Description

107-2311/BK	Solid Bare Copper Conductor, 1000 ft, Pull Box, Black
107-2311/BK/RB	Solid Bare Copper Conductor, 1000 ft, Reel-in-Box, Black
107-2312/WH	Solid Bare Copper Conductor, 1000 ft, Pull Box, White



RG6 CM & CMR Standard Shield - CCS

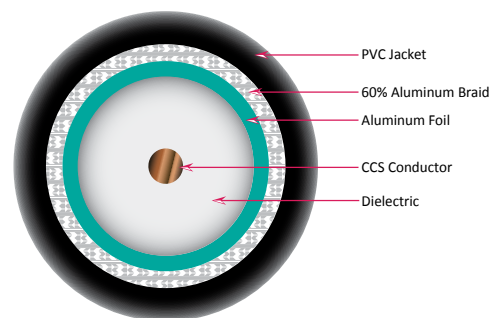

Features:

- High-Grade RG6 Coaxial Cable Suitable for Digital HDTV Applications, CATV and Digital Satellite Installations
- 18 AWG Solid Copper-Clad Steel Conductor
- Shield: Aluminum Foil, 60% Aluminum Braid
- Fully Sweep Tested to 3.0 GHz
- CM & CMR, CATV, CL2
- ETL-listed, RoHS-Compliant



Item

Description

107-1235BK6S500	CCS Conductor, 500 ft Pull Box, Black - CM
107-1236WH6S500	CCS Conductor, 500 ft Pull Box, White - CM
107-1234BK6S1BX	CCS Conductor, 1000 ft Pull Box, Black - CM
107-1237WH6S1BX	CCS Conductor, 1000 ft Pull Box, White - CM
107-1234BK6S1RB	CCS Conductor, 1000 ft, Reel-in-Box, Black - CM
107-1237WH6S1RB	CCS Conductor, 1000 ft, Reel-in-Box, White - CM
107-1956BK6SR	CCS Conductor, 1000 ft Pull Box, Black - CMR
107-1957WH6SR	CCS Conductor, 1000 ft Pull Box, White - CMR

Coaxial Cable » RG6

RG6 Quad & Standard Shield Direct Burial - CCS

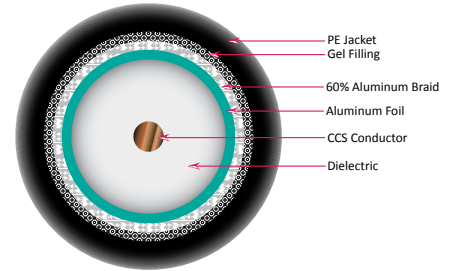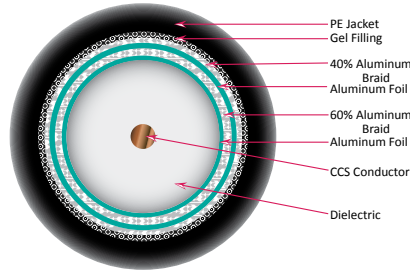


Features:

- High-Grade RG6 Quad Shield Direct Burial Cable
- 18 AWG Copper-Clad Steel (CCS) Conductor
- Quad Shield: Aluminum Foil + 60% Braid + Aluminum Foil + 40% Braid
- 75 Ohm Impedance
- Durable Polyethylene (PE) Jacket
- Gel-Filled Core for Direct Burial Applications
- ETL-Verified, RoHS-Compliant
- 1000 ft Spool



Item #	Description
107-1952/DB/6Q	RG6, Direct Burial, CCS Conductor, Quad Shield: Aluminum Foil, 60% Aluminum Braid, Aluminum Foil, 40% Aluminum Braid, Gel-Coated, 18 AWG, 3.0 GHz, 1000 ft Spool, Black
107-1234/DB/6S	RG6, Direct Burial, CCS Conductor, Dual Shield: Aluminum Foil, 60% Aluminum Braid, Gel Filling, 18 AWG, 3.0 GHz, 1000 ft Spool, Black

RG6 Standard Shield With Messenger - CCS

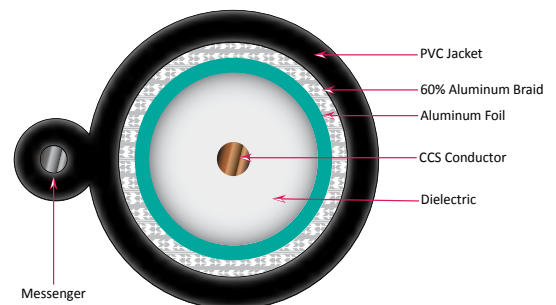

Features:

- High-Grade RG6 Coaxial Cable with Messenger for Aerial Installations
- 18 AWG Copper-Clad Steel (CCS) Center Conductor
- Dual Shield: Aluminum Foil + 60% Aluminum Braid
- 75 Ohm Impedance
- PVC Jacket, CM Rated, UV-Resistant
- CATV / CL2 Rated
- ETL-Listed, RoHS-Compliant


Item #	Description
107-1233BK/MESG	RG6, with messenger, CCS Conductor, Dual Shield: Aluminum Foil, 60% Aluminum Braid, 18 AWG, 1000 ft Spool, Black



048-301/TC

P116

RG59 Siamese Cable 95% CCA Braid

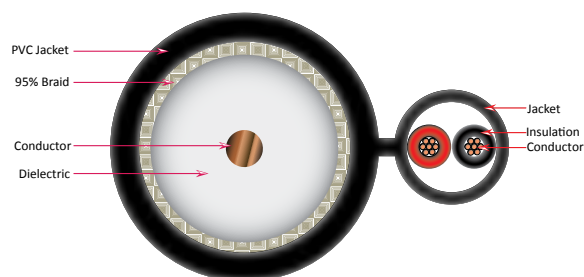


Features:

- Siamese RG59 Coaxial Cable with Integrated Power
- 20 AWG Solid Bare Copper Center Conductor
- 95% CCA Braid for Enhanced Signal Protection
- 18 AWG Stranded Power Conductors
- CM Rated Jacket for Indoor Installations
- Optimized for CCTV and Security Applications
- ETL-Listed, RoHS-Compliant
- Available in 1000 ft

Item #	Description
107-2179/BK	RG59 Siamese, + 18 AWG Power Cables, Shield: 95% CCA Braid, 20 AWG, 1000 ft Spool, Black

RG59 Siamese Cable 85% CCA Braid with 18/2 Power Cable


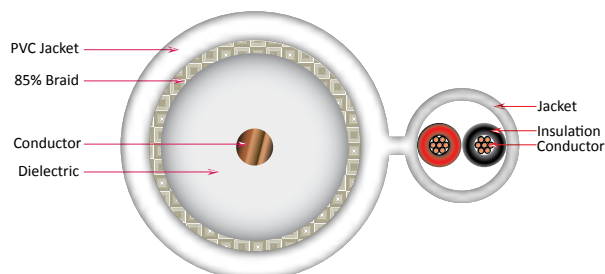


Features:

- Siamese RG59 Coaxial Cable with 18 AWG Stranded Power Conductors
- Optimized for CCTV Video and Power Transmission
- 20 AWG Copper-Clad Steel (CCS) Center Conductor
- 85% CCA Braid Coverage for Signal Protection
- CM Rated Jacket, CL2 Rated Cable
- ETL-Verified, RoHS-Compliant
- Available in 1000 ft Wooden Spool and 500 ft Reel-in-Box

Item #	Description
107-2321/BK	1000 ft, Spool, Black
107-2322/WH	1000 ft, Spool, White
107-2323/BK	500 ft, Reel-in-Box, Black
107-2324/WH	500 ft, Reel-in-Box, White

RG11 Quad Shield & Standard Shield - CCS Conductor

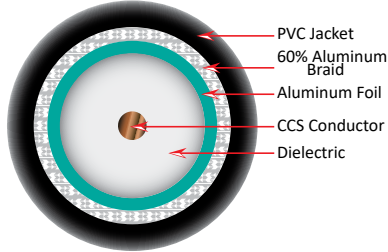
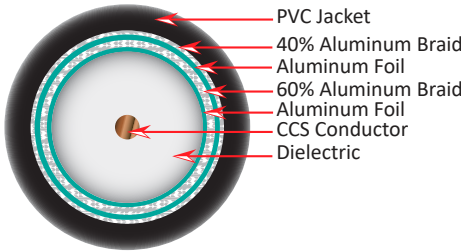


Features:

- High-Grade RG11 Quad Shield
- 14 AWG CCS Solid Conductor
- Shield: Aluminum Foil, 60% Aluminum Braid, Aluminum Foil, 40% Aluminum Braid
- 75 Ohm Impedance
- ETL-listed, RoHS-Compliant
- Supplied in 1000 ft Spool

Item #	Description
107-1032BK/R11Q	RG11, CCS Conductor, Quad Shield: Aluminum Foil, 60% Aluminum Braid, Aluminum Foil, 40% Aluminum Braid, 14 AWG, CL2, CM, PVC Jacket, 1000 ft Spool, Black
107-1032BK/R11	RG11, CCS Conductor, Shield: Aluminum Foil, 60% Aluminum Braid, 14 AWG, CL2 Rated, 1000 ft Spool, Black

RG11 Quad Shield & Standard Shield - CCS Direct Burial

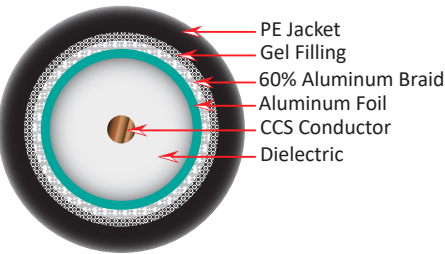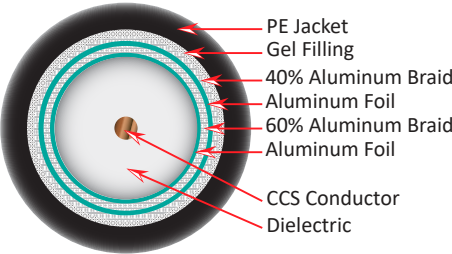

Features:

- High-Grade RG11 Direct Burial
- 14 AWG CCS Solid Conductor
- Shield: Aluminum Foil, 60% Aluminum Braid, Aluminum Foil, 40% Aluminum Braid
- Direct Burial Gel Filled
- 75 Ohm Impedance
- ETL-Verified, RoHS-Compliant

Item #	Description
107-1032/DB/R11Q	RG11 Direct Burial, CCS Conductor, Quad Shield: Aluminum Foil, 60% Braid, Aluminum Foil, 40% Aluminum Braid, Gel Filled, 14 AWG, PE Jacket, 1000 ft Spool, Black
107-1032/DB/R11	RG11 Direct Burial, CCS Conductor, Dual Shield: Aluminum Foil, 60% Braid, Gel Filled, 14 AWG, CL2, PE Jacket, 1000 ft Spool, Black

WHY VERTICAL CABLE?



FOUR U.S. DISTRIBUTION CENTERS

Strategically located to deliver where and when you need it.



MANUFACTURING PLANT

Proudly manufacturing quality products in the United States.



SAME-DAY SHIPPING

Orders ship the same day—because your time matters.



FIVE-STAR CUSTOMER SUPPORT

Real people. Real answers. Real solutions.



PROVEN, HIGH-PERFORMANCE PRODUCTS

Engineered for reliability. Built to perform.

STANDARDS YOU CAN TRUST

MADE IN THE USA
(SELECT PRODUCTS)



TAA
COMPLIANT



ROHS
COMPLIANT



ETL
LISTED




Intertek

INDUSTRY PARTNERSHIPS



Access Control Cable

22/3 Pair (Shielded) + 18/4 + 22/4 + 22/2

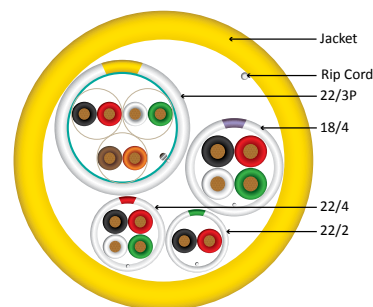

Features:

- 4 Component Lighting Control Cable
- Each component contains a rip cord
- ETL-listed, RoHS Compliant
- 500 ft Spool and 1000 ft Wooden Spool

Components:


22 AWG / 3 Pair Shielded
18 AWG / 4 Conductor,
22 AWG / 4 Conductor,
22 AWG / 2 Conductor

Applications:

Access Control Panels, Security Panels,
Card Readers, Sensors, Keypads, Power,
Microphones, Speakers, Alarm Systems

Item #	Description
214-2325/GR	22/3P Shielded + 18/4 + 22/4 + 22/2 Lighting Control Cable Riser-Rated , 500 ft, Green, Spool
214-2329/P/WH	22/3P Shielded + 18/4 + 22/4 + 22/2 Lighting Control Cable Plenum-Rated , 500 ft, White, Spool
214-2330/P/YL	22/3P Shielded + 18/4 + 22/4 + 22/2 Lighting Control Cable Plenum-Rated , 500 ft, Yellow, Spool
214-2333/P/YL1K	22/3P Shielded + 18/4 + 22/4 + 22/2 Lighting Control Cable Plenum-Rated , 1000 ft, Yellow, Spool
214-2334/P/BK1K	22/3P Shielded + 18/4 + 22/4 + 22/2 Lighting Control Cable Plenum-Rated , 1000 ft, Black, Spool
214-2342/P/WH1K	22/3P Shielded + 18/4 + 22/4 + 22/2 Lighting Control Cable Plenum-Rated , 1000 ft, White, Spool
214-2331/PBX/YL	22/3P Shielded + 18/4 + 22/4 + 22/2 Lighting Control Cable Plenum-Rated , 500 ft, Yellow, Reel in box

OSDP Cable CMP Plenum-Rated

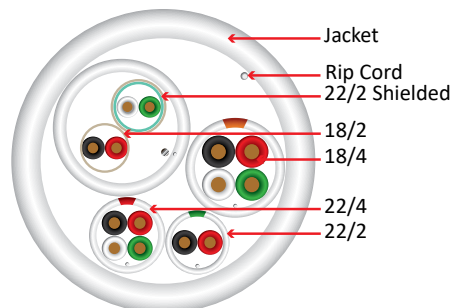


Features:

- CMP plenum-rated OSDP cable
- EMI/RFI Protection (Shielded Pair Only)
- Easy-strip rip cord
- ETL-listed, RoHS Compliant
- 1000 ft Wooden Spool

Item #	Description
214-2363/P/WH1K	22 AWG 1 Pair Shielded + 18/2, 18/4, 22/4, 22/2 OSDP Cable, Plenum-Rated, 1000 ft, White , Spool
214-2364/P/YL1K	22 AWG 1 Pair Shielded + 18/2, 18/4, 22/4, 22/2 OSDP Cable, Plenum-Rated, 1000 ft, Yellow , Spool

Control Cable: 22/2 (Shielded) + 18/2

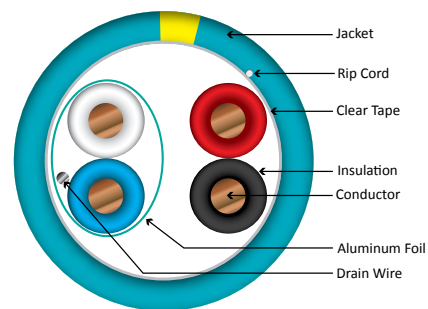

Features:

- Control Cable
- Riser-Rated CL3R & Plenum-Rated CL3P
- ETL-listed, RoHS-Compliant
- 1000 ft Spool

Applications:

Touch Panels, Key Pads, Expansion Modules, Tuners, Power Limited Control Circuits, Access Control Panels, Security Panels, Card Readers, Sensors, Keypads, Power, Microphones, Speakers, Alarm Systems


Item

Description

214-2321/TL 22/2 Shielded + 18/2 Stranded Bare Copper Conductors, **CL3R Riser-Rated**, 1000 ft, Wooden Spool, Teal with Yellow Stripe

214-2320/P/TL 22/2 Shielded + 18/2 Stranded Bare Copper Conductors, **CL3P Plenum-Rated**, 1000 ft, Wooden Spool, Teal with Yellow Stripe

Control Cable: 22/2 (Shielded) + 16/2

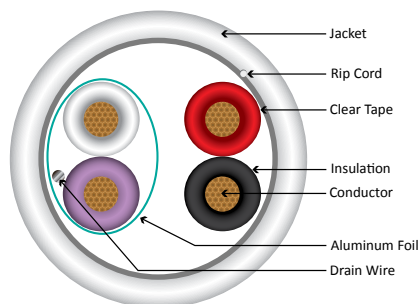

Features:

- High Grade Lighting Control System Cable
- In-home, commercial, and industrial lighting applications
- Used in conjunction with security & sensor systems
- Indoor Applications
- Riser-Rated CL3R & Plenum-Rated CL3P
- ETL-listed, RoHS-Compliant
- 1000 ft Spool

Applications:

High Grade Lighting Control System Cable In-home, commercial, and industrial lighting applications. Used in conjunction with security & sensor systems Indoor Applications, Light Dimmers, environmental sensors, smart eco-friendly lighting control

Item

Description

214-2323/WH 22/2 Shielded + 16/2 Stranded Bare Copper Conductors, **CL3R Riser-Rated** 1000 ft, Wooden Spool, White

214-2332/P/WH 22/2 Shielded + 16/2 Stranded Bare Copper Conductors, **CL3P Plenum-Rated** 1000 ft, Wooden Spool, White

Security Cable

SECURITY CABLE - **PLENUM-RATED**

UNSHIELDED - STRANDED CONDUCTORS						
12/2	12/4	14/2	14/4	16/2	16/4	18/2
19 strand		19 strand		19 strand		7 strand
211-122/P/5WH 500 ft spool	211-124/P/5WH 500 ft spool	211-142/P/WH 1000 ft pull box 211-142/P/5WH 500 ft pull box	211-144/P/WH 1000 ft spool 211-144/P/5WH 500 ft pull box	211-162/P/WH 1000 ft pull box 211-162/P/5WH 211-162/P/5BK 500 ft pull box	211-164/P/WH 1000 ft pull box 211-164/P/5WH 211-164/P/5BK 500 ft pull box	211-182/P/WH 1000 ft pull box 211-182/P/5WH 500 ft pull box
SHIELDED - STRANDED						
				16/2	16/4	18/2
				19 strand		7 strand
				211-162/S/P/WH 1000 ft pull box 211-162/S/P/5WH 500 ft pull box	211-164/S/P/WH 1000 ft spool 211-164/S/P/5WH 500 ft pull box	211-182/S/P/WH 1000 ft pull box 211-182/S/P/5WH 500 ft pull box

SECURITY CABLE - **NON-PLENUM**

UNSHIELDED - STRANDED CONDUCTORS			
18/2	18/4	18/6	18/8
19 strand			7 strand
211-182ST/WH 1000 ft pull box 211-182ST/5WH 211-182ST/5GY 500 ft pull box	211-184ST/WH 1000 ft pull box 211-184ST/5WH 211-184ST/5GY 500 ft pull box	211-186ST/GY 1000 ft spool 211-186ST/5GY 500 ft spool	211-188ST/GY 1000 ft spool
SHIELDED - STRANDED			
18/2	18/4	18/6	18/8
19 strand			7 strand
211-182ST/S/WH 1000 ft pull box 211-182ST/S/5WH 500 ft pull box	211-184ST/S/WH 1000 ft spool 211-184ST/S/5GY 500 ft pull box	211-186ST/S/GY 1000 ft spool 211-186ST/S/5GY 500 ft spool	211-188ST/S/GY 1000 ft spool

SECURITY CABLE - **DIRECT BURIAL**

SHIELDED - STRANDED CONDUCTORS					
18/2	18/4	18/6	18/8	22/4	22/6
16 strand				7 strand	
211-182ST/S/DB 1000 ft spool	211-184ST/S/DB 1000 ft spool	211-186ST/S/DB 1000 ft spool	211-188ST/S/5DB 500 ft spool	210-224ST/S/5DB 500 ft box	210-226ST/S/5DB 500 ft box
UNSHIELDED - STRANDED					
				22/4	
				210-224ST/DB 500 ft box	



SECURITY CABLE - PLENUM-RATED

UNSHIELDED - STRANDED CONDUCTORS

18/4	18/6	22/2	22/4	22/6	22/8
19 strand	7 strand	7 strand			
211-184/P/WH 1000 ft pull box 211-184/P/5WH 500 ft pull box	211-186ST/P/WH 1000 ft spool	210-222/P/WH 1000 ft pull box	210-224/P/WH 1000 ft pull box	210-226/P/WH 1000 ft spool	210-228/P/WH 1000 ft spool

SHIELDED - STRANDED

18/4	18/6	22/4	22/6
19 strand	7 strand	7 strand	
211-184/S/P/5WH 500 ft pull box	211-186/S/P/5WH 500 ft spool	210-224/S/P/WH 1000 ft spool	210-226/S/P/WH 1000 ft spool

SECURITY CABLE - NON-PLENUM

UNSHIELDED - STRANDED CONDUCTORS

UNSHIELDED - SOLID CONDUCTORS

22/2	22/4	22/6	22/8	22/2	22/4
7 strand				SOLID CONDUCTOR	
210-222ST/GY 210-222ST/WH 1000 ft pull box 210-222ST/5GY 210-222ST/5WH 500 ft pull box 212-222ST/5WH 212-222ST/5BL 500 ft coil pack	210-224ST/GY 210-224ST/WH 1000 ft pull box 210-224ST/5GY 210-224ST/5WH 500 ft pull box 212-224ST/5GY 212-224ST/5WH 500 ft coil pack	210-226ST/GY 210-226ST/WH 1000 ft pull box 210-226ST/5GY 210-226ST/5WH 500 ft pull box	210-228ST/GY 1000 ft pull box 210-228ST/5GY 500 ft pull box	210-222SO/GY 210-222SO/WH 1000 ft pull box 212-222SO/5GY 212-222SO/5WH 500 ft coil pack	210-224SO/WH 1000 ft pull box 212-224SO/5WH 212-224SO/5GY 500 ft coil pack

SHIELDED - STRANDED


SHIELDED - SOLID

22/2	22/4	22/6	22/8	22/2	22/4
7 strand				SOLID CONDUCTOR	
210-222ST/S/GY 1000 ft pull box 210-222ST/S/5GY 210-222ST/S/5WH 500 ft pull box	210-224/S/WH 1000 ft pull box 210-224ST/S/5GY 210-224ST/S/5WH 500 ft pull box	210-226ST/S/WH 210-226ST/S/GY 1000 ft pull box 210-226ST/S/5GY 210-226ST/S/5WH 500 ft pull box	210-228ST/S/GY 1000 ft pull box 210-228ST/S/5GY 500 ft pull box	210-222SO/S/5WH 500 ft pull box	210-224SO/S/WH 1000 ft pull box 210-224SO/S/5GY 500 ft pull box




STRANDED CONDUCTORS

UNSHIELDED

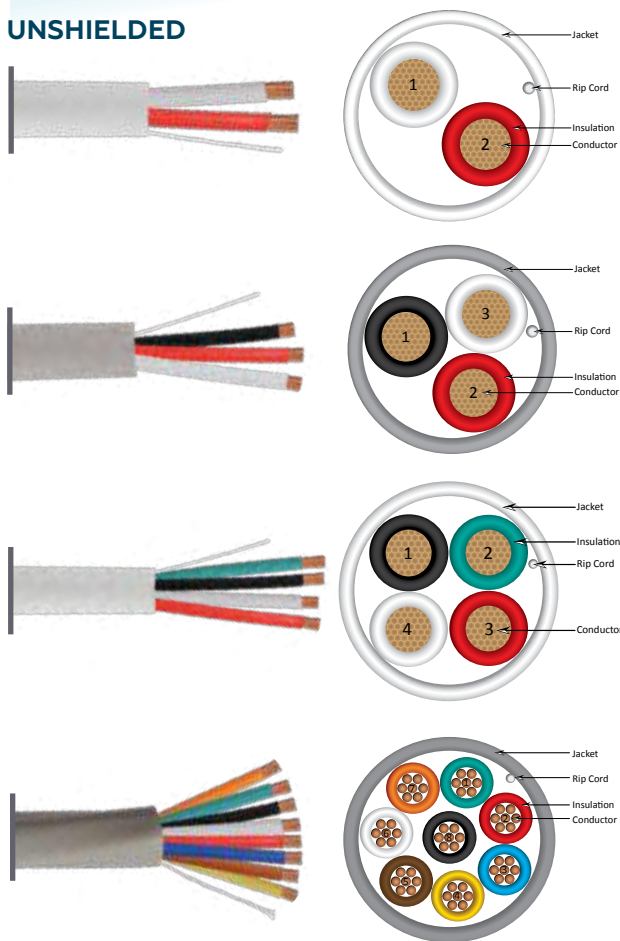

SHIELDED

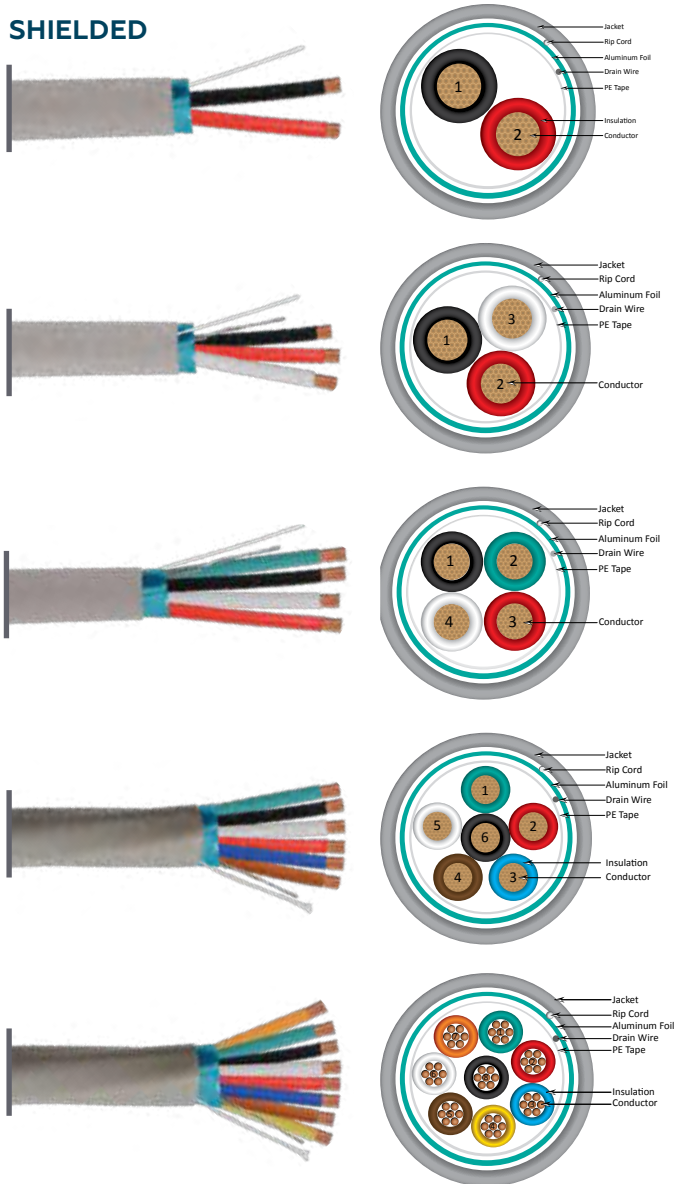

Features:

- Conductor: Stranded Bare Copper and Solid Bare Copper
- Non-Plenum: CM CL2
- Plenum-Rated: CMP CL3P
- Sequential Length Markings on Jacket
- 500 ft or 1000 ft (Pull Box, Spool or Coil Pack)
- ETL-listed, RoHS-Compliant


Applications:

- Indoor Remote Control of Security
- Intercom Systems
- Sound / Audio Systems
- Door Controllers, Prox Sensors, Key Pads, Access Control, Smoke Detectors
- Indoor Applications




SOLID CONDUCTORS


UNSHIELDED

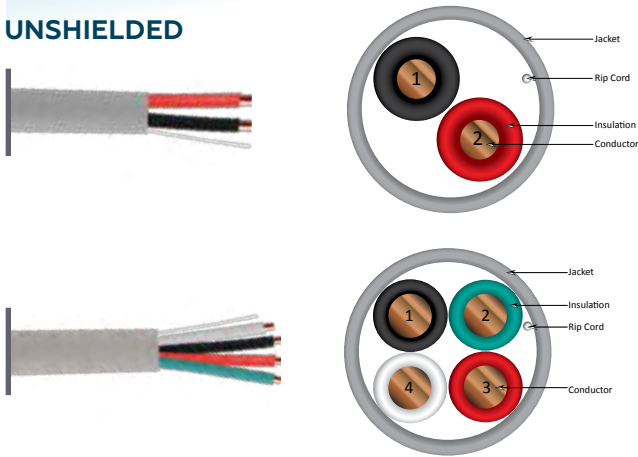

SHIELDED

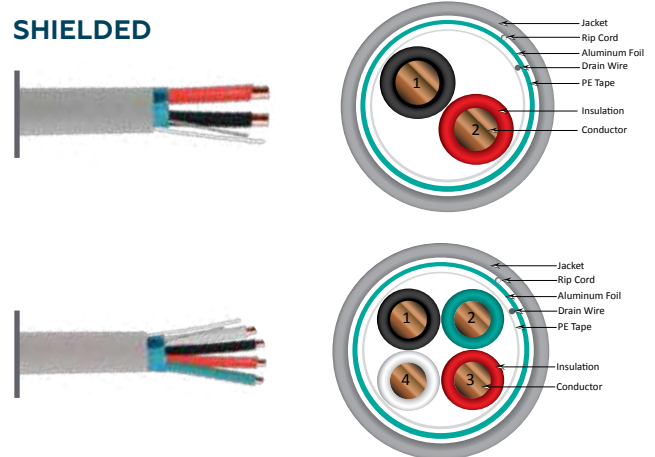

DIRECT BURIAL

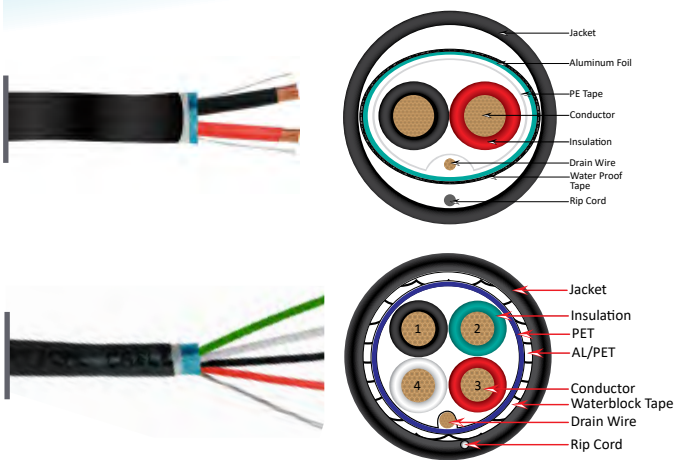

Packaging Options Available



Fire Alarm Cable

FPLP, Plenum-Rated

UNSHIELDED


Item #	Description
216-122/P/RD	12/2 Alarm Cable, FPLP, Unshielded, Solid Bare Copper Conductors, 1000 ft, Spool, Red
216-142/P/BK	14/2 Alarm Cable, FPLP, Unshielded, Solid Bare Copper Conductors, 1000 ft, Spool, Blue
216-142/P/BL	14/2 Alarm Cable, FPLP, Unshielded, Solid Bare Copper Conductors, 1000 ft, Spool, Blue
216-142/P/GR	14/2 Alarm Cable, FPLP, Unshielded, Solid Bare Copper Conductors, 1000 ft, Spool, Green
216-142/P/OR	14/2 Alarm Cable, FPLP, Unshielded, Solid Bare Copper Conductors, 1000 ft, Spool, Orange
216-142/P/RD	14/2 Alarm Cable, FPLP, Unshielded, Solid Bare Copper Conductors, 1000 ft, Spool, Red
216-142/P/WH	14/2 Alarm Cable, FPLP, Unshielded, Solid Bare Copper Conductors, 1000 ft, Spool, White
216-142/P/YL	14/2 Alarm Cable, FPLP, Unshielded, Solid Bare Copper Conductors, 1000 ft, Spool, Yellow
216-144/P/RD	14/4 Alarm Cable, FPLP, Unshielded, Solid Bare Copper Conductors, 1000 ft, Spool, Red
216-162/P/BK	16/2 Alarm Cable, FPLP, Unshielded, Solid Bare Copper Conductors, 1000 ft, Spool, Blue
216-162/P/BL	16/2 Alarm Cable, FPLP, Unshielded, Solid Bare Copper Conductors, 1000 ft, Spool, Blue
216-162/P/OR	16/2 Alarm Cable, FPLP, Unshielded, Solid Bare Copper Conductors, 1000 ft, Spool, Orange
216-162/P/RD	16/2 Alarm Cable, FPLP, Unshielded, Solid Bare Copper Conductors, 1000 ft, Spool, Red
216-162/P/WH	16/2 Alarm Cable, FPLP, Unshielded, Solid Bare Copper Conductors, 1000 ft, Spool, White
216-162/P/YL	16/2 Alarm Cable, FPLP, Unshielded, Solid Bare Copper Conductors, 1000 ft, Spool, Yellow
216-164/P/RD	16/4 Alarm Cable, FPLP, Unshielded, Solid Bare Copper Conductors, 1000 ft, Spool, Red
216-182/P/BL	18/2 Alarm Cable, FPLP, Unshielded, Solid Bare Copper Conductors, 1000 ft, Spool, Blue
216-182/P/GR	18/2 Alarm Cable, FPLP, Unshielded, Solid Bare Copper Conductors, 1000 ft, Spool, Green
216-182/P/RD	18/2 Alarm Cable, FPLP, Unshielded, Solid Bare Copper Conductors, 1000 ft, Spool, Red
216-182/P/WH	18/2 Alarm Cable, FPLP, Unshielded, Solid Bare Copper Conductors, 1000 ft, Spool, White
216-182/P/YL	18/2 Alarm Cable, FPLP, Unshielded, Solid Bare Copper Conductors, 1000 ft, Spool, Yellow
216-184/P/BL	18/4 Alarm Cable, FPLP, Unshielded, Solid Bare Copper Conductors, 1000 ft, Spool, Blue
216-184/P/RD	18/4 Alarm Cable, FPLP, Unshielded, Solid Bare Copper Conductors, 1000 ft, Spool, Red
216-184/P/YL	18/4 Alarm Cable, FPLP, Unshielded, Solid Bare Copper Conductors, 1000 ft, Spool, Yellow

SHIELDED


Item #	Description
216-122/S/P/RD	12/2 Alarm Cable, FPLP, Shielded, Solid Bare Copper Conductors, 1000 ft, Spool, Red
216-142/S/P/BL	14/2 Alarm Cable, FPLP, Shielded, Solid Bare Copper Conductors, 1000 ft, Spool, Blue
216-142/S/P/GR	14/2 Alarm Cable, FPLP, Shielded, Solid Bare Copper Conductors, 1000 ft, Spool, Green
216-142/S/P/OR	14/2 Alarm Cable, FPLP, Shielded, Solid Bare Copper Conductors, 1000 ft, Spool, Orange
216-142/S/P/RD	14/2 Alarm Cable, FPLP, Shielded, Solid Bare Copper Conductors, 1000 ft, Spool, Red
216-142/S/P/WH	14/2 Alarm Cable, FPLP, Shielded, Solid Bare Copper Conductors, 1000 ft, Spool, White
216-142/S/P/YL	14/2 Alarm Cable, FPLP, Shielded, Solid Bare Copper Conductors, 1000 ft, Spool, Yellow
216-162/S/P/BL	16/2 Alarm Cable, FPLP, Shielded, Solid Bare Copper Conductors, 1000 ft, Spool, Blue
216-162/S/P/GR	16/2 Alarm Cable, FPLP, Shielded, Solid Bare Copper Conductors, 1000 ft, Spool, Green
216-162/S/P/RD	16/2 Alarm Cable, FPLP, Shielded, Solid Bare Copper Conductors, 1000 ft, Spool, Red
216-162/S/P/WH	16/2 Alarm Cable, FPLP, Shielded, Solid Bare Copper Conductors, 1000 ft, Spool, White
216-162/S/P/YL	16/2 Alarm Cable, FPLP, Shielded, Solid Bare Copper Conductors, 1000 ft, Spool, Yellow
216-164/S/P/RD	16/4 Alarm Cable, FPLP, Shielded, Solid Bare Copper Conductors, 1000 ft, Spool, Red
216-182/S/P/BL	18/2 Alarm Cable, FPLP, Shielded, Solid Bare Copper Conductors, 1000 ft, Spool, Blue
216-182/S/P/RD	18/2 Alarm Cable, FPLP, Shielded, Solid Bare Copper Conductors, 1000 ft, Spool, Red
216-182/S/P/YL	18/2 Alarm Cable, FPLP, Shielded, Solid Bare Copper Conductors, 1000 ft, Spool, Yellow
216-184/S/P/BL	18/4 Alarm Cable, FPLP, Shielded, Solid Bare Copper Conductors, 1000 ft, Spool, Blue
216-184/S/P/RD	18/4 Alarm Cable, FPLP, Shielded, Solid Bare Copper Conductors, 1000 ft, Spool, Red
216-184/S/P/YL	18/4 Alarm Cable, FPLP, Shielded, Solid Bare Copper Conductors, 1000 ft, Spool, Yellow



2 Conductor Unshielded

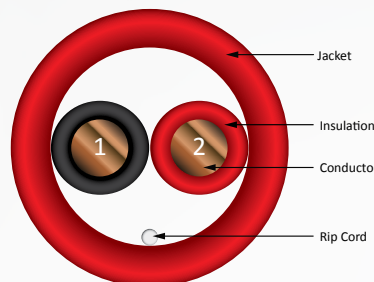

2 Conductor Shielded

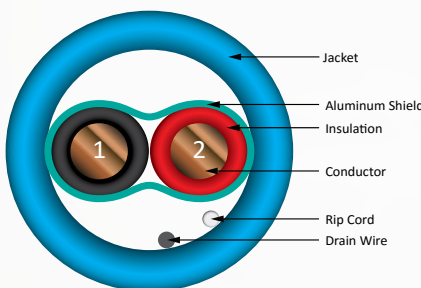


Fire Safety in Full Spectrum.


FPLR, Riser-Rated



**4 Conductor
Unshielded**

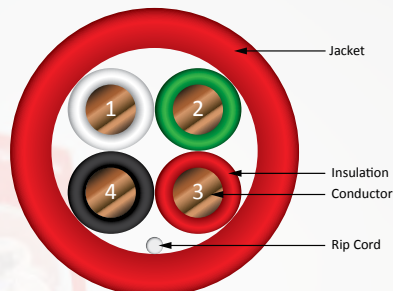

**4 Conductor
Shielded**

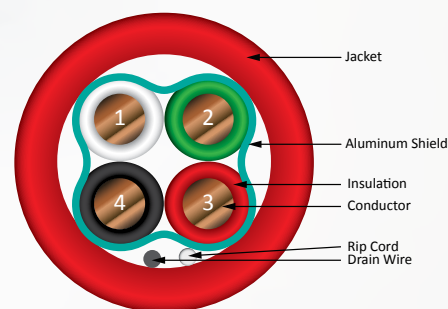

- **Seven colors**
- **FPLR & FPLP**
- **Shielded & Unshielded**
- **2, 14, 16, 18 AWG / 2, 4 Conductors**

Features:

- Fire protective signal circuit
- Solid Bare Copper Conductors
- ETL-listed, RoHS-Compliant

Applications: Smoke alarms and detectors, pull boxes, burglar alarms, addressable fire alarm systems

UNSHIELDED

Item #	Description
216-142/R/BL	14/2 Alarm Cable, FPLR, Unshielded, Solid Bare Copper Conductors, 1000 ft, Spool
216-142/R/RD	Colors: Blue, Red, Yellow
216-144/R/RD	14/4 Alarm Cable, FPLR, Unshielded, Solid Bare Copper Conductors, 1000 ft, Spool, Red
216-162/R/BL	16/2 Alarm Cable, FPLR, Unshielded, Solid Bare Copper Conductors, 1000 ft, Spool
216-162/R/RD	Colors: Blue, Red, Yellow
216-164/R/RD	16/4 Alarm Cable, FPLR, Unshielded, Solid Bare Copper Conductors, 1000 ft, Spool, Red
216-182/R/BL	18/2 Alarm Cable, FPLR, Unshielded, Solid Bare Copper Conductors, 1000 ft, Spool & Reel-in-Box
216-182/R/GR	Colors: Blue, Green, Red, Yellow
216-182/R/RD	
216-182/R/RB/RD	
216-182/R/YL	
216-184/R/BL	18/4 Alarm Cable, FPLR, Unshielded, Solid Bare Copper Conductors, 1000 ft, Spool
216-184/R/RD	Colors: Blue, Red, Yellow
216-184/R/YL	

SHIELDED

Item #	Description
216-142/S/R/BL	14/2 Alarm Cable, FPLR, Shielded, Solid Bare Copper Conductors, 1000 ft, Spool
216-142/S/R/GR	Colors: Blue, Green, Red, Yellow
216-142/S/R/RD	
216-142/S/R/YL	
216-162/S/R/BL	16/2 Alarm Cable, FPLR, Shielded, Solid Bare Copper Conductors, 1000 ft, Spool
216-162/S/R/RD	Colors: Blue, Red, Yellow
216-162/S/R/YL	
216-164/S/R/RD	16/4 Alarm Cable, FPLR, Shielded, Solid Bare Copper Conductors, 1000 ft, Spool, Red
216-182/S/R/BL	18/2 Alarm Cable, FPLR, Shielded, Solid Bare Copper Conductors, 1000 ft, Spool
216-182/S/R/RD	Colors: Blue, Red, Yellow
216-182/S/R/YL	
216-184/S/R/BL	18/4 Alarm Cable, FPLR, Shielded, Solid Bare Copper Conductors, 1000 ft, Spool
216-184/S/R/RD	Colors: Blue, Red, Yellow
216-184/S/R/YL	



Item #	Description
315-224/R/5RDCP	22/4 Alarm Cable, FPLR, Unshielded, Solid Bare Copper Conductors, 500 ft, Coil Pack, Red

Thermostat Wire

Thermostat Wire - CL2R & CL2P







Item #	Description
207-182/500BR	Thermostat wire 18/2, 500 FT, Brown, CL2R
207-182/500WH	Thermostat wire 18/2, 500 FT, White, CL2R
207-183/500BR	Thermostat wire 18/3, 500 FT, Brown, CL2R
207-183/500WH	Thermostat wire 18/3, 500 FT, White, CL2R
207-184/250BR	Thermostat wire 18/4, 250 FT, Brown, CL2R
207-184/250WH	Thermostat wire 18/4, 250 FT, White, CL2R
207-184/500BR	Thermostat wire 18/4, 500 FT, Brown, CL2R
207-185/250BR	Thermostat wire 18/5, 250 FT, Brown, CL2R
207-185/250WH	Thermostat wire 18/5, 250 FT, White, CL2R
207-185/500BR	Thermostat wire 18/5, 500 FT, Brown, CL2R
207-186/250BR	Thermostat wire 18/6, 250 FT, Brown, CL2R
207-186/250WH	Thermostat wire 18/6, 250 FT, White, CL2R
207-186/500BR	Thermostat wire 18/6, 500 FT, Brown, CL2R
207-186/P/250WH	Thermostat wire 18/6, 250 FT, White, CL2P
207-188/250BR	Thermostat wire 18/8, 250 FT, Brown, CL2R
207-188/250WH	Thermostat wire 18/8, 250 FT, White, CL2R
207-188/P/250WH	Thermostat wire 18/8, 250 FT, White, CL2P
207-202/500BR	Thermostat wire 20/2, 500 FT, Brown, CL2R
207-204/500BR	Thermostat wire 20/4, 500FT, Brown, CL2R

Features:

- Class 2 power-limited circuit cable for use in thermostat control applications
- 18-20 AWG, 2-8 Conductors
- CL2R and CL2P
- Heat and moisture resistant insulation
- ETL Verified, RoHS-Compliant



Applications:

- HVAC Systems
- Temperature Sensors
- Fire & Security Alarm Systems
- Building Automation



LED Cable

LED Cable - CL3 & Direct Burial

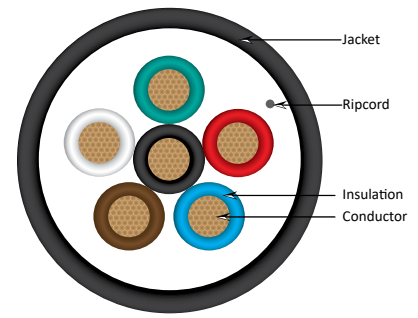

Features:


- **CL3 rated** for in-wall residential installations
- Stranded bare copper
- Durable PVC jacket for long-term performance
- **Direct burial** rated for underground installations
- Stranded bare copper
- Resistant to water, sunlight, and soil conditions

Item #	Description
213-146ST/5BK	LED Cable 14/6, 500 ft, Black, CL3 , 500 ft Spool
213-166ST/5BK	LED Cable 16/6, 500 ft, Black, CL3 , 500 ft Spool
213-146ST/DB/5BK	LED Cable 14/6, 500 ft, Black, Direct Burial , 500 ft Spool

Applications:

- Landscape and outdoor lighting
- Pathway and accent lighting
- Deck and patio lighting
- LED strip and architectural lighting
- Signage and display lighting
- Security and perimeter lighting

From homes to businesses, VC keeps you connected.

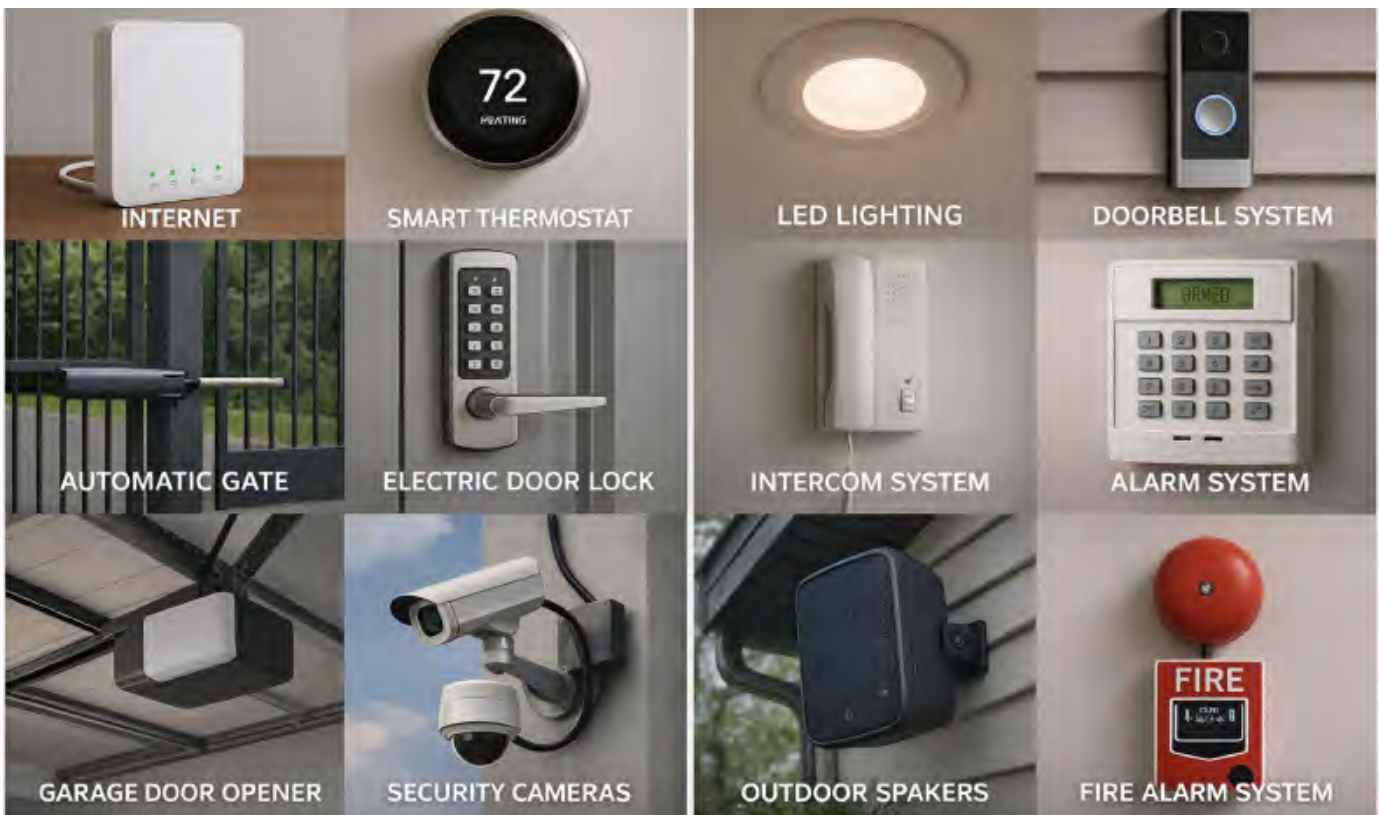

1A-A01 1A-A02 1A-A03 1A-A04 1A-A05 1A-A06 1A-A07 1A-A08 1A-A09 1A-A10 1A-A11 1A-A12 1A-A13 1A-A14 1A-A15 1A-A16 1A-A17 1A-A18 1A-A19 1A-A20 1A-A21 1A-A22 1A-A23 1A-A24

1A-B01 1A-B02 1A-B03 1A-B04 1A-B05 1A-B06 1A-B07 1A-B08 1A-B09 1A-B10 1A-B11 1A-B12 1A-B13 1A-B14 1A-B15 1A-B16 1A-B17 1A-B18 1A-B19 1A-B20 1A-B21 1A-B22 1A-B23 1A-B24

1A-C01 1A-C02 1A-C03 1A-C04 1A-C05 1A-C06 1A-C07 1A-C08 1A-C09 1A-C10 1A-C11 1A-C12 1A-C13 1A-C14 1A-C15 1A-C16 1A-C17 1A-C18 1A-C19 1A-C20 1A-C21 1A-C22 1A-C23 1A-C24

1A-D01 1A-D02 1A-D03 1A-D04 1A-D05 1A-D06 1A-D07 1A-D08 1A-D09 1A-D10 1A-D11 1A-D12 1A-D13 1A-D14 1A-D15 1A-D16 1A-D17 1A-D18 1A-D19 1A-D20 1A-D21 1A-D22 1A-D23 1A-D24

1A-D25 1A-D26 1A-D27 1A-D28 1A-D29 1A-D30 1A-D31 1A-D32 1A-D33 1A-D34 1A-D35 1A-D36 1A-D37 1A-D38 1A-D39 1A-D40 1A-D41 1A-D42 1A-D43 1A-D44 1A-D45 1A-D46 1A-D47 1A-D48

1A-E01 1A-E02 1A-E03 1A-E04 1A-E05 1A-E06 1A-E07 1A-E08 1A-E09 1A-E10 1A-E11 1A-E12 1A-E13 1A-E14 1A-E15 1A-E16 1A-E17 1A-E18 1A-E19 1A-E20 1A-E21 1A-E22 1A-E23 1A-E24

1A-F01 1A-F02 1A-F03 1A-F04 1A-F05 1A-F06 1A-F07 1A-F08 1A-F09 1A-F10 1A-F11 1A-F12 1A-F13 1A-F14 1A-F15 1A-F16 1A-F17 1A-F18 1A-F19 1A-F20 1A-F21 1A-F22 1A-F23 1A-F24

1.1

**COPPER
CONNECTIVITY**

V-Max Keystone Jacks

CAT6A

Item #	Description
353-V2812/C6AAL	CAT6A V-Max, Almond
353-V2813/C6ABK	CAT6A V-Max, Black
353-V2814/C6ABL	CAT6A V-Max, Blue
353-V2803/BL/25	CAT6A V-Max, 25-Pack, Blue
353-V2815/C6AGR	CAT6A V-Max, Green
353-V2816/C6AGY	CAT6A V-Max, Gray
353-V2817/C6AIV	CAT6A V-Max, Ivory
353-V2818/C6AOR	CAT6A V-Max, Orange
353-V2819/C6APR	CAT6A V-Max, Purple
353-V2820/C6ARD	CAT6A V-Max, Red
353-V2821/C6AWH	CAT6A V-Max, White
353-V2810/WH/25	CAT6A V-Max, 25-Pack, White
353-V2823/C6ABW	CAT6A V-Max, Bright White
353-V2800/BW/25	CAT6A V-Max, 25-Pack, Bright White
353-V2822/C6AYL	CAT6A V-Max, Yellow



Almond



Black



Blue



Green



Gray



Ivory



Orange



Purple



Red



Bright White



White



Yellow

25-Packs Available
(caps packed separately)

CAT5E

Item #	Description
351-V2612/AL	CAT5E V-Max, Almond
351-V2601/AL/25	CAT5E V-Max, 25-Pack, Almond
351-V2613/BK	CAT5E V-Max, Black
351-V2602/BK/25	CAT5E V-Max, 25-Pack, Black
351-V2614/BL	CAT5E V-Max, Blue
351-V2603/BL/25	CAT5E V-Max, 25-Pack, Blue
351-V2615/GR	CAT5E V-Max, Green
351-V2604/GR/25	CAT5E V-Max, 25-Pack, Green
351-V2616/GY	CAT5E V-Max, Gray
351-V2605/GY/25	CAT5E V-Max, 25-Pack, Gray
351-V2617/IV	CAT5E V-Max, Ivory
351-V2606/IV/25	CAT5E V-Max, 25-Pack, Ivory
351-V2618/OR	CAT5E V-Max, Orange
351-V2607/OR/25	CAT5E V-Max, 25-Pack, Orange
351-V2619/PR	CAT5E V-Max, Purple
351-V2608/PR/25	CAT5E V-Max, 25-Pack, Purple
351-V2620/RD	CAT5E V-Max, Red
351-V2609/RD/25	CAT5E V-Max, 25-Pack, Red
351-V2621/WH	CAT5E V-Max, White
351-V2610/WH/25	CAT5E V-Max, 25-Pack, White
351-V2622/YL	CAT5E V-Max, Yellow
351-V2611/YL/25	CAT5E V-Max, 25-Pack, Yellow

CAT3

Item #	Description
350-V2506/IV	CAT3 Jack, Ivory
350-V2510/WH	CAT3 Jack, White

LIFETIME WARRANTY

CAT6

Item #	Description
352-V2712/AL	CAT6 V-Max, Almond
352-V2701/AL/25	CAT6 V-Max, 25-Pack, Almond
352-V2713/BK	CAT6 V-Max, Black
352-V2702/BK/25	CAT6 V-Max, 25-Pack, Black
352-V2714/BL	CAT6 V-Max, Blue
352-V2703/BL/25	CAT6 V-Max, 25-Pack, Blue
352-V2715/GR	CAT6 V-Max, Green
352-V2704/GR/25	CAT6 V-Max, 25-Pack, Green
352-V2716/GY	CAT6 V-Max, Gray
352-V2705/GY/25	CAT6 V-Max, 25-Pack, Gray
352-V2717/IV	CAT6 V-Max, Ivory
352-V2706/IV/25	CAT6 V-Max, 25-Pack, Ivory
352-V2718/OR	CAT6 V-Max, Orange
352-V2707/OR/25	CAT6 V-Max, 25-Pack, Orange
352-V2719/PR	CAT6 V-Max, Purple
352-V2708/PR/25	CAT6 V-Max, 25-Pack, Purple
352-V2720/RD	CAT6 V-Max, Red
352-V2709/RD/25	CAT6 V-Max, 25-Pack, Red
352-V2723/BW	CAT6 V-Max, Bright White
352-V2700/BW/25	CAT6 V-Max, 25-Pack, Bright White
352-V2721/WH	CAT6 V-Max, White
352-V2710/WH/25	CAT6 V-Max, 25-Pack, White
352-V2722/YL	CAT6 V-Max, Yellow
352-V2711/YL/25	CAT6 V-Max, 25-Pack, Yellow

Compare Bright White, White, Gray, Ivory and Almond colors:



Bright White

White

Gray

Ivory

Almond



CAT3



CAT5E



CAT6



CAT6A



Features:


- Color-coded for T568A and T568B wiring
- Supports PoE Type 1, Type 2, Type 3, and Type 4
- Fits standard keystone wall plates and patch panels
- UL listed and RoHS compliant

I-Punch Tool

078-2150



Time-Saving Solution by Vertical Cable: Terminate V-Max Jacks in Seconds



Strip up to 2 inches of cable jacket. Separate the pairs and maintain twists as close to the point of termination as possible. Select T568A or T568B and align conductors accordingly. Keep the cable jacket close to the connector.



Insert the prepared jack and cable assembly into the I-Punch Tool.



Firmly squeeze the handles, release, and repeat to ensure a complete termination.



Cleanly trimmed conductors. Snap on the cap. Termination complete.

L I F E T I M E W A R R A N T Y

Keystone Couplers

CAT6A, CAT6, CAT5E RJ45 Keystone Couplers - Unshielded

303-KCJ/C6A/BK



302-KCJ/BK



302-KCJ/WH



301-KCJ/BL



Features:

- Universal snap-in fit for keystone openings
- Quick-install design with flexible locking tab
- Gold-plated contacts for consistent signal integrity
- Durable housing for dependable, long-term use
- Compatible with standard patch panels and wall plates



Item

Description

303-KCJ/C6A/BK	CAT6A Keystone Coupler, Unshielded, Black
302-KCJ/BK	CAT6 Keystone Coupler, Unshielded, Black
302-KCJ/WH	CAT6 Keystone Coupler, Unshielded, White
302-KCJ/BL	CAT6 Keystone Coupler, Unshielded, Blue
301-KCJ/BK	CAT5E Keystone Coupler, Unshielded, Black
301-KCJ/BL	CAT5E Keystone Coupler, Unshielded, Blue

CAT6A RJ45 Keystone Couplers - Shielded



Item

Description

303-KCJ/S	CAT6A Keystone Coupler, Shielded
-----------	----------------------------------

V-Max Jacks - Shielded



Features:

- Supports T568A and T568B wiring schemes
- Flexible tab design for quick installation
- Meets or exceeds ANSI/TIA-568.2-D standards
- 360-degree shielding to minimize EMI
- 110-type IDC termination
- UL listed and RoHS compliant
- Includes cable tie for secure termination

Item

Description

303-J2637/C6AS	CAT6A Shielded Jack
302-J2631/S	CAT6 Shielded Jack
301-J2630/S	CAT5E Shielded Jack

Compatible with all blank Vertical Cable Patch Panels (except for 1 RMU 48-port 266-PKM02-D8000)

Related products:



[078-2155/S](#)

[P80](#)



[078-1025](#)

[P80](#)

RJ45 Inline Couplers - CAT6A, CAT6, CAT5E



Features:

- RJ45 female-to-female inline coupler
- Extends Ethernet cable connections
- Available in shielded and unshielded versions
- Compact design for easy installation
- UL listed, ETL listed, and RoHS compliant



Item #	Description
040-3705/C6A/WH	CAT6A RJ45 inline Coupler Extension, White
040-370/C6A/S	CAT6A RJ45 inline Coupler Extension, Shielded
040-369/C6/WH	CAT6 RJ45 inline Coupler Extension, White
040-368/C6/IV	CAT6 RJ45 inline Coupler Extension, Ivory
040-366/C6/S	CAT6 RJ45 inline Coupler Extension, Shielded
040-365/C5/WH	CAT5E RJ45 inline Coupler Extension, White
040-364/C5/IV	CAT5E RJ45 inline Coupler Extension, Ivory
040-362/C5/S	CAT5E RJ45 inline Coupler Extension, Shielded

Junction Boxes - CAT6, CAT5E



Features:

- Compatible with 110 type termination tools
- Supports T568A and T568B wiring schemes
- Includes screws and adhesive mounting tape
- Fire-retardant housing for added safety
- Durable high-impact ABS construction
- Suitable for 22–26 AWG solid wire
- Available in shielded and unshielded versions

Item #	Description
040-374/C6J/S	CAT6 Shielded Junction Box, T568A and T568B Standards, Compatible with 110 Termination tools
040-372/C6J/WH	CAT6 Junction Box, White, T568A and T568B Standards, Compatible with 110 Termination tools
040-373/C5J/S	CAT5E Shielded Junction Box, T568A and T568B Standards, Compatible with 110 Termination tools
040-371/C5J/WH	CAT5E Junction Box, White, T568A and T568B Standards, Compatible with 110 Termination tools




Perfect Color Match. Seamless Finish.

*Designed to blend in —
so your installation
stands out.*



Decora Style Wall Plates

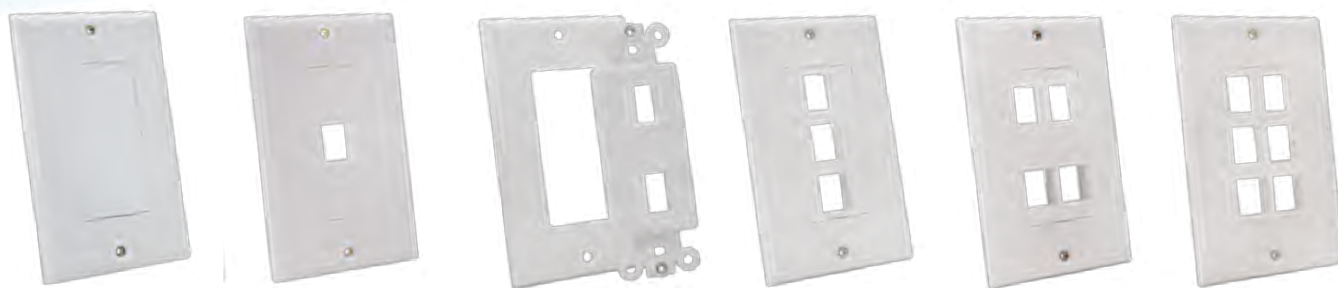

Features:

- Decora-style, single-gang design
- Available in 0, 1, 2, 3, 4, and 6-port options
- Compatible with standard keystone inserts
- High-impact ABS construction
- UL 94 V-0 flame-retardant rated
- Smooth, low-gloss finish
- Includes color-matched mounting screws

# of Ports	Item #	Description
0	308-603D/0P/WH	Keystone Wall Plate, 0-Port, Decora Style
1	308-607D/1P/WH	Keystone Wall Plate, 1-Port, Decora Style
2	308-611D/2P/WH	Keystone Wall Plate, 2-Port, Decora Style
3	308-615D/3P/WH	Keystone Wall Plate, 3-Port, Decora Style
4	308-619D/4P/WH	Keystone Wall Plate, 4-Port, Decora Style
6	308-623D/6P/WH	Keystone Wall Plate, 6-Port, Decora Style


Standard Wall Plates



# of Ports	Almond	Black	Ivory	White	Gray
(0) Blank	304-J2628/0P/AL	N/A	304-J2629/0P/IV	304-J2630/0P/WH	304-J2660/0P/GY
1 Port	304-J2631/1P/AL	304-J2646/1P/BK	304-J2632/1P/IV	304-J2633/1P/WH	304-J2661/1P/GY
2 Port	304-J2634/2P/AL	304-J2647/2P/BK	304-J2635/2P/IV	304-J2636/2P/WH	304-J2662/2P/GY
3 Port	304-J2637/3P/AL	304-J2648/3P/BK	304-J2638/3P/IV	304-J2639/3P/WH	N/A
4 Port	304-J2640/4P/AL	304-J2649/4P/BK	304-J2641/4P/IV	304-J2642/4P/WH	304-J2664/4P/GY
6 Port	304-J2643/6P/AL	N/A	304-J2644/6P/IV	304-J2645/6P/WH	304-J2665/6P/GY
8 Port	N/A	N/A	N/A	304-2803/8P/WH	N/A
12 Port	N/A	N/A	N/A	304-2806/12P/WH	N/A



Surface-mount Mounting Boxes



022-118WH

022-119IV



Item #	Description
022-117WH/D	Single Gang Junction Box, White 2.75(W)x4.5(H)x1.85(D)
022-118WH	Single Gang Junction Box, White 2.75(W)x4.5(H)x1.5(D)
022-119IV	Single Gang Junction Box, Ivory 2.75(W)x4.5(H)x1.5(D)



Illustration of a loaded wall plate mounted on the junction box

Dry-Wall Brackets



022-DWB/1G



022-DWB/2G



022-MB/1G



022-MB/2G



Item #	Description
022-DWB/1G	Single Gang Dry Wall Bracket for US Type Face Plate – Low Voltage Class 2
022-DWB/2G	Double Gang Dry Wall Bracket for US Type Face Plate – Low Voltage Class 2
022-MB/1G	Single Gang Mounting Bracket, Nail-on, Low Voltage Class 2
022-MB/2G	Double Gang Mounting Bracket, Nail-on, Low Voltage Class 2

Feedthrough Wall Plates



307-503F/1G/WH



307-507F/2G/WH



307-511R/1G/WH



307-515R/2G/WH



307-520B/1G/WH

Features:

- High-impact ABS construction
- Comes with matching-color mounting screws
- Smooth finish



Item #	Description
307-503F/1G/WH	Feedthrough Wall Plate, Single Gang
307-507F/2G/WH	Feedthrough Wall Plate, Double Gang
307-511R/1G/WH	Feedthrough Recessed Wall Plate, Single Gang
307-515R/2G/WH	Feedthrough Recessed Wall Plate, Double Gang
307-520B/1G/WH	Feedthrough Wall Plate Brush Type, Decora Style

Keystone Wall Plates

Standard Wall Plates - Stainless Steel



Features:

- Standard size, Single Gang
- Stainless steel brushed finish
- High-impact ABS Base

Item #	Description
304-J2651/0P/S	Stainless Steel Wall Plate, 0 Port
304-J2652/1P/S	Stainless Steel Wall Plate, 1 Port
304-J2653/2P/S	Stainless Steel Wall Plate, 2 Port
304-J2654/3P/S	Stainless Steel Wall Plate, 3 Port
304-J2655/4P/S	Stainless Steel Wall Plate, 4 Port



Mid-size Wall Plates



Standard 2,78" x 4,5"
Mid-size 3,15" x 4,88"

# of Ports	Item #	Description
0	304-M2725/0P/WH	Keystone Mid Size Wall Plate, 0-Port, White
1	304-M2726/1P/WH	Keystone Mid Size Wall Plate, 1-Port, White
2	304-M2727/2P/WH	Keystone Mid Size Wall Plate, 2-Port, White
3	304-M2728/3P/WH	Keystone Mid Size Wall Plate, 3-Port, White
4	304-M2729/4P/WH	Keystone Mid Size Wall Plate, 4-Port, White
6	304-M2730/6P/WH	Keystone Mid Size Wall Plate, 6-Port, White

Standard Wall Plate with ID Window



305-306ID/1P/IV

305-311ID/2P/WH

305-314ID/3P/IV

305-319ID/4P/WH

305-322ID/6P/IV

Features:


- High-impact ABS construction
- Comes with matching-color mounting screws
- Smooth finish
- Available in Ivory and White

# of Ports	Ivory	White
1 Port	305-306ID/1P/IV	305-307ID/1P/WH
2 Port	305-310ID/2P/IV	305-311ID/2P/WH
3 Port	305-314ID/3P/IV	305-315ID/3P/WH
4 Port	305-318ID/4P/IV	305-319ID/4P/WH
6 Port	305-322ID/6P/IV	305-323ID/6P/WH



Surface Mount Boxes

1, 2, 4 and 6 Ports - Blank

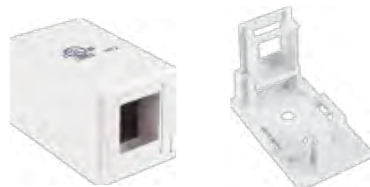

039-358WH



1-Port



039-359AL




2-Port



039-362IV



4-Port

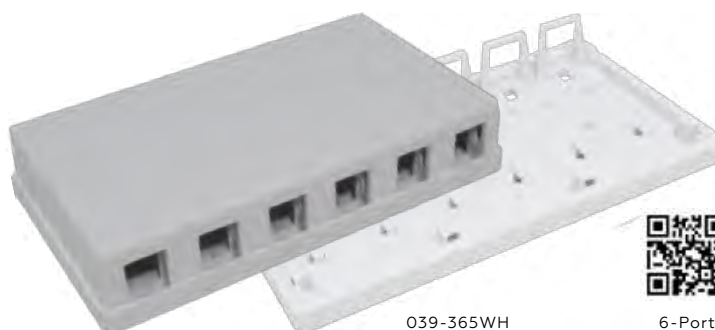

039-365WH



6-Port

Includes:



Double-sided tape,
screws, cable tie

Features:

- Surface-mount box, 1–6 ports
- Keystone compatible (unpopulated)
- Includes mounting hardware
- Two-piece design
- Multiple color options
- UL-listed, RoHS-compliant



Item #	Description
039-356AL	1-Port, Surface Mount Box, Almond
039-357IV	1-Port, Surface Mount Box, Ivory
039-358WH	1-Port, Surface Mount Box, White
039-359AL	2-Port, Surface Mount Box, Almond
039-360IV	2-Port, Surface Mount Box, Ivory
039-361WH	2-Port, Surface Mount Box, White
039-362IV	4-Port, Surface Mount Box, Ivory
039-362WH	4-Port, Surface Mount Box, White
039-364IV	6-Port, Surface Mount Box, Ivory
039-365WH	6-Port, Surface Mount Box, White

Snack on this: The “biscuit” is the cleanest way to finish a run



1 and 2 Ports - With Jacks

CAT6A

038-C6A/1P/WH

038-C6A/2P/WH



2-Port

Includes:



Double-sided tape,
screws, cable tie

CAT6

038-357WH

038-358IV



2-Port

CAT5E

038-352WH

038-355WH



1-Port

Features:

- Durable ABS construction
- Includes mounting hardware
- Gloss finish
- Integrated 110-type termination blocks
- Shielded construction for CAT6A applications
- UL 94 V-0 flame rated and UL-listed



Item #	Description
038-C6A/1P/WH	1-Port SMB, Shielded with CAT6A Jack, White
038-C6A/2P/WH	2-Port SMB, Shielded with CAT6A Jack, White
038-356IV	1-Port SMB with CAT6 Jack, Ivory
038-357WH	1-Port SMB with CAT6 Jack, White
038-358IV	2-Port SMB with CAT6 Jack, Ivory
038-359WH	2-Port SMB with CAT6 Jack, White
038-351IV	1-Port SMB with CAT5E Jack, Ivory
038-352WH	1-Port SMB with CAT5E Jack, White
038-354IV	2-Port SMB with CAT5E Jack, Ivory
038-355WH	2-Port SMB with CAT5E Jack, White

Related Products:

Patch cords [P74](#)



093-695/1YL



076-1053/7WH



077-2089/14WH

Keystone couplers [P56](#)



302-KJC/BL

Impact Punch Down Too [P80](#)



078-1025

Patch Panels

CAT6A Patch Panel, 24 Port



Item #	Description
042-381/U6A/24	CAT6A, 110-IDC Patch Panel, 24 Port, Black

Cable Management Bars

P127



CAT6 and CAT5E Patch Panels, 12, 24, 48 & 96 Port

042-376/12 / 041-371/12



042-377/24 / 041-372/24



042-378/48 / 041-373/48



041-375/96



CAT6

Item #	Description
042-376/12	CAT6, 110-IDC Patch Panel, 12 Port, Black
042-377/24	CAT6, 110-IDC Patch Panel, 24 Port, Black
042-378/48	CAT6, 110-IDC Patch Panel, 48 Port, Black

Port Spacing
0.72 in (Brother label printer)
0.71 in (Epson label printer)

CAT5E

Item #	Description
041-371/12	CAT5E, 110-IDC Patch Panel, 12 Port, Black
041-372/24	CAT5E, 110-IDC Patch Panel, 24 Port, Black
041-373/48	CAT5E, 110-IDC Patch Panel, 48 Port, Black
041-375/96	CAT5E, 110-IDC Patch Panel, 96 Port, Black


Features:

- High Impact Patch Panel
- Number Labeled for Easy Identification
- 110 Type Termination

12 Port Surface-Mount Mini Patch Panels - CAT6, CAT5E & Blank

front

rear



042-2134

041-370M

043-381/12M

Features:

Loaded:

- High Impact Patch Panel
- Number Labeled for Easy Identification
- 110 Type Termination

Blank:

- Compatible with most keystone inserts



Item #	Description
042-2134	CAT6 , 110-IDC 12 Port Mini Patch Panel, with Support Bracket, Black
041-370M	CAT5E , 110-IDC 12 Port Mini Patch Panel, with Support Bracket, Black
043-381/12M	Blank Mini Patch Panel, 12 Port, with Support Bracket, Black

Patch Panels

CAT6A, CAT6 Shielded Patch Panels



24 Port



48 Port



Try our
Vertical
Wall-Mount
Brackets, 1-4
RMU

047-WVR Series

[P128](#)

Item #	Description
042-C6A/24	CAT6A, Shielded 24 Port, Krone Type, Patch Panel 1 RMU
042-C6A/48	CAT6A, Shielded 48 Port, Krone Type, Patch Panel 1 RMU
042-377/S/24	CAT6, Shielded Krone type Patch Panel, 24 Port, Black
042-378/S/48	CAT6, Shielded Krone type Patch Panel, 48 Port, Black



CAT5E Shielded Patch Panel, 24 & 48 Port



24 Port



48 Port



Features:

- Meets or exceeds ANSI/TIA-568-2-D specifications
- T568A/T568B wiring scheme
- Grounding wire: 18 AWG wire with Green/Yellow stripes, length 15.7 in (40 cm).



Item #	Description
041-372/S/24	CAT5E, Shielded Krone type Patch Panel, 24 Port, Black
041-373/S/48	CAT5E, Shielded Krone type Patch Panel, 48 Port, Black

Comes with M6 screws, mini-cable-ties & grounding wire



[Screws](#)

[P127](#)

Compatible tool: 078-1025

[P80](#)



Patch Panels >> BLANK PATCH PANELS

Blank Keystone Patch Panels - Shielded Insert Compatible



Item #	Description
043-378/S/24/1U	Blank Keystone Patch Panel, 24 Port, Shielded Insert Compatible
043-379/S/48/2U	Blank Keystone Patch Panel. 48 Port, Shielded Insert Compatible



Features:

- Heavy-duty 16-gauge steel construction
- UL94 V-0 fire-retardant rated
- Integrated grounding with drain wire
- Durable black powder-coated finish



Blank Keystone Patch Panels



Item #	Description
043-382/24/1U	Blank Keystone Patch Panel, with Cable Manager, 1 RMU, 24 Port, Black
043-384/48/2U	Blank Keystone Patch Panel, with Cable Manager, 2 RMU, 48 Port, Black



Features:

- Heavy-duty 16-gauge steel construction
- UL94 V-0 fire-retardant material
- Cable manager included
- Durable black powder-coated finish



Blank Panels are compatible with most VC keystone inserts:




Blank V-Type Panels




Item #	Description
043-383/A/24	Blank Patch Panel, V-Type, 24 Port
043-384/A/48	Blank Patch Panel, V-Type, 48 Port

Features:

- Heavy-duty 16-gauge steel construction
- UL94 V-0 fire-retardant material
- V-type design for improved cable management

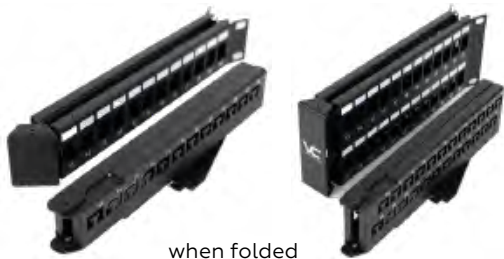

Blank Keystone Patch Panels - Standard Density

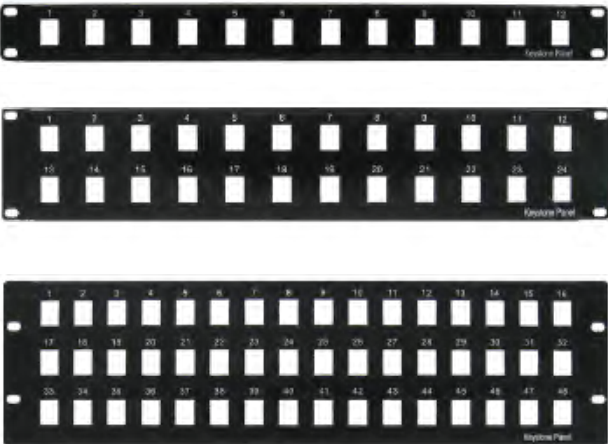

1 RMU

2 RMU

3 RMU

Keystone Modules	P56
V-Max Keystone Jacks	P31
Patch Cords	P48
Racks	P118

Features:

- Constructed from heavy-duty 16-gauge steel and UL94-V-0 high-impact, fire-retardant material
- Durable black powder coat finish
- 4 x M6 screws

Item #	Description
043-380/12	Blank Patch Panel, 12 Port, Black
043-382/24	Blank Patch Panel, 24 Port, Black
043-384/48	Blank Patch Panel, 48 Port, Black



037-321GY



037-328BK



264-KMB03-4C-WH



245-KJC/FF/180



Blank Keystone Patch Panels - Unshielded Panels



Item #	Description
266-PKM02-24000	Blank Patch Panel, 24 Port , 1 RMU
266-PKM02-D8000	Blank Patch Panel, 48 Port , 1 RMU - High Density Panel

Cable Manager not included



[Keystone Jacks](#)

[P54](#)


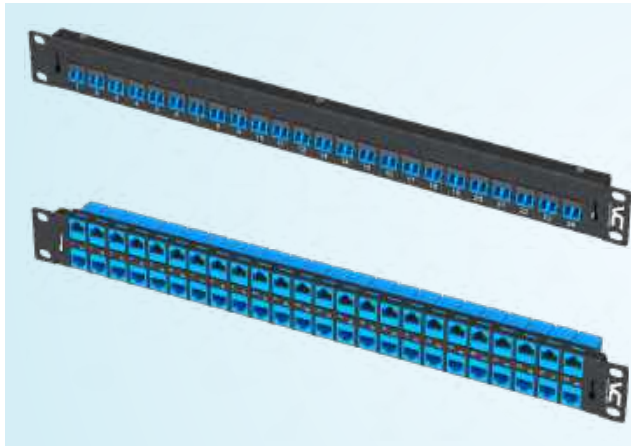


Illustration of a 24-port panel loaded with fiber connectors

Illustration of a 48-port panel loaded with keystone jacks

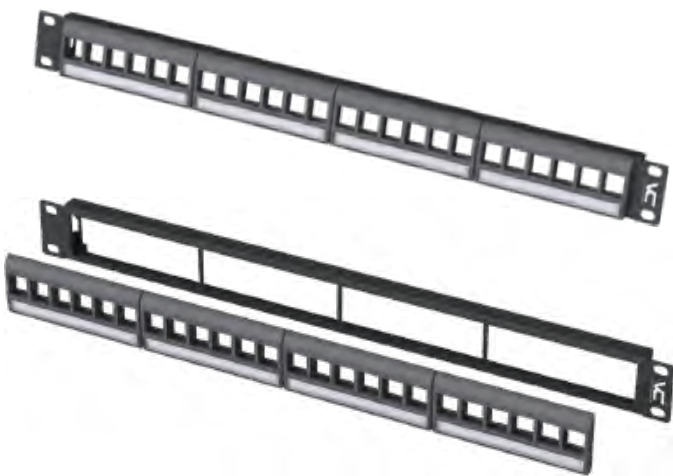

Item #	Description
266-PKM04-24000	Blank Patch Panel, Front-Retractable Keystone-Module Blocks, 1 RMU, 24 Port , Black

Cable Manager not included



Features:

- Universal Mounting Standard
- Durable Construction
- Black Powder Coating Finishing
- Integrated Labeling System
- Front Pull-Out Module Blocks


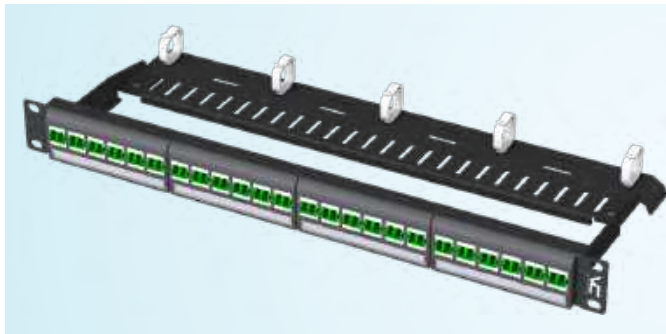


Illustration of a 48-port panel loaded with fiber connectors and one cable management bar

Cable Management Bars for 266-PKM Series Panels



Item #	Description
266-CFM00-2A3	Cable Management Bar, General Purpose, 3-in Depth
266-CFM00-2A4	Cable Management Bar, General Purpose, 4-in Depth
266-CFM00-2B3	Cable Management Bar, Optical Fiber, 3-in Depth
266-CFM00-2B4	Cable Management Bar, Optical Fiber, 4-in Depth
266-CFM00-2A2A	Cable Management Bar, 2-in Deep, Extended Width

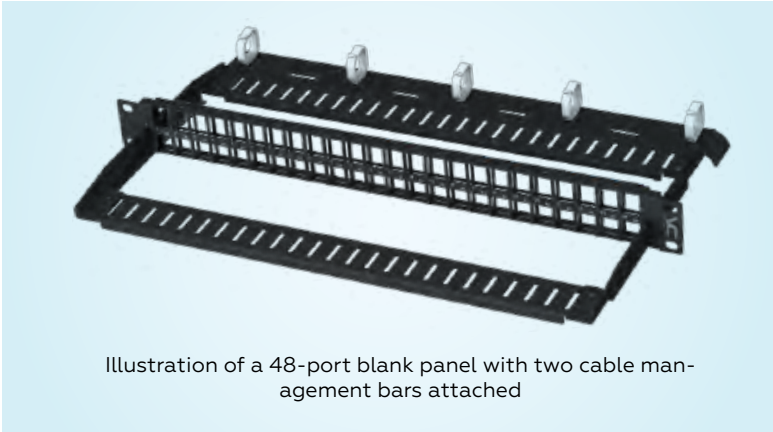


Rack-Mount Identification and Labeling

Zero-U Administration Panels



Item #	Description
266-LBL00-A0A4A	Administration Panel, Zero-U, Rack-Mount
266-LBL00-A1A4A	Administration Panel, Zero-U, Panel-Mount
266-LBL04-HLDR	Quarter Label, 4x label holders per kit
266-LBL03-HLDR	Third Label Holders, 3x label holders per kit

4x label holders are included with panel

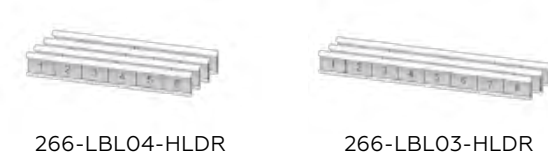

Panel Covers

Blank Filler Panels - Vented and Non-vented



1 RMU

Height 1 3/4 in Width 19 in Depth 0.5 in Weight 1 lb



2 RMU

Height 3.5 in Width 19 in Depth 0.5 in Weight 2 lb



3 RMU

Height 5 1/4 in Width 19 in Depth 0.5 in Weight 2 lb



4 RMU

Height 6 7/8 in Width 19 in Depth 0.5 in Weight 2.4 lb

Vented Filler Panels

Item #	Description
043-385/VT/1U	1 RMU, Vented Panel Cover/Filler 19 in Rack Mountable
043-386/VT/2U	2 RMU, Vented Panel Cover/Filler 19 in Rack Mountable
043-387/VT/3U	3 RMU, Vented Panel Cover/Filler 19 in Rack Mountable

Features:

- Mounts on any standard 19-in rack hardware
- Vented for allowing air circulation and improving lighting conditions
- Made of 1.5-mm steel
- Impact and static-resistant black paint finish



Non-Vented Filler Panels

Item #	Description
043-385/1U	1 RMU, Non-Vented Panel Cover/Filler 19 in Rack Mountable
043-386/2U	2 RMU, Non-Vented Panel Cover/Filler 19 in Rack Mountable
043-387/3U	3 RMU, Non-Vented Panel Cover/Filler 19 in Rack Mountable
043-388/4U	4 RMU, Non-Vented Panel Cover/Filler 19 in Rack Mountable

Features:

- Mounts on any standard 19-in rack hardware
- Made of 1.5-mm steel
- Impact and static-resistant black paint finish
- Improves cooling efficiency by isolating air flows, provides installation with a clean, aesthetic appearance

Hardware:
4x M6 screws



Cable Management Brush Panels



1 RMU

Height 1.8 in Width 19 in Depth 0.4 in Weight 1.2 lb



2 RMU

Height 3.5 in Width 19 in Depth 0.4 in Weight 1.2 lb

Item #	Description
047-WBP-1000	1 RMU Network Brush Panel, 19 in Rack Mount
047-WBP-2000	2 RMU Network Brush Panel, 19 in Rack Mount

Features:

- High density nylon brush
- Reduces dust penetration into protected space



VC
VERTICAL CABLE

Patch Cords

TYPE / CATEGORY	CAT6A	CAT6	CAT5E
Shielded	076 Series 0.5, 1, 3, 5, 7, 10, 14, 25 FT	-	-
Unshielded with Protector	077 Series (Slim) 0.5, 1, 2, 3, 5, 7, 10, 14, 25, 50 FT	094 Series 0.5, 1, 2, 3, 4, 5, 6, 7, 10, 14, 20, 25, 35, 50, 75, 100 FT	092 Series 0.5, 1, 2, 3, 4, 5, 6, 7, 10, 14, 20, 25, 35, 50, 75, 100 FT
Unshielded without Protector	-	095 Series 1, 3, 5, 6, 7, 10, 14, 25 FT	093 Series 1, 3, 5, 7, 10, 14, 25 FT

CAT6A Patch Cords: S/STP (Shielded/Foiled Twisted Pair) with Boot and Protector

							
Size	Black	Blue	Green	Gray	Red	White	Yellow
1/2 FT	076-1002/05BK	076-1001/05BL	076-1003/05GR	076-1004/05GY	Special Order	076-1008/05WH	Special Order
1 FT	076-1010/1BK	076-1011/1BL	076-1012/1GR	076-1013/1GY	076-1016/1RD	076-1017/1WH	076-1018/1YL
3 FT	076-1028/3BK	076-1029/3BL	076-1030/3GR	076-1031/3GY	076-1034/3RD	076-1035/3WH	076-1036/3YL
5 FT	076-1037/5BK	076-1038/5BL	076-1039/5GR	076-1040/5GY	076-1043/5RD	076-1044/5WH	076-1045/5YL
7 FT	076-1046/7BK	076-1047/7BL	076-1048/7GR	076-1049/7GY	076-1052/7RD	076-1053/7WH	076-1054/7YL
10 FT	076-1055/10BK	076-1056/10BL	076-1057/10GR	076-1058/10GY	076-1061/10RD	076-1062/10WH	076-1063/10YL
14 FT	076-1064/14BK	076-1065/14BL	076-1066/14GR	076-1067/14GY	076-1070/14RD	076-1071/14WH	076-1072/14YL
25 FT	076-1073/25BK	076-1074/25BL	076-1075/25GR	076-1076/25GY	076-1079/25RD	076-1080/25WH	076-1081/25YL

Features:

- CAT6A transmission performance
- Supports PoE Type 2 IEEE 802.3at (25.5W)
- Flame-retardant PVC jacket
- Gold-plated contacts
- UL-listed and RoHS-Compliant
- 4 pairs of 24-AWG stranded insulated bare copper conductors



Shielded Keystone Jacks

P56



Patch Cords

CAT6A Patch Cords: UTP with Protector (Slim Type)

Size	Black	Blue	Green	Gray	Orange	Purple	Red	White	Yellow
1/2 FT	077-2010/05BK	077-2011/05BL	077-2012/05GR	077-2013/05GY	077-2014/05OR	077-2015/05PR	077-2016/05RD	077-2017/05WH	077-2018/05YL
1 FT	077-2019/1BK	077-2020/1BL	077-2021/1GR	077-2022/1GY	077-2023/1OR	077-2024/1PR	077-2025/1RD	077-2026/1WH	077-2027/1YL
2 FT	077-2028/2BK	077-2029/2BL	077-2030/2GR	077-2031/2GY	077-2032/2OR	077-2033/2PR	077-2034/2RD	077-2035/2WH	077-2036/2YL
3 FT	077-2037/3BK	077-2038/3BL	077-2039/3GR	077-2040/3GY	077-2041/3OR	077-2042/3PR	077-2043/3RD	077-2044/3WH	077-2045/3YL
5 FT	077-2046/5BK	077-2047/5BL	077-2048/5GR	077-2049/5GY	077-2050/5OR	077-2051/5PR	077-2052/5RD	077-2053/5WH	077-2054/5YL
7 FT	077-2064/7BK	077-2065/7BL	077-2066/7GR	077-2067/7GY	077-2068/7OR	077-2069/7PR	077-2070/7RD	077-2071/7WH	077-2072/7YL
10 FT	077-2073/10BK	077-2074/10BL	077-2075/10GR	077-2076/10GY	077-2077/10OR	077-2078/10PR	077-2079/10RD	077-2080/10WH	077-2081/10YL
14 FT	077-2082/14BK	077-2083/14BL	077-2084/14GR	077-2085/14GY	077-2086/14OR	077-2087/14PR	077-2088/14RD	077-2089/14WH	077-2090/14YL
25 FT	077-2100/25BK	077-2101/25BL	077-2102/25GR	077-2103/25GY	077-2104/25OR	077-2105/25PR	077-2106/25RD	077-2107/25WH	077-2108/25YL
50 FT	077-2109/50BK	077-2110/50BL	Special Order	Special Order	Special Order	Special Order	Special Order	077-2116/50WH	Special Order

6-inch Patch Cords are Available in 24-Packs

Item #	Description
077-3000/05BK24	CAT6A Slim patch cord, 6-in, 28 AWG, PoE Type 2, 24-pack, Black
077-3001/05BL24	CAT6A Slim patch cord, 6-in, 28 AWG, PoE Type 2, 24-pack, Blue
077-3002/05GR24	CAT6A Slim patch cord, 6-in, 28 AWG, PoE Type 2, 24-pack, Green
077-3003/05GY24	CAT6A Slim patch cord, 6-in, 28 AWG, PoE Type 2, 24-pack, Gray
077-3004/05OR24	CAT6A Slim patch cord, 6-in, 28 AWG, PoE Type 2, 24-pack, Orange
077-3005/05PR24	CAT6A Slim patch cord, 6-in, 28 AWG, PoE Type 2, 24-pack, Purple
077-3006/05RD24	CAT6A Slim patch cord, 6-in, 28 AWG, PoE Type 2, 24-pack, Red
077-3007/05WH24	CAT6A Slim patch cord, 6-in, 28 AWG, PoE Type 2, 24-pack, White
077-3008/05YL24	CAT6A Slim patch cord, 6-in, 28 AWG, PoE Type 2, 24-pack, Yellow



Highlights:

Ultra-slim profile improves airflow in racks and cabinets
 Ideal for high-density, clean, and organized installations
 Multiple colors & lengths available
 Supports PoE+ (Type 2)
 Exact-length design

**Ultra-Slim. High Density.
Clean Installations.**



Features:

- CAT6A transmission performance
- CM-Rated
- PoE Type 2 IEEE 802.3at (25.5W)
- Flame-retardant PVC jacket
- Gold-plated contacts
- RoHS-Compliant
- 4 pairs of 28-AWG stranded insulated bare copper conductors



Patch Cords

CAT6 Patch Cords - UTP Non-Booted



Size	Black	Blue	Green	Gray	Red	White	Yellow
1 FT	095-903/1BK	095-904/1BL	095-905/1GR	095-906/1GY	095-909/1RD	095-910/1WH	095-911/1YL
2 FT	095-912/2BK	095-913/2BL	095-914/2GR	095-915/2GY	095-918/2RD	095-919/2WH	095-920/2YL
3 FT	095-921/3BK	095-922/3BL	095-923/3GR	095-924/3GY	095-927/3RD	095-928/3WH	095-929/3YL
5 FT	095-930/5BK	095-931/5BL	095-932/5GR	095-933/5GY	095-936/5RD	095-937/5WH	095-938/5YL
7 FT	095-939/7BK	095-940/7BL	095-941/7GR	095-942/7GY	095-945/7RD	095-946/7WH	095-947/7YL
10 FT	095-948/10BK	095-949/10BL	095-950/10GR	095-951/10GY	095-954/10RD	095-955/10WH	095-956/10YL
14 FT	095-957/14BK	095-958/14BL	095-959/14GR	095-960/14GY	095-963/14RD	095-964/14WH	095-965/14YL
25 FT	095-975/25BK	095-976/25BL	095-977/25GR	095-978/25GY	095-981/25RD	095-982/25WH	095-983/25YL

Features:

- CAT6 transmission performance
- CM-Rated
- Flame-retardant PVC jacket
- Gold-plated contactss
- RoHS-Compliant
- 4 pairs of 24-AWG stranded insulated bare copper conductors

CAT6 Patch Cords - UTP with Boot and Protector



Size	Black	Blue	Green	Gray	Orange	Purple	Red	White	Yellow
1/2 FT	094-786/05BK	094-787/05BL	094-788/05GR	094-789/05GY	094-790/05OR	094-791/05PR	094-792/05RD	094-793/05WH	094-794/05YL
1 FT	094-795/1BK	094-796/1BL	094-797/1GR	094-798/1GY	094-799/1OR	094-800/1PR	094-801/1RD	094-802/1WH	094-803/1YL
2 FT	094-804/2BK	094-805/2BL	094-806/2GR	094-807/2GY	094-808/2OR	094-809/2PR	094-810/2RD	094-811/2WH	094-812/2YL
3 FT	094-813/3BK	094-814/3BL	094-815/3GR	094-816/3GY	094-817/3OR	094-818/3PR	094-819/3RD	094-820/3WH	094-821/3YL
4 FT	094-821/4BK	094-8212/4BL	094-8213/4GR	094-8214/4GY	Special Order	Special Order	094-8217/4RD	094-8218/4WH	094-8219/4YL
5 FT	094-822/5BK	094-823/5BL	094-824/5GR	094-825/5GY	094-826/5OR	094-827/5PR	094-828/5RD	094-829/5WH	094-830/5YL
6 FT	094-8301/6BK	094-8302/6BL	094-8303/6GR	094-8304/6GY	094-8305/6OR	094-8306/6PR	094-8307/6RD	094-8308/6WH	094-8309/6YL
7 FT	094-831/7BK	094-832/7BL	094-833/7GR	094-834/7GY	094-835/7OR	094-836/7PR	094-837/7RD	094-838/7WH	094-839/7YL
10 FT	094-840/10BK	094-841/10BL	094-842/10GR	094-843/10GY	094-844/10OR	094-845/10PR	094-846/10RD	094-847/10WH	094-848/10YL
14 FT	094-849/14BK	094-850/14BL	094-851/14GR	094-852/14GY	094-853/14OR	094-854/14PR	094-855/14RD	094-856/14WH	094-857/14YL
20 FT	094-858/20BK	094-859/20BL	094-860/20GR	094-861/20GY	094-862/20OR	094-863/20PR	094-864/20RD	094-865/20WH	094-866/20YL
25 FT	094-867/25BK	094-868/25BL	094-869/25GR	094-870/25GY	094-871/25OR	094-872/25PR	094-873/25RD	094-874/25WH	094-875/25YL
35 FT	Special Order	094-8752/35BL	Special Order	094-8754/35GY	Special Order	Special Order	Special Order	094-8758/35WH	Special Order
50 FT	094-876/50BK	094-877/50BL	094-878/50GR	094-879/50GY	094-880/50OR	094-881/50PR	094-882/50RD	094-883/50WH	094-884/50YL
75 FT	094-885/75BK	094-886/75BL	094-887/75GR	094-888/75GY	094-889/75OR	094-890/75PR	094-891/75RD	094-892/75WH	094-893/75YL
100 FT	094-894/100BK	094-895/100BL	094-896/100GR	094-897/100GY	094-898/100OR	094-899/100PR	094-900/100RD	094-901/100WH	094-902/100YL



Good news!

Plenum-Rated Patch Cords are Available for Special Order



CAT5E Patch Cords - UTP Non-Booted



Size	Black	Blue	Green	Gray	Red	White	Yellow
1 FT	093-687/1BK	093-688/1BL	093-689/1GR	093-690/1GY	093-693/1RD	093-694/1WH	093-695/1YL
2 FT	093-696/2BK	093-697/2BL	093-698/2GR	093-699/2GY	093-702/2RD	093-703/2WH	093-704/2YL
3 FT	093-705/3BK	093-706/3BL	093-707/3GR	093-708/3GY	093-711/3RD	093-712/3WH	093-713/3YL
5 FT	093-714/5BK	093-715/5BL	093-716/5GR	093-717/5GY	093-720/5RD	093-721/5WH	093-722/5YL
7 FT	093-723/7BK	093-724/7BL	093-725/7GR	093-726/7GY	093-729/7RD	093-730/7WH	093-731/7YL
10 FT	093-732/10BK	093-733/10BL	093-734/10GR	093-735/10GY	093-738/10RD	093-739/10WH	093-740/10YL
14 FT	093-741/14BK	093-742/14BL	093-743/14GR	093-744/14GY	093-747/14RD	093-748/14WH	093-749/14YL
25 FT	093-759/25BK	093-760/25BL	093-761/25GR	093-762/25GY	093-765/25RD	093-766/25WH	093-767/25YL



Features:

- CAT5E transmission performance
- Flame-retardant PVC jacket
- CM-Rated
- Gold-Plated Contacts
- RoHS-Compliant
- 4 pairs of 24-AWG stranded insulated bare copper conductors

CAT5E Patch Cords - UTP with Boot and Protector



Size	Black	Blue	Green	Gray	Orange	Purple	Red	White	Yellow
1/2 FT	092-570/05BK	092-571/05BL	092-572/05GR	092-573/05GY	092-574/05OR	092-575/05PR	092-576/05RD	092-577/05WH	092-578/05YL
1 FT	092-579/1BK	092-580/1BL	092-581/1GR	092-582/1GY	092-583/1OR	092-584/1PR	092-585/1RD	092-586/1WH	092-587/1YL
2 FT	092-588/2BK	092-589/2BL	092-590/2GR	092-591/2GY	092-592/2OR	092-593/2PR	092-594/2RD	092-595/2WH	092-596/2YL
3 FT	092-597/3BK	092-598/3BL	092-599/3GR	092-600/3GY	092-601/3OR	092-602/3PR	092-603/3RD	092-604/3WH	092-605/3YL
4 FT	092-6051/4BK	092-6052/4BL	092-6053/4GR	092-6054/4GY	Special Order	092-6056/4PR	092-6057/4RD	092-6058/4WH	092-6059/4YL
5 FT	092-606/5BK	092-607/5BL	092-608/5GR	092-609/5GY	092-610/5OR	092-611/5PR	092-612/5RD	092-613/5WH	092-614/5YL
6 FT	092-6141/6BK	092-6142/6BL	092-6143/6GR	092-6144/6GY	092-6145/6OR	092-6146/6PR	092-6147/6RD	092-6148/6WH	092-6149/6YL
7 FT	092-615/7BK	092-616/7BL	092-617/7GR	092-618/7GY	092-619/7OR	092-620/7PR	092-621/7RD	092-622/7WH	092-623/7YL
10 FT	092-624/10BK	092-625/10BL	092-626/10GR	092-627/10GY	092-628/10OR	092-629/10PR	092-630/10RD	092-631/10WH	092-632/10YL
14 FT	092-633/14BK	092-634/14BL	092-635/14GR	092-636/14GY	092-637/14OR	092-638/14PR	092-639/14RD	092-640/14WH	092-641/14YL
20 FT	092-642/20BK	092-643/20BL	092-644/20GR	092-645/20GY	092-646/20OR	092-647/20PR	092-648/20RD	092-649/20WH	092-650/20YL
25 FT	092-651/25BK	092-652/25BL	092-653/25GR	092-654/25GY	Special Order	092-656/25PR	092-657/25RD	092-658/25WH	092-659/25YL
35 FT	Special Order	092-6592/35BL	Special Order	092-6594/35GY	Special Order	Special Order	Special Order	092-6598/35WH	Special Order
50 FT	092-660/50BK	092-661/50BL	092-662/50GR	092-663/50GY	092-664/50OR	092-665/50PR	092-666/50RD	092-667/50WH	092-668/50YL
75 FT	092-669/75BK	092-670/75BL	092-671/75GR	092-672/75GY	092-673/75OR	092-674/75PR	092-675/75RD	092-676/75WH	092-677/75YL
100 FT	092-678/100BK	092-679/100BL	092-680/100GR	092-681/100GY	092-682/100OR	092-683/100PR	092-684/100RD	092-685/100WH	092-686/100YL



HDMI Cable & Accessories

HDMI High Speed Digital Cables with Ethernet - CL3 (In-Wall)



Features:

- High-speed HDMI cable with amplifier (100 feet)
- Gold-plated Type-A 19-pin connectors
- 18 Gbps bandwidth – up to 4K
- Supports high refresh rates up to 360 Hz
- Directional (Input/Output) design
- RoHS compliant
- CL3 in-wall rated

Item #	Description
242-030/3FT	HDMI 2.0 Ultra HD 4Kx2K 60 HZ, 3 ft
242-032/6 FT	HDMI 2.0 Ultra HD 4Kx2K 60 HZ, 6 ft
242-034/10FT	HDMI 2.0 Ultra HD 4Kx2K 60 HZ, 10 ft
242-037/15FT	HDMI 2.0 Ultra HD 4Kx2K 60 HZ, 15 ft
242-038/25FT	HDMI 2.0 Ultra HD 4Kx2K 60 HZ, 25 ft
242-040/30FT	HDMI 2.0 Ultra HD 4Kx2K 60 HZ, 30 ft
242-042/50FT	HDMI 2.0 Ultra HD 4Kx2K 60 HZ, 50 ft
242-043/75FT	HDMI 2.0 Ultra HD 4Kx2K 60 HZ, 75 ft (Directional)
242-044/100FT	HDMI 2.0 with Amplifier, Ultra HD 4Kx2K 60 HZ, 100 ft (Directional)

F81 Wall Plates



028-WP/F81R11



028-WP/1XF81

Features:

- Standard single-gang wall plate for easy installation
- Compatible with F81 and keystone configurations
- Reliable signal transmission for TV and broadband
- Durable construction for long-term use

HDMI Coupler



245-KJC/FF/180

[Wall Plates](#)

[P59](#)



Item #	Description
028-WP/1XF81	TV Wall Plate with one F81 Connector, White
028-WP/F81R11	Wall Plate with F-81 + RJ11 or RJ14 Connectors, Standard Single-Gang, White
245-KJC/FF/180	HDMI Keystone Coupler F/F (Female to Female)

Coax Connectors & Keystone Inserts

Coax Connectors



Item #	Description
083-1041/CP/S	F-Type Male Connector, Compression Type for RG6, Standard Shielded, 100 per bag
083-1042/CP/Q	F-Type Male Connector, Compression Type, for RG6 Quad Shielded, 100 per bag
083-1042/Q	F-Type Male Connector, Twist-On Type, for RG6 Quad Shielded, 100 per bag
083-1043/CP/BNC	BNC Compression Type Connector for RG59, 100 per bag
083-1044/CPRG11	Compression Type Connector for RG11 Dual and Quad Shield, 50 per bag

RG6 STANDARD SHIELD

083-1041/CP/S



RG6 QUAD SHIELD

083-1042/CP/Q



RG59

083-1043/CP/BNC



083-1042/Q



RG11

083-1044/CPRG11



Strong connections. Clear signals.

Designed for RG59, RG6, and RG11 coax cables, F-type connectors provide a secure, low-loss connection for video, satellite, cable TV, and broadband applications. Available in compression, crimp, and twist-on styles for a perfect fit in any installation



Keystone Inserts



037-317AL

037-318IV

037-320BK



037-321GY

037-319WH

037-319WH/3G



037-329GY

037-325AL

037-326IV

037-327WH

037-328BK

Item #	Description
037-317AL	F Keystone Insert, Nickel Plated, Almond
037-318IV	F Keystone Insert, Nickel Plated, Ivory
037-319WH	F Keystone Insert, Nickel Plated, White
037-319WH/3G	F-81 Keystone Insert, Nickel Plated, 3.0 GHz Rated, Blue Insulator, White
037-320BK	F Keystone Insert, Nickel Plated, Black
037-321GY	F Keystone Insert, Nickel Plated, Gray
037-325AL	Blank Keystone Insert, Almond
037-326IV	Blank Keystone Insert, Ivory
037-327WH	Blank Keystone Insert, White
037-328BK	Blank Keystone Insert, Black
037-329GY	Blank Keystone Insert, Gray

[Blank Patch Panels](#)

P66

Modular Plugs

FEED-THROUGH

CAT6A



012-025/EZF-100



012-026/EZF-100

CAT6



012-023/EZF-100

CAT5E



011-018/EZF-100



011-019/EZF-100

NON FEED-THROUGH

CAT6A



012-027SLM-100



012-021-100

CAT6



012-022-100



CAT5E



011-020G-100



011-017-100



011-016-100

CAT3



009-007/64R-100



009-008/66R-100



009-1024/44R



Item #	Description
012-027SLM-100	CAT6A Slim Non-Feed-Through RJ45 Modular Plug, 3-Prong — Designed for 173 Series Cable, 100 per bag
012-026/EZF-100	CAT6A Feed-Through RJ45 Modular Plug, Shielded, 100 per bag
012-025/EZF-100	CAT6A Feed-Through RJ45 Modular Plug, Unshielded, 100 per bag
012-023/EZF-100	CAT6 Feed-Through RJ45 Modular Plug — For Solid and Stranded Cable, 100 per bag
012-022-100	CAT6 Non-Feed-Through RJ45 Modular Plug, 100 per bag
012-021-100	CAT6/CAT6A Shielded RJ45 Modular Plug — For Solid Cable, Includes Load Bar, 100 per bag
011-020G-100	CAT5E Shielded RJ45 Modular Plug with Grounding Hook — For Drain Wire, 100 per bag
011-019/EZF-100	CAT5E Feed-Through RJ45 Shielded Modular Plug — For Solid and Stranded Cable, 100 per bag
011-018/EZF-100	CAT5E Feed-Through RJ45 Modular Plug — For Solid and Stranded Cable, 100 per bag
011-017-100	CAT5E Shielded Plug, RJ45, 8P/8C, 3 Prong, for Round Solid/Stranded Cable, 100 per bag
011-016-100	CAT5E Plug, RJ45, 8P/8C, 3 Prong, for Round Solid/Stranded Cable, 100 per bag
009-1024/44R-100	CAT3 Plug, RJ22 Modular Plug For telephone handset cord, 100 per bag
009-008/66R-100	CAT3 RJ12 Modular Plug (6C) — For Round Solid and Stranded Telephone Cable, 100 per bag
009-007/64R-100	CAT3 RJ11 Modular Plug (4C) — For Round Solid and Stranded Telephone Cable, 100 per bag

Slip-On Boots

RJ45 Slip-on Boots CAT6A, CAT6



016-047GR-50



016-045BK-50



016-046BL-50



016-048GY-50



016-051RD-50



016-052WH-50



016-053YL-50

Features:

- 10 mm PVC slip-on-boot
- Fits CAT6 F/UTP, CAT6A UTP, CAT6A F/UTP cable
- Fits all Vertical Cable RJ45 plugs
- Provides strain relief and protects RJ45 plugs from snags



50-Pack

Item #	Description
016-045BK-50	Slip-On Boot, for CAT6/CAT6A, Black
016-046BL-50	Slip-On Boot, for CAT6/CAT6A, Blue
016-048GY-50	Slip-On Boot, for CAT6/CAT6A, Gray
016-047GR-50	Slip-On Boot, for CAT6/CAT6A, Green
016-051RD-50	Slip-On Boot, for CAT6/CAT6A, Red
016-052WH-50	Slip-On Boot, for CAT6/CAT6A, White
016-053YL-50	Slip-On Boot, for CAT6/CAT6A, Yellow

RJ45 Slip-on Boots CAT6, CAT5E



015-031GR-10



015-027BK-10



015-029BL-10



015-033GY-10



015-035OR-10



015-037RD-10



015-039WH-10



015-041YL-10



015-045VT-10

Features:

- 6.5 mm PVC slip-on-boot
- Fits CAT3 UTP, CAT5E UTP, CAT5E F/UTP, CAT6 UTP cable
- Fits all Vertical Cable RJ45 plugs except the 012-021-100 and 012-026-100 (CAT6A Shielded Plugs with the wing)
- Provides strain relief and prevents plugs from snagging



10-Pack

Item #	Description
015-027BK-10	Slip-On Boot, for CAT5E/CAT6, Black
015-029BL-10	Slip-On Boot, for CAT5E/CAT6, Blue
015-033GY-10	Slip-On Boot, for CAT5E/CAT6, Gray
015-031GR-10	Slip-On Boot, for CAT5E/CAT6, Green
015-035OR-10	Slip-On Boot, for CAT5E/CAT6, Orange
015-037RD-10	Slip-On Boot, for CAT5E/CAT6, Red
015-039WH-10	Slip-On Boot, for CAT5E/CAT6, White
015-041YL-10	Slip-On Boot, for CAT5E/CAT6, Yellow
015-045VT-10	Slip-On Boot, for CAT5E/CAT6, Violet

Slip-on Boot for 012-027SLM-100

Features:

- Compatible with RJ45 slim plugs (012-027SLM-100)
- Provides strain relief and protects RJ45 plugs from dust and snags
- 4 mm transparent PVC slip-on-boot
- 100 per bag



100-Pack



Item #	Description
017-067TR-100	CAT6A RJ45 Slip-on Boot for 012-027SLM-100 Plugs (Transparent)

Tools & Testers

Punch Down Tools

- Tools feature wide, comfortable handles
- Durable, long-lasting hardware



Item #	Description
078-2150	I-Punch Tool for Vertical Cable V-Max Keystone Jacks
078-2155/S	I-Punch Tool for Shielded Keystone Jacks
078-1025	Impact Punch Down Tool with 110/88/66 Blades
078-1025/B	110 Type Blade for 078-1025 Impact Punch Down Tool
078-1025/B210	Krone Type Blade for 078-1025 Impact Punch Down Tool

[Keystone Jacks](#)

[P54](#)

[RJ45 Plugs](#)

[P78](#)



078-2150

078-2155/S

078-1025

078-1025/B210

078-1025/B

Crimping & Compression Tools

- Tools feature wide, comfortable handles
- Durable, long-lasting hardware



Item #	Description
078-1017	Crimping Tool for RJ11, RJ12, RJ45, Built-in Cutting-Stripping Blade
078-2154/EZC/S	Tool for CAT6A Easy Feed RJ45 Modular Plug for Shielded Cable
078-2152/EZC	Crimping Tool for Feed-through Plugs
078-2153/B	Replacement Blade for EZ Feed Crimping Tool
078-1018	Compression Tool, Terminates RCA, BNC, RG59, RG6



078-1017

078-2154/EZC/S

078-2152/EZC

078-2153/B

078-1018

Cutters & Strippers



Item #	Description
078-1023	Miniature 5 Adjustable Stripper/Cutter/Punch Down Tool, 10-30 AWG Wire, UTP/STP Round Cable
078-1024	Cable Cutter, Cuts Wire up to 0.42/10.7mm
078-1256	Coaxial Stripper, Thumbwind-Style, Adjustable Blade, For RG59 & RG6



078-1023

078-1024

078-1256

I-PUNCH TOOL by

VC



**10,000-CUT
BLADE STRENGTH**

**BUILT-IN
CABLE CUTTER**

**FAST & CLEAN
TERMINATIONS**

**DESIGNED
EXCLUSIVELY
FOR VC V-MAX
KEYSTONE JACKS**



**DUAL RATCHETING
MECHANISM**

**HEAVY-DUTY
CONSTRUCTION**

**INTEGRATED
HANDLE LOCK**



PART NUMBER

078-2150

**IN STOCK
AND READY TO
SHIP**



**SHIPS FROM TEXAS
CUT TO YOUR LENGTH
NO CUT FEES**

2.

OPTICAL FIBER



OPTICAL FIBER BULK CABLE - OSP

Outside Plant Loose Tube

Non-Armored OS2 (Singlemode)

12-Fiber	281-NAR012/BK	
24-fiber	281-NAR024/BK	261-11902A
48-fiber	281-NAR048/BK	261-11906A
72-fiber	281-NAR072/BK	261-11908A
96-fiber	281-NAR096/BK	
144-fiber	281-NAR144/BK	261-11912A

Armored OS2 (Singlemode)

12-Fiber	282-ARM012/BK	
24-fiber	282-ARM024/BK	261-11918B
36-fiber	282-ARM036/BK	261-11920B
48-fiber	282-ARM048/BK	261-11922B
72-fiber	282-ARM072/BK	261-11924B
96-fiber	282-ARM096/BK	261-11926B
144-fiber	282-ARM144/BK	261-11928B

SPECIAL ORDER

LOOSE TUBE DROP CABLES - OSP

Loose tube fiber drop cable is the "last mile" in FTTH/FTTx deployments. These are tough, flexible, and built for aerial, duct, or direct burial installations

2 7 7 - W1



Fiber Type

M1 OM1

M2 OM2

M3 OM3

M4 OM4

SM OS2 G652D

S1 G657.A1

S2 G657.B2

Fiber Count

XXX

00# - ###

Cable Construction

FDND

Flat Drop Non-Toneable Dry

FDNG

Flat Drop Non-Toneable Gel-Filled

FDTD

Flat Drop Toneable Dry

FDTG

Flat Drop Toneable Gel-Filled

1JNA

Single Jacket/No Armor

1J1A

Single Jacket/Single Armor

2J1A

Dual Jacket/Single Armor

2J2A

Dual Jacket/Double Armor

3J2A

Triple Jacket/Double Armor

2JNA

Dual Jacket/Non Armored

The Vertical Cable part number table includes key attributes related to cable design and optical performance. Please note that not all configurations shown below are available. Refer to product-specific data sheets or consult your sales representative to confirm valid options


Outside Plant Loose Tube Cables - Non-Armored

Features:

- All-dry (Gel-free)
- Loose Tube
- All-Dielectric
- Non-Armored
- Color-Coded Fibers
- UV Resistant
- Water Blocking

Applications:

- Outside Plant Installations
- Duct
- Aerial Lashed
- Air Blown Fiber

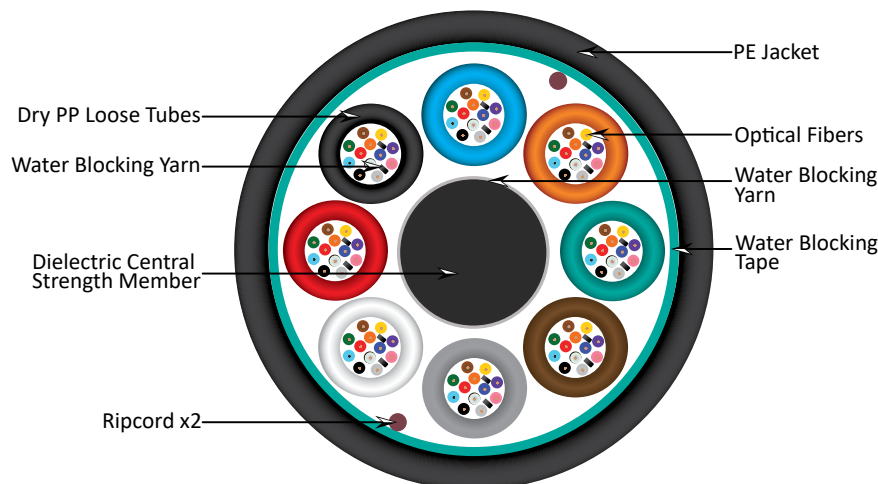


Outside Plant Loose Tube Cables - Armored

Features:

- All-dry (Gel-free)
- Flexible Loose Tube
- Corrugated Steel Armor
- Color-Coded Fibers
- Water Blocking
- UV Resistant
- Crush Resistant
- Impact Resistant
- Aramid ripcords allow for easy stripping

Applications:

- Outside Plant Installations
- Direct Burial
- Duct
- Aerial Lashed

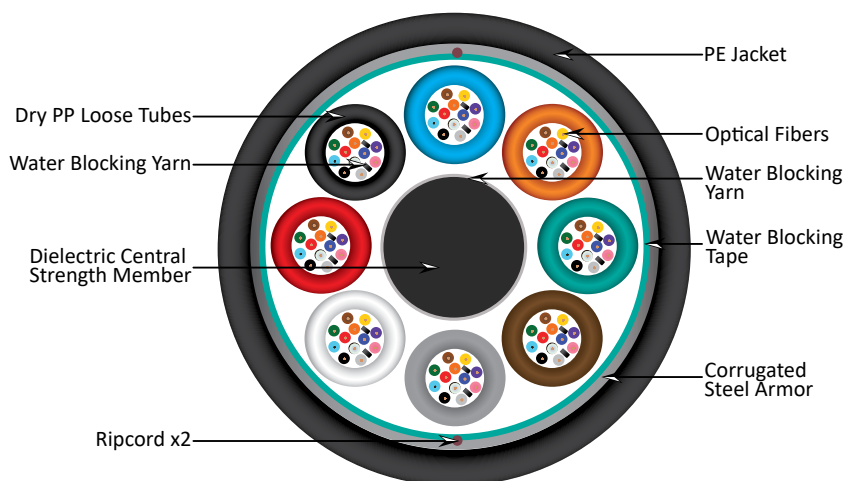

OPTICAL FIBER BULK CABLE - ISP

Indoor/Outdoor Tight Buffer (Distribution Cable) **Non-Armored**

OM1 (Multimode)	6-fiber 12-Fiber	271-1006/P/BK 271-1012/P/BK
OM3 (Multimode)	6-fiber 12-Fiber 24-fiber	273-3006/P/BK 273-3012/P/BK 273-3024/P/BK
OM4 (Multimode)	6-fiber 12-Fiber 24-fiber	274-4006/P/BK 261-13404P 274-4012/P/BK 261-13408P 274-4024/P/BK
OS2 (Singlemode)	6-fiber 12-Fiber 24-fiber	275-SM006/P/BK 275-SM012/P/BK 275-SM024/P/BK

Indoor/Outdoor Tight Buffer (Distribution Cable) **Armored**

OM3 (Multimode)	6-fiber 12-Fiber 24-fiber	273-A5006/P/BK 273-A5012/P/BK 273-A5024/P/BK
OM4 (Multimode)	6-fiber 12-Fiber 24-fiber	274-A6006/P/BK 274-A6012/P/BK 274-A6024/P/BK
OS2 (Singlemode)	6-fiber 12-Fiber 24-fiber	275-ASM06/P/BK 275-ASM06/R/YL (Riser) 275-ASM12/P/BK 275-ASM24/P/BK

SPECIAL ORDER

ADSS (All-Dielectric Self-Supporting) cable is available as a special order. Ask your account manager for more details

2 7 6 – W1							–				
Fiber Type	Fiber Count	Water Blocking	Span Length	NESC Loading		Construction					
M1 OM1	XXX	G Gel Filled	S Short Span > 300'	L Light	S Single Jacket						
M2 OM2	00# – ###	T Tape	I Intermediate 300' - 1000'	M Medium	D Double Jacket						
M3 OM3			L Long 1000' +	H Heavy							
M4 OM4											
SM OS2 G652D											
S1 G657.A1											
S2 G657.B2											

The Vertical Cable part number table includes key attributes related to cable design and optical performance. Please note that not all configurations shown below are available. Refer to product-specific data sheets or consult your sales representative to confirm valid options

Optical Fiber Cable


Indoor/Outdoor Tight Buffer - Non-Armored - Plenum

Features:

- Tight buffered construction
- Singlemode (OS2) or Multimode (OM1, OM3, OM4)
- Color-coded for easy identification
- OFNP Rated (Plenum Rated)
- Rugged and high performance
- Small size and light weight for limited conduit space
- Suitable for lashed aerial, duct, underground conduit and indoor plenum applications
- RoHS compliant

Applications:

- FTTx Networks
- Indoor/Outdoor
- Backbone & computer room cabling

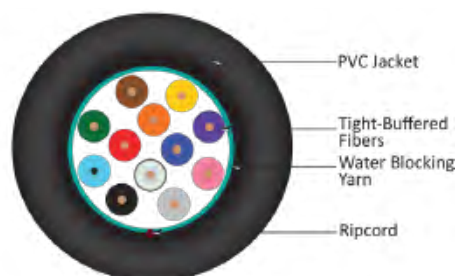


Indoor/Outdoor Tight Buffer - Armored - Plenum

Features:

- Tight buffered construction
- Singlemode (OS2) or Multimode (OM1, OM3, OM4)
- Color-coded for easy identification
- OFCP Rated
- Rugged and high performance
- Crush resistant
- Small size and light weight for limited conduit space
- Eliminates the need for inner duct or conduit thus saving installation time

Applications:


- FTTx deployments
- Suitable for indoor or outdoor use
- Backbone and computer room cabling
- Local area networks (LAN)
- High-security environments
- Inter-building connections

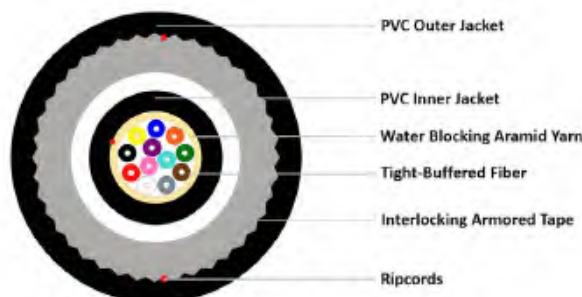

IndoorTight Buffer Cable - Armored - Riser

Features:

- Tight-buffered construction
- OS2 singlemode performance
- Aluminum interlocking armor for added protection
- OFCR riser-rated for vertical installations
- Crush-resistant, rugged design
- Color-coded fibers for easy identification
- Compact, lightweight for tight spaces
- Eliminates need for inner duct or conduit
- RoHS compliant, UL-Listed

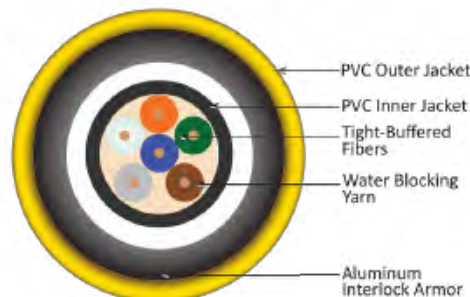



2.1

FIBER CONNECTIVITY

Work Area Surface-Mount Boxes

Wall Outlets and Surface-Mount Boxes - Keystone Modules

Black Bezels

BLUE

GREEN

AQUA

HEATHER VIOLET



SC SX



264-KMB01-3Z-BK



264-KMB01-3Y-BK



264-KMB01-3C-BK




264-KMB01-3D-BK

LC DX



264-KMB01-4Z-BK



264-KMB01-4Y-BK



264-KMB01-4C-BK



264-KMB01-4D-BK

Features:

- Supports simplex and duplex fiber connections
- Precision zirconia ceramic sleeves for reliable alignment
- Fits standard keystone faceplates and surface-mount boxes
- Durable ABS housing (UL 94 V-0 rated)

White Bezels

BLUE

GREEN

AQUA

HEATHER VIOLET

SC SX



264-KMB01-3Z-WH



264-KMB01-3Y-WH



264-KMB01-3C-WH



264-KMB01-3D-WH

LC DX



264-KMB01-4Z-WH



264-KMB01-4Y-WH



264-KMB01-4C-WH



264-KMB01-4D-WH

Keystone Modules - Shuttered

BLUE

GREEN

AQUA



SC SX



264-KMB03-3Z-WH



264-KMB03-3Y-WH



264-KMB03-3C-WH



LC DX



264-KMB03-4Z-WH



264-KMB03-4Y-WH



264-KMB03-4C-WH



Features:

- Simplex and duplex fiber compatibility
- Built-in shutter for dust protection and safety
- Zirconia ceramic sleeves for low insertion loss
- Compatible with standard keystone mounting systems
- UL 94 V-0 rated ABS construction

Fiber Done Right, Every Time.

Related products:

Wall Plates **P59**



LGX Blank Keystone Adapter Plate **P100**



Surface mount boxes **P62**



Patch Panels **P68**



Surface-Mount Box

Illustration of a loaded box with one adapter



Illustration of a box loaded with two adapters



Blank (as delivered)



Zip ties and wood screws are included



Item #	Description
268-SMB12-2BW00	Work-Area Surface-Mount Box, 2-Position, Blank

Features:

- Four slots for fusion splice protection sleeves
- Clear plastic label holder with adhesive mounting (included)
- W: 70 mm (2.75 in), H: 120 mm (4.7 in), D: 24 mm (1 in)
- Two wood screws (included)

Fiber adapters

P102

Rack-Mount Panels and Cable Management Bars

LGX Adapter Plate Panels



266-PMD01-1A3A

Non-removable **cable manager**



266-PMD01-2A3A

Cable Manager not included
Can take front and rear cable management bars

Item #	Description
266-PMD01-1A3A	Optical Fiber Rack-Mount Panel, LGX, Three-Position, 1 RMU
266-PMD01-2A3A	Optical Fiber Rack-Mount Panel, LGX, Three-Position, 1 RMU



Label your rack!
Use Zero-U panels to label your rack properly



266-LBL00-A1A4A

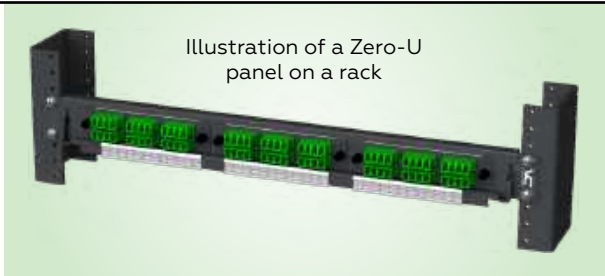


Illustration of a Zero-U panel on a rack

Cable Management Bars




266-CFM00-2A3



266-CFM00-2A4



266-CFM00-2B3

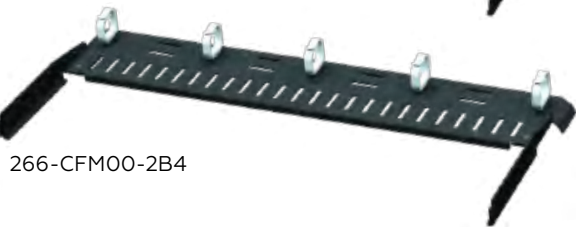

266-CFM00-2B4

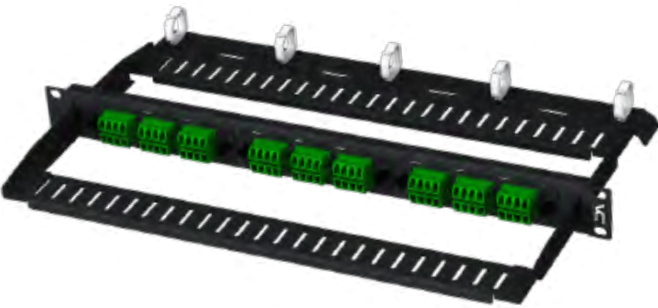


Illustration of LGX panel loaded with adapter plates and two cable management bars attached

Item #	Description
266-CFM00-2A3	Cable Management Bar, General Purpose, 3-in Depth
266-CFM00-2A4	Cable Management Bar, General Purpose, 4-in Depth
266-CFM00-2B3	Cable Management Bar, Optical Fiber, 3-in Depth
266-CFM00-2B4	Cable Management Bar, Optical Fiber, 4-in Depth



Rack-Mount Enclosures

Rack-Mount Optical Fiber Enclosures - Standard Series


Illustration of Loaded Enclosures with LGX Adapter Plates			
	267-RES01-1C1	267-RES01-1F2	267-RES01-1L4
	3	6	12
	up to 72	up to 144	up to 288
	2 × 24 fibers	6 × 24 fibers	12 × 24 fibers

Item #	Description
267-RES01-1C1	Optical Fiber Rack-Mount Enclosure, Standard-Series, LGX, Three-Position, 1 RMU
267-RES01-1F2	Optical Fiber Rack-Mount Enclosure, Standard-Series, LGX, Six-Position, 2 RMU
267-RES01-1L4	Optical Fiber Rack-Mount Enclosure, Standard-Series, LGX, Twelve-Position, 4 RMU



Rack-Mount Optical Fiber Enclosures - Budget Series

Illustration of a load-ed enclosure with LGX adapter plates and splicing trays	
	267-REB01-1C1
	3
	up to 72
	2 × 24 fibers

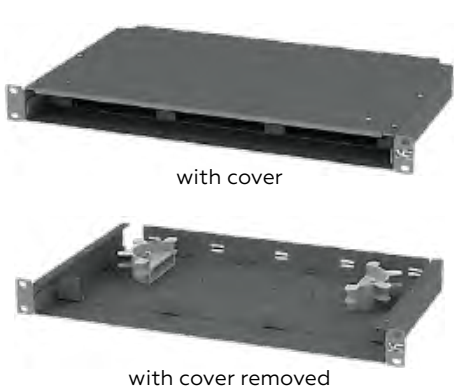

Item #	Description
267-REB01-1C1	Optical Fiber Rack-Mount Enclosure, Budget-Series, LGX, Three-Position, 1 RMU



Wall-Mount Enclosures

Wall-Mount Optical Fiber Enclosures

Item #	Description
268-STD01-1B1	Optical Fiber Wall-Mount Enclosure, Standard-Series, Single-Door, LGX, Two-Position , Latch
268-STD01-1D1	Optical Fiber Wall-Mount Enclosure, Standard-Series, Single-Door, LGX, Four-Position , Latch



268-STD01-1B1



As delivered



Illustration of a box loaded with cas-settes and LGX adapter plates up to 48 fibers



Included:



268-STD01-1D1



As delivered



Illustration of a box loaded with cas-settes and LGX adapter plates up to 96 fibers

Item #	Description
268-STD02-1B12	Optical Fiber Wall-Mount Enclosure, Standard-Series, Dual-Door, LGX, Two-Position , Lock/Latch
268-STD02-1D12	Optical Fiber Wall-Mount Enclosure, Standard-Series, Dual-Door, LGX, Four-Position , Lock/Latch



268-STD02-1B12



As delivered



Illustration of a box loaded with LGX adapter plates up to 48 fibers



Included:



268-STD02-1D12



As delivered



Illustration of a box loaded with LGX adapter plates up to 96 fibers





THE FIBER JOURNEY

FROM CENTRAL OFFICE
TO EVERY CONNECTION

Reliable. Scalable. Future-Ready.

4

DROP TO PREMISES / LAST MILE

Reliable connection that delivers high-speed service to end user.

3

ACCESS POINTS / TAP SITES / PEDESTALS

Strategic access points for efficient splicing, distribution and network expansion.

2

ROUTE DEPLOYMENT (UNDERGROUND / AERIAL / CONDUIT)

Secure and scalable routing solutions for long-distance fiber transport.

1

CENTRAL OFFICE / BACKBONE START

High-capacity backbone infrastructure that powers the network.



WALL-MOUNT BOXES

LGX Adapter Plate Enclosures

Item #	Description
268-EZX01-1A1L1	EZX Series – Optical Fiber Wall-Mount Enclosure, LGX, Blank Door, Latch
268-EZV01-1A1L1	EZV Series – Optical Fiber Wall-Mount Enclosure, LGX, Viewport Door, Latch



268-EZX (Blank door)



Features:

- LGX adapter plate format
- Single door, cam latch
- Left- or right-hand independent mounting
- Cable management: cable entry port adapters, cable anchor points (bridge lances), set of cable ties and wraps

268-EZV (Viewport door)



Latch



Example of a loaded box with LGX adapter plate (P69)



Included:

- Blank and Grommet cable entry adapters
- Label holder
- Cam latch
- Management spools



Example of a loaded box with LGX adapter plate (P69)



ACCESSORIES – Cable entry adapters for EZX and EZV Series

“L” type



268-ACC01-1A0
included with
enclosure by default



268-ACC01-1B1
included with
enclosure by default



268-ACC01-1C1



268-ACC01-1D1



268-ACC01-1E1



268-ACC01-1F1



268-ACC01-1G1

“M” type



268-ACC01-2A0



268-ACC01-2B1



268-ACC01-2C1



268-ACC01-2D1



268-ACC01-2E1



268-ACC01-2F2



268-ACC01-2G2



268-ACC01-2H1



268-ACC01-2I1



268-ACC01-2J1

EZX and EZV enclosures are supplied with one blank and one grommet cable entry adapter brackets. Cable entry adapter brackets may be ordered separately, adding flexibility in creating configurations per project requirements:

OTHER ACCESSORIES - EZX and EZV Series

Item #	Description
268-ACC03-11-00	Splicing Stage for 268-EZX/EZV Series
268-ACC03-12-00	Splicing Stage for 268-EZX/EZV Series, Two Splice Holders
265-HLD01-2B-00	Optical fiber splice holder, adhesive mounting, twelve fibers (no sleeves)
265-SLV01-3A-1H	Optical fiber splice protection sleeve, 2.5 mm × 40 mm, pack of 100
265-SLV01-3B-1H	Optical fiber splice protection sleeve, 2.5 mm × 60 mm, pack of 100
268-EZLOCK	Cam Lock for 268-EZX/EZV Series



Fiber Management Stage
268-ACC03-11-00



Lock
268-EZLOCK



40-mm sleeves
265-SLV01-3A-1H



60-mm sleeves
265-SLV01-3B-1H



Splice Holder
265-HLD01-2B-00

Adapter Plate Wall-Mount Box



LGX Adapter plates are not included

Features:

- One LGX adapter plate
- Up to 24 optical fibers
- Up to two 12-fiber splice holders
- W: 6.3 in, H: 1.6 in, D: 1.3 in
- 7 oz



Item #	Description
268-SMB01-1A1	Optical Fiber Surface-Mount Box, Standard-Series, LGX, One-Position

Included:
Box with cover × 1; Panel fastener sets for cover latching × 2, nylon cable ties × 2

Connectivity Node - Wall or DIN-Rail Mount Options



Blank and Grommet cable entry adapters are included

Features:

- One LGX adapter plate
- 1 or 2 splice holders, 12 fibers per holder, 24 fibers total max
- 1 or 2 cable entry point adapters (see accessories)
- Cable management: cable anchor points (bridge lances), fiber/splice management stage, removable, set of cable ties
- W: 1.2 in [2 DU], H: 5.9 in, D: 5.5 in
- 8.5 oz



DIN-Rail Clip
251-DCN-DINRAIL

Illustration of DIN-Rail Mount Option with LGX adapter plate and splice holders installed

Item #	Description
251-DCN01-B1B05	Wall-Mount Connectivity Node

Included:
Base × 1; Cover × 1; FM stage × 1; Cable Tie × 2, Blank and Grommet cable entry adapters

DIN-Rail Modular Cassettes

EZ Mount Series DIN-Rail Cassette



Blank and Grommet cable entry adapters are included



CABLING
INNOVATORS
AWARDS
GOLD HONOREE



LGX Adapter plates are not included

[LGX Adapter plates](#)

P100



Features:

- One LGX adapter plate
- DIN-rail mounting only
- 1 or 2 splice holders, 12 fibers per holder, 24 fibers total
- Cable management: cable anchor points (bridge lances), fiber/splice management stage, removable, set of cable ties and wraps
- W: 1.4 in [2 DU], H: 6.7 in, D: 6 in
- 12.5 oz

Item

Description

268-EZM01-1A-05 DIN-Rail Modular Cassette, EZ Mount Series

Included:

Bay × 1; Cassette × 1; FM stage × 1; DIN-Rail Clip × 1;
Cable Tie × 2, Blank and Grommet cable entry adapters

ACCESSORIES – Cable Entry Adapters

251-DCN01 and 268-EZM Series use the same cable entry adapters



268-EZM01-1A00



268-EZM01-1A01



268-EZM01-1A02



268-EZM01-1A03



268-EZM01-1A04



268-EZM01-1A05



268-EZM01-1A06

* 268-EZM01-1A05 due to its grommet size can be used only in the top position



Splice holder
265-HLD02-2B



Sleeves, 40 mm
265-SLV01-3A-1H



Sleeves, 60 mm
265-SLV01-3B-1H



DIN-Rail Clip
251-DCN-DINRAIL


LGX Adapter Plates

COPPER BULK CABLE

OPTICAL FIBER BULK CABLE

CABLE MANAGEMENT & RACKS

INDUSTRIAL & HARSH ENVIRONMENTS

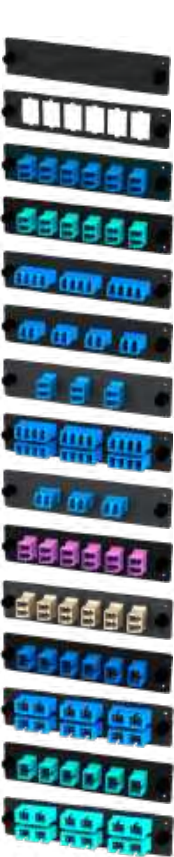

Item #	Description
264-MAP00-0000	Optical Fiber Adapter Plate LGX Blank (Filler)
264-MAP01-1A06	LGX Adapter Plate for Keystone inserts Blank
264-LAP04-1B6Z1	12F/6P LC/DX SM/UPC BL NF LGX
264-LAP04-1B6C1	12F/6P LC/DX MM/OM3 AQ NF LGX
264-LAP04-1C3Z1	12F/3P LC/QX SM/UPC BL NF LGX
264-LAP04-1B4Z1	8F/4P LC/DX SM/UPC BL NF LGX
264-LAP04-TB3Z1	6F/3P LC/DX SM/UPC BL NF VERT
264-LAP04-2C6Z1	24F/6P LC/QX SM/UPC BL NF LGX
264-LAP04-LB3Z1	6F/3P LC/DX SM/UPC BL NF HORZN
264-LAP04-1B6D1	12F/6P LC/DX MM/OM4 HV NF LGX
264-LAP04-1B6A1	12F/6P LC/DX MM/OM1 BG NF LGX
264-LAP03-1A8Z1	8F/8P SC/SX SM/UPC BL NF LGX
264-LAP03-2B6Z1	12F/6P SC/DX SM/UPC BL NF LGX
264-LAP03-1A8C1	8F/8P SC/SX MM/OM3 AQ NF LGX
264-LAP03-2B6C1	12F/6P SC/DX MM/OM3 AQ NF LGX

Features:

- LGX-compatible form factor for universal fit
- Durable 1.5 mm aluminum construction with black powder coating
- Available in singlemode and multimode configurations
- Precision cutouts ensure secure adapter alignment
- Meets Telcordia GR-326-CORE standards



NEED SOMETHING ELSE? USE CONFIGURATOR:

264-LAP0

-

Connector

3 SC

4 LC

Position*

1 1-Row

2 2-Row

T Transversal

L Lateral

Footprint**

A SX

B DX

C QD

Number of Positions

1 1-Position

2 2-Position

3 3-Position

4 4-Position

5 6-Position

Adapter Color

A Beige

B Black

C Aqua

D Violet


Y Green

Z Blue

Adapter Mount***

1 NF (Flangeless)

2 MF (Flanged)

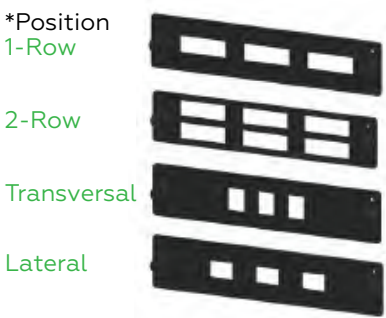

Adapter Plates with Label ID CONFIGURATOR:

264-LAB0-I1

Connector

3 SC

4 LC

Footprint**

A SX

B DX

C QD

Number of Positions

3 3-Position

4 4-Position

Adapter Color

A Beige

B Black

C Aqua

D Violet

Y Green

Z Blue



264-LAB04-IC3Z1



264-LAB04-IB4C1

FC & ST Bulkhead Adapters CONFIGURATOR:

264-LAD0-1A01

Connector

1 FC

2 ST

Number of Positions

06 6-Position

08 8-Position

12 12-Position



264-LAD01-1A0801



264-LAD02-1A1201

MPO Adapter Plates CONFIGURATOR:

264-LAM05-1

Orientation*

M KU-KD

N KU-KU

S K-SW

Number of Positions

06 6-Position

08 8-Position

Adapter Color

B Black

C Aqua

D Violet

Y Green

Z Blue

Adapter Mount

1 NF (Flangeless)

2 MF (Flanged)



264-LAM5-1M06B2



264-LAM05-1M06C1

*Orientation
KU-KD = Key up - Key Down
KU-KU = Key up - Key Up
KU-SW = Key up - Switchable

Optical Fiber Adapters

LC Adapters:

	Flangeless		Flanged	
	SX	QX	DX	QX
OM1	263-OFA04-2A1BG 	263-OFA04-3A1BG 	263-OFA04-2A2BG 	263-OFA04-3A2BG 
	263-OFA04-2A1AQ 	263-OFA04-3A1AQ 	263-OFA04-2A2AQ 	263-OFA04-3A2AQ 
OM3	263-OFA04-2A1HV 	263-OFA04-3A1HV 	263-OFA04-2A2HV 	263-OFA04-3A2HV 
	263-OFA04-2A1BL 	263-OFA04-3A1BL 	263-OFA04-2A2BL 	263-OFA04-3A2BL 
OM4	263-OFA04-2A1GR 	263-OFA04-3A1GR 	263-OFA04-2A2GR 	263-OFA04-3A2GR 
SM UPC				
SM APC				

Connector Size

SX (Simplex)



DX (Duplex)



QD (Quadruplex)



Flanged vs. Flangeless

When to use each:

Use Flanged when you want added mechanical strength—like in high-traffic racks, industrial settings, or where shake, rattle, and roll are real.

Flanges with screw holes (screw mounting)

Use Flangeless for a more streamlined install—great for modular data centers, clean environments, or any time you want faster installs and a sleeker look.

Snap-in or retention within LGX panel

Features:

- Telcordia GR-326-CORE
- Split Zirconia ceramic sleeves
- Regulation (EC) No 1907/2006 (REACH); Directive 2011/65/EU Am. 2015/863/EU (RoHS2). Plastic parts: ANSI/UL 94 V-0.

SC Adapters:

	Flangeless		Flanged	
	SX	DX	SX	DX
OM1	263-OFA03-1A1BG 	263-OFA03-2A1BG 	263-OFA03-1A2BG 	263-OFA03-2A2BG 
	263-OFA03-1A1AQ 	263-OFA03-2A1AQ 	263-OFA03-1A2AQ 	263-OFA03-2A2AQ 
OM3	263-OFA03-1A1HV 	263-OFA03-2A1HV 	263-OFA03-1A2HV 	263-OFA03-2A2HV 
	263-OFA03-1A1BL 	263-OFA03-2A1BL 	263-OFA03-1A2BL 	263-OFA03-2A2BL 
OM4	263-OFA03-1A1GR 	263-OFA03-2A1GR 	263-OFA03-1A2GR 	263-OFA03-2A2GR 
SM UPC				
SM APC				

Color code reference (per ANSI/TIA-568.3):

- BEIGE: adapter is intended to be used for connecting cabling based on OM1 fiber
- AQUA: adapter is intended to be used for connecting cabling based on OM3 fiber
- VIOLET: adapter is intended to be used for connecting cabling based on OM4 fiber
- BLUE: adapter is intended to be used for connecting cabling based on SM fiber and UPC plugs
- GREEN: adapter is intended to be used for connecting cabling based on SM fiber and APC plugs



KNOW YOUR OPTICAL FIBER ADAPTERS FC, ST, MPO, LC, SC

FC Optical Fiber Adapters

Ferrule Connector (sometimes "Fixed Connector")

Main Use: Telecom, datacom, measurement equipment.

ST Optical Fiber Adapters

Straight Tip

Main Use: Networking, CCTV fiber, campus environments.

MPO Optical Fiber Adapters

Multi-Fiber Push-On

Main Use: High-density backbone cabling, data centers.

FC Adapters:

MM / SM

263-OFAFC-2RD



ST Adapters:

MM / SM

263-OFAST-2RD



Multimode and Singlemode

SC Adapter

Subscriber Connector (also "Square Connector" or "Standard Connector")

Main Use: Telecom room, GPON/ FTTH setups, CATV systems, General-purpose fiber connections.

LC Adapters

Lucent Connector (sometimes "Little Connector")

Main Use: Data centers, LAN/WAN connections, High-density fiber patching environments.

MPO Adapters:

Flangeless

263-OFA05-1B1BK



Flanged

263-OFA05-1B2BK



263-OFA05-1A1AQ

OM3



263-OFA05-1A1BL

SM
UPC



263-OFA05-1A1GR

SM
APC



Dust-proof plugs (with integral key in Key-Switchable adapters).

Products by Vertical Cable You Can Use Fiber Adapters with:


[OSP Outlet Module
Flangeless Adapters](#)

P145



[OSP Transition Boxes
Flanged Adapters](#)

P114

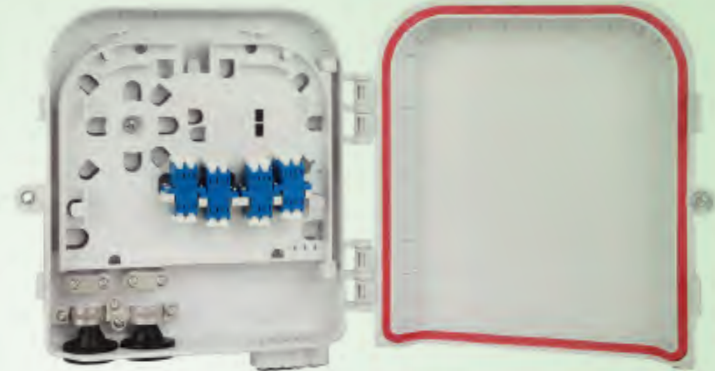


[Box loaded with two adapters
Flangeless Adapters](#)

P91



[LGX Adapter Plates
Any adapters](#)

P67

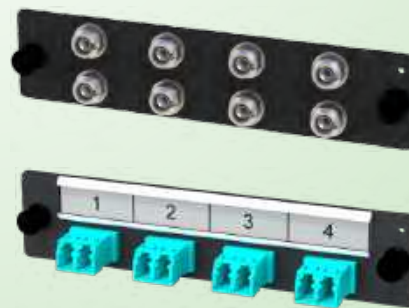

Modular Connector Assemblies

LGX Cassettes – MPO Pre-Connectorized Solution



Included:

- 1 × base with cover;
- 1 × front bracket with installed adapters;
- 1 × wiring harness matching connector type and fiber count;
- 1 × rear cable entry adapter plate with MPO adapter matching fiber type and count;
- 2 × blank rear adapter plates.

Features:

- Mounting: Standard LGX footprint and mechanism
- Low loss – MTP®-12 pinned (US Conec); Standard loss – MPO-12 pinned (SENKO)
- W: 130 mm (5.12 in), H: 29 mm (1.14 in), D: 130 mm - 145 mm (5.12 in - 5.7 in)
- Telcordia GR-326-CORE compatible

Item #	Description
264-MCA0312-3AAS1	MPO Pre-connectorized LGX cassette LC Multimode OM3, Standard Loss, Type-A, 1x MPO, 12-fiber
264-MCA0412-3AAS1	MPO Pre-connectorized LGX cassette LC Multimode OM4, Standard Loss, Type-A, 1x MPO, 12-fiber
264-MCA0U12-3AAS2	MPO Pre-connectorized LGX cassette LC Singlemode UPC, Standard Loss, Type-A, 1x MPO, 12-fiber
264-MCA0312-2AAS1	MPO Pre-connectorized LGX cassette SC Multimode OM3, Standard Loss, Type-A, 1x MPO, 12-fiber
264-MCA0412-2AAS1	MPO Pre-connectorized LGX cassette SC Multimode OM4, Standard Loss, Type-A, 1x MPO, 12-fiber
264-MCA0U12-2AAS2	MPO Pre-connectorized LGX cassette SC Singlemode UPC, Standard Loss, Type-A, 1x MPO, 12-fiber

NEED SOMETHING ELSE? USE CONFIGURATOR:

264-MCA0

-

A

Fiber Type

Fiber Count

Connector

Polarity

Loss

MPO

1 OM1

08

2 SC

A A

S Standard Loss

1 MPO1

3 OM3

12

3 LC

B B

L Low Loss

2 MPO2

4 OM4

16


C C

U SM UPC

24

A SM APC

LGX Cassettes – Splicing Cassettes

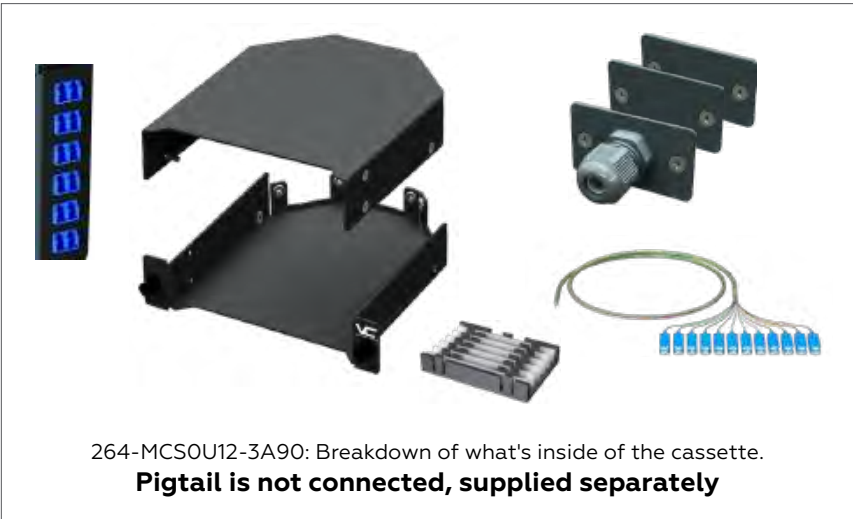

264-MCS0U12-3A90: Breakdown of what's inside of the cassette.
Pigtail is not connected, supplied separately

- Included:**
- 1 × base with cover;
 - 1 × front bracket with installed adapters;
 - 1 × set of ANSI/TIA-598-color-coded pigtails matching connector type and fiber count;
 - 1 × set of splice holders matching fiber count with 265-SLV01-3A splice protection sleeves;
 - 1 × rear M12/PG7 cable gland adapter plate;
 - 2 × blank rear adapter plates.

- Features:**
- Mounting: Standard LGX footprint and mechanism
 - W: 130 mm (5.12 in), H: 29 mm (1.14 in), D: 130 mm - 145 mm (5.12 in - 5.7 in)
 - Telcordia GR-326-CORE compatible

Item #	Description
264-MCS0312-3A90	Splicing LGX cassette LC Multimode OM3, 900 μm matching pigtail, sleeves, splice holder, 12-fiber
264-MCS0412-3A90	Splicing LGX cassette LC Multimode OM4, 900 μm matching pigtail, sleeves, splice holder, 12-fiber
264-MCS0U12-3A90	Splicing LGX cassette LC Singlemode SM UPC, 900 μm matching pigtail, sleeves, splice holder, 12-fiber
264-MCS0312-2A90	Splicing LGX cassette SC Multimode OM3, 900 μm matching pigtail, sleeves, splice holder, 12-fiber
264-MCS04122A90	Splicing LGX cassette SC Multimode OM4, 900 μm matching pigtail, sleeves, splice holder, 12-fiber
264-MCS0U12-2A90	Splicing LGX cassette SC Singlemode SM UPC, 900 μm matching pigtail, sleeves, splice holder, 12-fiber

NEED SOMETHING ELSE? **USE CONFIGURATOR:**

264 - M C S O - A 9 0

Fiber Type

Fiber Count

Connector

1 OM1

08

2 SC

3 OM3

12

3 LC

4 OM4

16

U SM UPC

24

A SM APC

Mechanical - 12-Packs



Features:

- Factory pre-polished
- Telcordia GR-326-CORE
- Tools: Fiber stripper, fiber cleaver, cleaning wipes, VFL (optional)



Item #	Description
263-OSP03-10Z12	Singlemode UPC SC Plug, 2-3 mm buffered jacket, 12-pack
263-OSP03-10Y12	Singlemode APC SC Plug, 2-3 mm buffered jacket, 12-pack
263-OSP03-10A12	Multimode OM1 SC Plug, 2-3 mm buffered jacket, 12-pack
263-OSP03-10C12	Multimode OM3 SC Plug, 2-3 mm buffered jacket, 12-pack
263-OSP04-1FZ12	Singlemode UPC LC Plug, 2-3 mm buffered jacket, 12-pack
263-OSP04-1FY12	Singlemode APC LC Plug, 2-3 mm buffered jacket, 12-pack
263-OSP04-1BZ12	Singlemode UPC LC Plug, 0.9 mm tight buffered, 12-pack
263-OSP04-1BY12	Singlemode APC LC Plug, 0.9 mm tight buffered, 12-pack
263-OSP04-1BA12	Multimode OM1 LC Plug, 0.9 mm tight buffered, 12-pack
263-OSP04-1BC12	Multimode OM3 LC Plug, 0.9 mm tight buffered, 12-pack

Cleaver

P108

Tools

P118

Singlemode UPC

263-OSP03-10Z12



Singlemode APC

263-OSP03-10Y12



Multimode OM1

263-OSP03-10A12



Multimode OM3

263-OSP03-10C12



263-OSP04-1FZ12



263-OSP04-1FY12



263-OSP04-1BA12



263-OSP04-1BC12



263-OSP04-1BZ12



263-OSP04-1BY12




Watch video



Contamination
(dust / oil / debris)



DIRTY CONNECTOR



CLEAN CONNECTOR



Inspection-ready

Epoxy Plugs - 12-Packs



STD (Standard)



UNI (Unibody)

Features:

- Plugs of other colors are available as special orders, minimum order quantity – 100 plugs of each color
- Telcordia GR-326-CORE



[Cleaning Kit](#)

[P109](#)

Item #	Description
263-OFC01-1BY12	Singlemode APC FC Simplex Plug, 12-pack
263-OFC01-1BZ12	Singlemode UPC FC Simplex Plug, 12-pack
263-OFC03-1BY12	Singlemode APC SC Simplex Plug, 12-pack
263-OFC03-1BZ12	Singlemode UPC SC Simplex Plug, 12-pack
263-OFC03-1BC12	Multimode OM3 SC Simplex Plug, 12-pack
263-OFC04-1BY12	Singlemode APC LC Simplex Plug, 12-pack
263-OFC04-1BZ12	Singlemode UPC LC Simplex Plug, 12-pack
263-OFC04-2BY12	Singlemode APC LC Duplex Standard Plug, 12-pack
263-OFC04-2BZ12	Singlemode UPC LC Duplex Standard Plug, 12-pack
263-OFC04-2BC12	Multimode OM3 LC Duplex Standard Plug, 12-pack
263-OFC04-2BD12	Multimode OM4 LC Duplex Standard Plug, 12-pack
263-OFC04-3BY12	Singlemode APC LC Duplex Unibody Plug, 12-pack
263-OFC04-3BZ12	Singlemode UPC LC Duplex Unibody Plug, 12-pack
263-OFC04-3BC12	Multimode OM3 LC Duplex Unibody Plug, 12-pack
263-OFC04-3BD12	Multimode OM4 LC Duplex Unibody Plug, 12-pack

			SM UPC	SM APC	OM3	OM4
FC	SX		263-OFC01-1BZ12 	263-OFC01-1BY12 		
					263-OFC03-1BC12 	
SC	SX		263-OFC03-1BZ12 	263-OFC03-1BY12 		
LC	SX	STD	263-OFC04-1BZ12 	263-OFC04-1BY12 		
	DX	STD	263-OFC04-2BZ12 	263-OFC04-2BY12 	263-OFC04-2BC12 	263-OFC04-2BD12 
		UNI	263-OFC04-3BZ12 	263-OFC04-3BY12 	263-OFC04-3BC12 	263-OFC04-3BD12 

Looks Clean.
Isn't Clean.

Even brand-new connectors can contain dust and contaminants that impact performance.

Click. Clean. Connect.



CLEANING KITS



CLEANING PENS



CLEANING WIPES

Mechanical Splicing Tool Kit



Item #	Description
269-MSP01-01	Optical Fiber Mechanical Splicing Tool Kit

Included:

No.	Item	Quantity	PN for reordering*
1	Cable cutter, round	1	078-1024
2	Cable jacket cutting and slitting tool, dia. 1.2 mm–6.4 mm	1	078-1022
3	Electrician's scissors	1	269-PAC04-0003
4	Optical fiber stripper, 3-step (2 mm–3 mm/0.9 mm/0.25 mm)	1	269-PAC05-0006
5	Kevlar shears, ceramic	1	269-PAC04-0005
6	Visual fault locator	1	269-PAC10-0001
7	Pre-moistened wipes, IPA, 1 pack	10	269-PAC03-0004
8	Cleaning agent dispensing bottle, 100 ml (3.4 fl oz)**	1	269-PAC03-0007
9	Permanent marker, fine-point, black	1	269-PAC05-0002
10	Ruler, SI/USCU, 6- or 12-in, stainless steel	1	269-PAC05-0003
11	Electrical tape, multicolor, six rolls, 18 mm x 2 m (0.7 in x 6.6 ft)	1	269-PAC05-0004
12	Storage container, five-compartment, 90 mm x 180 mm (3-½ in x 7 in), plastic, 2-pack	1	269-PAC02-0003
13	Safety goggles	1	269-PAC01-0001
14	Portable carrying soft-case bag	1	269-PAC02-0001

*Re-ordered products may not be identical to those in the original kit but have the same functional properties. **Spray bottle is supplied empty due to shipping safety restrictions



Optical Fiber Cleavers and Replacement Blades



Item #	Description
269-CVR01-1A	Optical fiber precision cleaver with scrap collector
269-CVR01-1A-1	Replacement blade for 269-CVR01-1A
269-CVR02-1A	Optical fiber cleaver portable
269-CVR02-1A-1	Replacement blade for 269-CVR02-1A



Optical Fiber Cleaning Kit

Item #	Description
269-CLN01	Optical Fiber Cleaning Kit – Basic



Included:

No.	Item	Quantity	PN for reordering*
1	Optical fiber connector cleaner dispenser type	1	269-PAC03-0001
2	Cleaning foam swabs tipped 2.5-mm pack of 50	1	269-PAC03-0002
3	Cleaning foam swabs tipped 1.25-mm pack of 50	1	269-PAC03-0003
4	Pre-moistened wipes IPA 1-pack	10	269-PAC03-0004
5	Optical fiber connector cleaning cube 120 capacity	1	269-PAC03-0005
6	Cleaning agent dispensing bottle, 100 ml (3.4 fl oz)**	1	269-PAC03-0006

*Re-ordered products may not be identical to those in the original kit but have the same functional properties.
**Spray bottle is supplied empty due to shipping safety restrictions



Optical Fiber Cleaning Tools

269-CLN02-A



269-CLN02-B



Item #	Description
269-CLN02-A	Optical Fiber Cleaning Pen Tool - 1.25-mm
269-CLN02-B	Optical Fiber Cleaning Pen Tool - 2.5-mm

Click. Clean. Connect.



Splice Trays/Cassettes

Splice Trays/Cassettes



265-CAS01-1B200



265-CAS01-2B200



Item #	Description
265-CAS01-1B200	Optical fiber splice tray/cassette, compact , stackable, 24-fiber, black
265-CAS01-2B200	Optical fiber splice tray/cassette, standard , stackable, 24-fiber, transparent cover , black

Features:

- o Two splice holders
- o Fiber-management and slack storage mechanism
- o Cable anchoring points
- o Vertically stackable
- o Telcordia GR-771-CORE; RoHS-Compliant

[Fiber Enclosures](#)

[P93](#)

Array Splice Cassette

265-CAS10-F06A2



265-CAS10-F08A2




265-CAS10-F12A2



Features:

- o Compatible splicing: fusion splice, heat-shrink protection sleeves
- o Cartridges: 6, 8 and 12
- o Sleeve size: 40 mm (1.6 in)
- o Mounting: 2 x M3x0.5x5 CTS machine screws
- o Telcordia GR-771-CORE; ANSI/UL 94 V-2; RoHS

Item #	Description
265-CAS10-F06A2	Array Splice Cassette, 6-Position , up to 72 splices/fibers
265-CAS10-F08A2	Array Splice Cassette, 8-Position , up to 96 splices/fibers
265-CAS10-F12A2	Array Splice Cassette, 12-Position , up to 144 splices/fibers

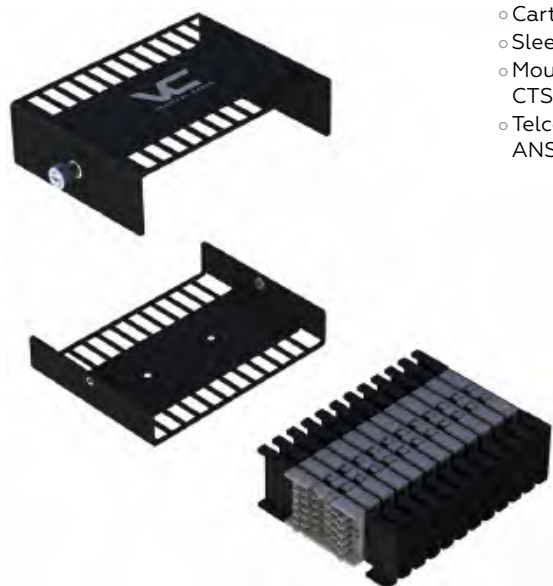

Fusion Splice Holders



Features:

- Fusion splice, heat-shrink protection sleeves
- 6 slots × 2 fibers/slot = 12 fibers
- Adhesive pad (265-HLD01-2B-00), no pad (265-HLD02-2B#)

Item #	Description
265-HLD01-2B-00	Optical fiber splice holder, adhesive mounting , two fibers per slot, six slots, twelve fibers
265-HLD02-2B	Optical fiber splice holder, mechanical mounting , two fibers per slot, six slots, twelve fibers

Fusion Splice Protection Sleeves



Item #	Description
265-SLV01-3A-1H	Optical fiber splice protection sleeve, 2.5 mm × 40 mm , pack of 100
265-SLV01-3B-1H	Optical fiber splice protection sleeve, 2.5 mm × 60 mm , pack of 100

Mechanical Splices and Splice Holders




Item #	Description
265-MEC01-E	Optical fiber mechanical splice, universal , 0.25 and 0.9 mm, pack of six
265-HLD11-2B4-0	Optical fiber mechanical splice, stackable (two splices/slot), adhesive mounting, 12-fiber

Features:

- Mechanical splice
- Single fiber
- Fiber coating size: 250 µm–900 µm

Fan-out Kits

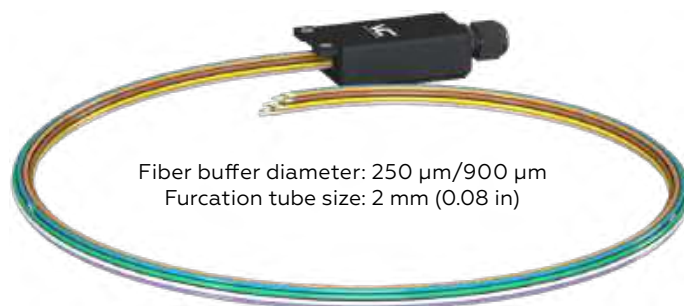

Fiber buffer diameter: 250 µm/900 µm
Furcation tube size: 2 mm (0.08 in)




On a rack

Item #	Description
269-FOK06-580C	Optical Fiber Cable Fan-out Kit, 6-Fiber , Color tubes, 1-m (40-in) legs
269-FOK12-580C	Optical Fiber Cable Fan-out Kit, 12-Fiber , Color tubes, 1-m (40-in) legs

Pigtails

1 m		SM UPC	SM APC	OM3	OM4
1-fiber	SC	265-OFPO3-1AUM1	265-OFPO3-1AAM1	265-OFPO3-1A3M1	
	LC	265-OFPO4-1AUM1	265-OFPO4-1AAM1	265-OFPO4-1A3M1	265-OFPO4-1A4M1
6-fiber	SC	265-OFPO3-1FUM1	265-OFPO3-1FAM1	265-OFPO3-1F3M1	
	LC	265-OFPO4-1FUM1	265-OFPO4-1FAM1	265-OFPO4-1F3M1	265-OFPO4-1F4M1
12-fiber	SC	265-OFPO3-1LUM1	265-OFPO3-1LAM1	265-OFPO3-1L3M1	
	LC	265-OFPO4-1LUM1	265-OFPO4-1LAM1	265-OFPO4-1L3M1	265-OFPO4-1L4M1
2 m		SM UPC	SM APC	OM3	OM4
1-fiber	SC	265-OFPO3-1AUM2	265-OFPO3-1AAM2	265-OFPO3-1A3M2	
	LC	265-OFPO4-1AUM2	265-OFPO4-1AAM2	265-OFPO4-1A3M2	265-OFPO4-1A4M2
6-fiber	SC	265-OFPO3-1FUM2	265-OFPO3-1FAM2	265-OFPO3-1F3M2	
	LC	265-OFPO4-1FUM2	265-OFPO4-1FAM2	265-OFPO4-1F3M2	265-OFPO4-1F4M2
12-fiber	SC	265-OFPO3-1LUM2	265-OFPO3-1LAM2	265-OFPO3-1L3M2	
	LC	265-OFPO4-1LUM2	265-OFPO4-1LAM2	265-OFPO4-1L3M2	265-OFPO4-1L4M2
3 m		SM UPC	SM APC	OM3	OM4
1-fiber	SC	265-OFPO3-1AUM3	265-OFPO3-1AAM3	265-OFPO3-1A3M3	
	LC	265-OFPO4-1AUM3	265-OFPO4-1AAM3	265-OFPO4-1A3M3	265-OFPO4-1A4M3
6-fiber	SC	265-OFPO3-1FUM3	265-OFPO3-1FAM3	265-OFPO3-1F3M3	
	LC	265-OFPO4-1FUM3	265-OFPO4-1FAM3	265-OFPO4-1F3M3	265-OFPO4-1F4M3
12-fiber	SC	265-OFPO3-1LUM3	265-OFPO3-1LAM3	265-OFPO3-1L3M3	
	LC	265-OFPO4-1LUM3	265-OFPO4-1LAM3	265-OFPO4-1L3M3	265-OFPO4-1L4M3



- Features:**
- LSZH jackets
 - Assembled in the factory
 - All standard colors
 - High-quality components

Trunk Custom Cable Assembly - Special Order

- All trunks 15 meters (50 feet) or longer are shipped on a reel with a pulling eye on one side
- All trunks 150 meters (500 feet) or longer are shipped on a reel with a pulling eye on both sides
- Standard breakout legs are 900µm color-coded for simplex connectors, and 2.0mm for duplex
- Breakout lengths are:
24 inches for fiber counts 36 fiber and less; **34 inches** for fiber counts 48 fiber and higher



261-T							-						
Fire Rating	Fiber Count	Fiber Type	Connect-1	Connect-2	Length, M	Jacket Color							
A Indoor, OFNP (Plenum)	XXX 002-288	1 OM1	L1 LC Simplex (900)	00 Pigtail	XXX	BL Blue							
B Indoor, OFNR (Riser)		3 OM3	L2 LC Duplex	L1 LC Simplex (900)		OR Orange							
C Indoor, OFCP (Armored Plenum)		4 OM4	L3 LC/APC (900)	L2 LC Duplex		GN Green							
D Indoor, OFCR (Armored Riser)		S SM/UPC	L4 LC/APC	L3 LC/APC (900)		BN Brown							
E Indoor/Outdoor, OFNP (Plenum)			C1 SC Simplex (900)	L4 LC/APC		SL Slate							
F Indoor/Outdoor, OFNR (Riser)			C2 SC Duplex	C1 SC Simplex (900)		WH White							
G Indoor/Outdoor, OFCP (Armored Plenum)			C3 SC/APC Simplex (900)	C2 SC Duplex		RD Red							
H Indoor/Outdoor, OFCR (Armored Riser)			C4 SC/APC Duplex	C3 SC/APC Simplex (900)		BK Black							
				C4 SC/APC Duplex		YE Yellow							
						VT Violet							
						AQ Aqua							
						LG Lime Green							

Example

261-TA0243L1L1-150AQ - Fiber Trunks OFNP 24-F OM3 LC/LC
UPC 900 µm Break, 150 FT Aqua

Optical Fiber Patch Cords

Singlemode UPC Polish - CUSTOM LENGTHS AVAILABLE



Size	ST-ST	LC-ST	LC-SC	SC-SC	SC-ST	LC-LC
1 m	261-STST/1SM	261-LCST/1SM	261-LCSC/1SM	261-SCSC/1SM	261-SCST/1SM	261-LCLC/1SM
2 m	261-STST/2SM	261-LCST/2SM	261-LCSC/2SM	261-SCSC/2SM	261-SCST/2SM	261-LCLC/2SM
3 m	261-STST/3SM	261-LCST/3SM	261-LCSC/3SM	261-SCSC/3SM	261-SCST/3SM	261-LCLC/3SM
5 m	261-STST/5SM	261-LCST/5SM	261-LCSC/5SM	261-SCSC/5SM	261-SCST/5SM	261-LCLC/5SM
7 m	261-STST/7SM	261-LCST/7SM	261-LCSC/7SM	261-SCSC/7SM	261-SCST/7SM	261-LCLC/7SM
10 m	261-STST/10SM	261-LCST/10SM	261-LCSC/10SM	261-SCSC/10SM	261-SCST/10SM	261-LCLC/10SM
15 m	261-STST/15SM	261-LCST/15SM	261-LCSC/15SM	261-SCSC/15SM	261-SCST/15SM	261-LCLC/15SM

Multimode OM1



Size	ST-ST	LC-ST	LC-SC	SC-SC	SC-ST	LC-LC
1 m	261-STST/1MM	261-LCST/1MM	261-LCSC/1MM	261-SCSC/1MM	261-SCST/1MM	261-LCLC/1MM
2 m	261-STST/2MM	261-LCST/2MM	261-LCSC/2MM	261-SCSC/2MM	261-SCST/2MM	261-LCLC/2MM
3 m	261-STST/3MM	261-LCST/3MM	261-LCSC/3MM	261-SCSC/3MM	261-SCST/3MM	261-LCLC/3MM
5 m	261-STST/5MM	261-LCST/5MM	261-LCSC/5MM	261-SCSC/5MM	261-SCST/5MM	261-LCLC/5MM
7 m	261-STST/7MM	261-LCST/7MM	261-LCSC/7MM	261-SCSC/7MM	261-SCST/7MM	261-LCLC/7MM
10 m	261-STST/10MM	261-LCST/10MM	261-LCSC/10MM	261-SCSC/10MM	261-SCST/10MM	261-LCLC/10MM
15 m	261-STST/15MM	261-LCST/15MM	261-LCSC/15MM	261-SCSC/15MM	261-SCST/15MM	261-LCLC/15MM

Multimode OM3



Size	ST-ST	LC-ST	LC-SC	SC-SC	SC-ST	LC-LC
1 m	263-STST/1MM	263-LCST/1MM	263-LCSC/1MM	263-SCSC/1MM	263-SCST/1MM	263-LCLC/1MM
2 m	263-STST/2MM	263-LCST/2MM	263-LCSC/2MM	263-SCSC/2MM	263-SCST/2MM	263-LCLC/2MM
3 m	263-STST/3MM	263-LCST/3MM	263-LCSC/3MM	263-SCSC/3MM	263-SCST/3MM	263-LCLC/3MM
5 m	263-STST/5MM	263-LCST/5MM	263-LCSC/5MM	263-SCSC/5MM	263-SCST/5MM	263-LCLC/5MM
7 m	263-STST/7MM	263-LCST/7MM	263-LCSC/7MM	263-SCSC/7MM	263-SCST/7MM	263-LCLC/7MM
10 m	Call	Call	Call	263-SCSC/10MM	Call	263-LCLC/10MM
15 m	Call	Call	Call	263-SCSC/15MM	Call	263-LCLC/15MM

Singlemode APC Polish

Size	SC-SC
1 m	261-ASC-ASC/1SM
2 m	261-ASC-ASC/2SM
3 m	261-ASC-ASC/3SM
5 m	261-ASC-ASC/5SM



Multimode OM4

Size	LC-LC
1 m	264-LCLC/1MM
2 m	264-LCLC/2MM
3 m	264-LCLC/3MM




OSP Transition Boxes

COPPER BULK CABLE



268-OPB01-104

cable inlets: x1
cable outlets: x6



Supplied without fiber adapters.
**COMPATIBLE ONLY WITH
FLANGED ADAPTERS.**

[Fiber Adapters](#)

[P102](#)

OPTICAL FIBER BULK CABLE



268-OPB01-208

cable inlets: x2
cable outlets: x8

CABLE MANAGEMENT & RACKS



268-OPB01-216

cable inlets: x2
cable outlets: x16

Features:

- ANSI/TIA-568.3-D, GR-769
- Operating temperature: -10 °C–60 °C (14 °F–140 °F)
- High-impact, UV-resistant, water-resistant
- Sealing rating: IP65

Applications:

- Outdoor (FTTx, CATV, etc.)

Item #	Description
268-OPB01-104	Optical Fiber OSP Transition Box, 4 slots
268-OPB01-208	Optical Fiber OSP Transition Box, 8 slots
268-OPB01-216	Optical Fiber OSP Transition Box, 16 slots



INDUSTRIAL & HARSH ENVIRONMENTS

OSP Splice Closures

Horizontal, In-line



265-OSC00-09606



265-OSC00-09608



265-OSC00-24006



Item #	Description
265-OSC00-09606	OSP Splice Closure, Horizontal, In-line, 96-fiber capacity, 6 cable entry ports, up to 96 fibers, IP68, UV resistant
265-OSC00-09608	OSP Splice Closure, Horizontal, In-line, 96-fiber capacity, 8 cable entry ports, up to 96 fibers, IP68, UV resistant
265-OSC00-24006	OSP Splice Closure, Horizontal, In-line, 240-fiber capacity, 6 cable entry ports, up to 240 fibers, IP68, UV resistant



Vertical, Dome



265-OSC10-04804



265-OSC10-09602



265-OSC10-28806


Features:

- High-impact fiber-reinforced PC
- UV resistant
- IP68
- Operating temperature: -40 °C–65 °C (-40 °F–149 °F)

Item #	Description
265-OSC10-04804	OSP Splice Closure, Vertical, Dome, 48-fiber capacity, 4 cable entry ports, up to 48 fibers, IP68, UV resistant
265-OSC10-09602	OSP Splice Closure, Vertical, Dome, 96-fiber capacity, 2 cable entry ports, up to 96 fibers, IP68, UV resistant
265-OSC10-28806	OSP Splice Closure, Vertical, Dome, 288-fiber capacity, 6 cable entry ports, up to 288 fibers, IP68, UV resistant

Installation Accessories

OSP Tension Clamps



269-OPH02-80702




269-OPH02-D10P7



048-301/TC

Item #	Description
269-OPH02-80702	OSP Tension Clamps - Self-supporting drop 8 in, fiber-reinforced plastic (FRP) or aramid yarn messenger 3 mm–7 mm (0.12 in–0.3 in)
269-OPH02-80902	OSP Tension Clamps - Self-supporting drop 8 in, fiber-reinforced plastic (FRP) or aramid yarn messenger 6 mm–9 mm (0.25 in–0.35 in)
269-OPH02-D10P7	OSP Tension Clamps - FTTH drop flat cable 3 mm–5 mm (0.12 in–0.2 in)
269-OPH02-D11P2	OSP Tension Clamps - FTTH drop flat cable 3 mm–7 mm (0.12 in–0.3 in)
048-301/TC	OSP Drop Wire Tension Clamp

OSP Anchor Clamps - Round ADSS cable



269-OPH00-01110



Item #	Description
269-OPH00-01110	OSP Anchor Clamps - Round ADSS cable 8 mm–11 mm (0.3 in–0.4 in)
269-OPH00-01415	OSP Anchor Clamps - Round ADSS cable 11 mm–14 mm (0.4 in–0.6 in)

Features:

- Tension, self-adjusting plastic wedges
- Round ADSS cable construction

Applications:

- Dead-end support/drop, suspension support

OSP Hooks

Item #	Description
269-OPH30-011P5	OSP Hooks 1.5 kN (~340 lbf)



OSP Brackets

Item #	Description
269-OPH10-0115	OSP Brackets 15 kN (~3,370 lbf)
269-OPH10-0304	OSP Brackets 5 kN (~1,120 lbf)



269-OPH10-0115



269-OPH10-0304

OSP Steel Banding



269-OPH20-42050



269-OPH21-420L



269-OPH21-420T

Item #	Description
269-OPH20-42050	OSP Stainless Steel Banding Strap Roll
269-OPH21-420L	OSP Stainless Steel Banding Strap Buckle L-type
269-OPH21-420T	OSP Stainless Steel Banding Strap Buckle T-type
269-OPH22-0120	OSP Steel Banding Tool Rotary Type
269-OPH22-0220	OSP Steel Banding Tool Jack Type



269-OPH22-0120



269-OPH22-0220

OSP Suspension Clamps

Round ADSS cable



269-OPH01-01204



269-OPH01-01504



269-OPH01-02004

Messenger ("8 in)



269-OPH01-80802

Round drop (two-piece item)



269-OPH01-D0P3

Item #	Description
269-OPH01-01204	OSP Suspension Clamps – Round ADSS, self-supporting, or drop cable 8 mm–12 mm (0.3 in–0.5 in)
269-OPH01-01504	OSP Suspension Clamps – Round ADSS, self-supporting, or drop cable 10 mm–15 mm (0.4 in–0.6 in)
269-OPH01-02004	OSP Suspension Clamps – Round ADSS, self-supporting, or drop cable 15 mm–20 mm (0.6 in–0.8 in)
269-OPH01-80802	OSP Suspension Clamps – Messenger ("8 in) – 4 mm–8 mm (0.16 in–0.4 in)
269-OPH01-D0P3	OSP Suspension Clamps – Round drop 2 mm–8 mm (0.08 in–0.4 in)



Tools

Installation Tools

Cable Preparation Tool – Sheath Cutter

Item #	Description
269-CSC01-CL628	Optical Fiber Cable Sheath Cutter, Circular/Longitudinal, Cable Diameters: 6 mm–28 mm



Cutting modes:
circular ("ringing");
longitudinal ("slitting");
midspan/endspan

[Bulk Optical Fiber Cable](#)

[P84](#)

Maintenance Tools

LC Plug Insertion/Extraction Tool

Item #	Description
269-SAM01-1A	Optical Fiber Connector Insertion-Extraction Tool LC



Features:

- Glass-filled polyphenylene sulfide (PPS).
- Mode of operation: insertion/extraction
- Compatible with LC style connectors, simplex and duplex



Scissors and Strippers

Item #	Description
269-PAC04-0005	Professional Aramid Fiber Scissors for optical fiber cable preparation
269-PAC05-0006	Optical fiber stripper, 3-step (2 mm–3 mm/0.9 mm/0.25 mm)



Features:

- Strips the 0.06–0.12 in. fiber jacket, 0.02–0.04 in. buffer coating, and 0.01 in. coating to expose the 125 micron glass fiber
- Hex wrench included for depth adjustments

Features:

- Heavy duty, industrial quality stainless steel serrated edge blades for increased cutting capacity
- Non-slip serrated blades
- Rounded points for extra safety



269-PAC05-0006



269-PAC04-0005

INSTALLATION, TESTING, MAINTENANCE » Inspection Tools

Heavy-Duty Field VFL

Item #	Description
269-VFL03	Optical Fiber Visual Fault Locator, Hand-Held, 5-mW, 2.5-mm Adapter



Optical Fiber Visual Fault Locator, Compact, 5-mW, 2.5-mm Adapter

Item #	Description
269-VFL04	Optical Fiber Visual Fault Locator, Pen-Style, 5-mW, 2.5-mm, Adapter



INSTALLATION, TESTING, MAINTENANCE » Testing Instruments

Light Source and Power Meter

Item #	Description
269-OLS02-12	Light Source, Wavelengths: 850 nm, 1300 nm
269-OLS02-35	Light Source, Wavelengths: 1310 nm, 1550 nm
269-OPM01-5026	Power Meter, Power Range: -50 dBm+26 dBm
269-OPM01-7006	Power Meter, Power Range: -70 dBm+6 dBm
269-PAC02-0001	Portable carrying soft-case bag



269-OLS02 - Light Source 269-OPM01 - Power Meter

Features:

- Interface type: 2.5-mm (FC, ST, SC)
- Display: LCD monochrome; backlight mode
- Power supply: batteries 3× AAA 1.5 V

Test Leads & Test Adapter

Item #	Description
269-PAC11-0002	Optical Fiber Test Lead, 2.5-mm to 1.25-mm Conversion, FC Plug to SC Plug, SX, 50-μm Core, 1 ft, SC SX
269-PAC11-0003	Optical Fiber Test Lead, 2.5-mm to 1.25-mm Conversion, FC Plug to LC Plug, SX, 50-μm Core, 1 ft, LC SX Adapter
269-PAC11-0004	Optical Fiber Test Lead, 2.5-mm to 1.25-mm Conversion, FC Plug to SC Plug, UPC, SX, SM Core, 1 ft, SC SX Adapter
269-PAC11-0005	Optical Fiber Test Lead, 2.5-mm to 1.25-mm Conversion, FC Plug to LC Plug, UPC, SX, SM Core, 1 ft, LC SX Adapter
269-PAC11-0001	Optical Fiber Test Adapter, 2.5-mm to 1.25-mm Conversion, Hybrid, FC Plug to LC Adapter, SX, SM, UPC




269-PAC11-0002



269-PAC11-0003



269-PAC11-0004



269-PAC11-0005



269-PAC11-0001

VC
VERTICAL CABLE

29

H

VC
VERTICAL CABLE

28

1A-I08 1A-I09 1A-I10 1A-I11 1A-I12

1A-I13 1A-I14

3.

CABLE MANAGEMENT & RACKS

Raceways & Accessories


COPPER BULK CABLE

OPTICAL FIBER BULK CABLE

CABLE MANAGEMENT & RACKS

INDUSTRIAL & HARSH ENVIRONMENTS

Office White



Ivory



Splice Cover



Internal Corner



Tee



External Corner



Elbow



Ceiling Drop



End Cap



Available in
Ivory and
Office white
and three sizes

	Item	Office White	Ivory
0.75 in	6 FT Raceway	045-TSR1FW-6A	045-TSR1I-6A
	Splice Cover	045-TSR1FW-14	045-TSR1I-14
	Tee	045-TSR1FW-21-1	045-TSR1I-21-1
	Elbow	045-TSR1FW-25-1	045-TSR1I-25-1
	External Corner	045-TSR1FW-29-1	045-TSR1I-29-1
	Internal Corner	045-TSR1FW-33-1	045-TSR1I-33-1
	End Cap	045-TSR1FW-36	045-TSR1I-36
	Ceiling Drop	045-TSR1FW-50	045-TSR1I-50
1.25 in	6 FT Raceway	045-TSR2FW-6A	045-TSR2I-6A
	Splice Cover	045-TSR2FW-14	045-TSR2I-14
	Tee	045-TSR2FW-21-1	045-TSR2I-21-1
	Elbow	045-TSR2FW-25-1	045-TSR2I-25-1
	External Corner	045-TSR2FW-29-1	045-TSR2I-29-1
	Internal Corner	045-TSR2FW-33-1	045-TSR2I-33-1
	End Cap	045-TSR2FW-36	045-TSR2I-36
	Ceiling Drop	045-TSR2FW-50	045-TSR2I-50
1.75 in	6 FT Raceway	045-TSR3FW-6A	045-TSR3I-6A
	Splice Cover	045-TSR3FW-14	045-TSR3I-14
	Tee	045-TSR3FW-21-1	045-TSR3I-21-1
	Elbow	045-TSR3FW-25-1	045-TSR3I-25-1
	External Corner	045-TSR3FW-29-1	045-TSR3I-29-1
	Internal Corner	045-TSR3FW-33-1	045-TSR3I-33-1
	End Cap	045-TSR3FW-36	045-TSR3I-36
	Ceiling Drop	045-TSR3FW-50	045-TSR3I-50

Features:

- Tamper resistant, the cover's self-locking, hidden positive latch permits quick re-entry as well as providing a secure installation of premise wire
- Manufactured of UL 94 V-0 rated PVC material
- Fittings incorporate a minimum 1 in bend radius per ANSI/TIA-568.0 and ANSI/TIA-569
- Rubber-based foam tape adhesive with high ultimate bond strength conforms to any surface
- Flexible hinge allows the raceway to endure numerous openings without creating discoloration or stress cracking
- Junction boxes can be used with this raceway for electrical or data outlets
- Measuring 6 FT in length

Clean Lines for Low Voltage Design.



Hook and Loop Strap



Item #	Description
045-V12/75BK	1/2 in Width Hook and Loop Strap, 75 ft, Black
045-V12/75BL	1/2 in Width Hook and Loop Strap, 75 ft, Blue
045-V12/75WH	1/2 in Width Hook and Loop Strap, 75 ft, White
045-V34/75BK	3/4 in Width Hook and Loop Strap, 75 ft, Black
045-V34/75BL	3/4 in Width Hook and Loop Strap, 75 ft, Blue
045-V34/75WH	3/4 in Width Hook and Loop Strap, 75 ft, White

- Perfect for mounting, organizing & identification applications
- Reuse and readjust hook and loop straps multiple times
- Cut to any length
- 75 FT rolls



Standard Cable Ties



Natural



Black



Red



- 18 or 50 lbf tensile rating
- Standard or Plenum
- RoHS-Compliant
- 100 per bag

Item #	Description
045-CT/18/4BK	4 in Cable Ties, 18 lbf tensile rating, Black
045-CT/18/4NT	4 in Cable Ties, 18 lbf tensile rating, Natural
045-CT/50/8BK	8 in Cable Ties, 50 lbf tensile rating, Black
045-CT/50/8NT	8 in Cable Ties, 50 lbf tensile rating, Natural
045-CT/50/12BK	12 in Cable Ties, 50 lbf tensile rating, Black
045-CT/50/12NT	12 in Cable Ties, 50 lbf tensile rating, Natural
045-CT/50/15BK	15 in Cable Ties, 50 lbf tensile rating, Black
045-CT/50/15NT	15 in Cable Ties, 50 lbf tensile rating, Natural
045-CTP/M50/8R	8 in Cable Ties, Red (PLENUM)
045-CTP/M50/12R	12 in Cable Ties, Red (PLENUM)
045-CTP/M50/15R	15 in Cable Ties, Red (PLENUM)



Self-Gripping Cable Ties



Item #	Description
045-V12/12BK	12 in Self-Gripping Cable Ties, 50 Pack
045-V12/8BK	8 in Self-Gripping Cable Ties, 50 Pack

- The Double-Sided Self-gripping Tie Wraps feature full surface-area
- No clipping is necessary, in contrast to the traditional tie wrap
- Reuse and readjust the Self-gripping Tie Wraps multiple times
- Perfect for mounting, organizing & identification applications
- 50 strips per bag



Mounting Bases



Item #	Description
045-MB/A/11/BK	Adhesive Mounting Base, 100 Pack, Black
045-MB/A/11/NT	Adhesive Mounting Base, 100 Pack, Natural
045-MB/S/11/BK	Screw Mounting Base, 100 Pack, Black
045-MB/S/11/NT	Screw Mounting Base, 100 Pack, Natural

- Material: Polyamide 6.6 (PA66)
- Operating Temperature: -40°F +185°F (-40°C+85°C) continuous
- Flammability: UL 94 V2
- 100 per bag



J-Hooks and D Rings

J-Hooks



Item #	Description
048-140/34	J-Hook, 3/4 in Galvanized Steel
048-139/16	J-Hook, 1-5/16 in Galvanized Steel
048-141/20	J-Hook, 2 in Galvanized Steel
048-142/40	J-Hook, 4 in Galvanized Steel
048-143/34W	J-Hook, 3/4 in Galvanized Steel, with Bat Wing for 1/4 in Rod
048-144/16W	J-Hook, 1-5/16 in Galvanized Steel, with Bat Wing for 1/4 in Rod
048-145/20W	J-Hook, 2 in Galvanized Steel, with Wing for 1/4 in Rod
048-146/40W	J-Hook, 4 in Galvanized Steel, with #12 Wing for 1/4 in Rod
048-150/34AB	J-Hook, 3/4 in Galvanized Steel, with angle bracket
048-154/20AB	J-Hook, 2 in Galvanized Steel, with with angle bracket
048-156/40AB	J-Hook, 4 in Galvanized Steel, with with angle bracket
048-160/BC	Beam Clamp for J-Hook

Features:

- Galvanized steel; Rust resistant zinc coating
- Hooks available with wing, which mounts on vertically spanning steel rods
- Winged Hooks feature cable retainer pin
- Wing attachments mount on 1/4 in or 3/8 in rods



048-160/BC

Distribution D Rings



Features:


- Aluminum
- Available in multiple sizes
- Used to provide support to vertical and horizontal cable runs



Item #	Description
048-170/D2	Distribution D Ring, 2 in, Aluminum
048-175/D3	Distribution D Ring, 3 in, Aluminum
048-185/D5	Distribution D Ring, 5 in, Aluminum

Bridle Rings

Machine Screw Bridle Rings

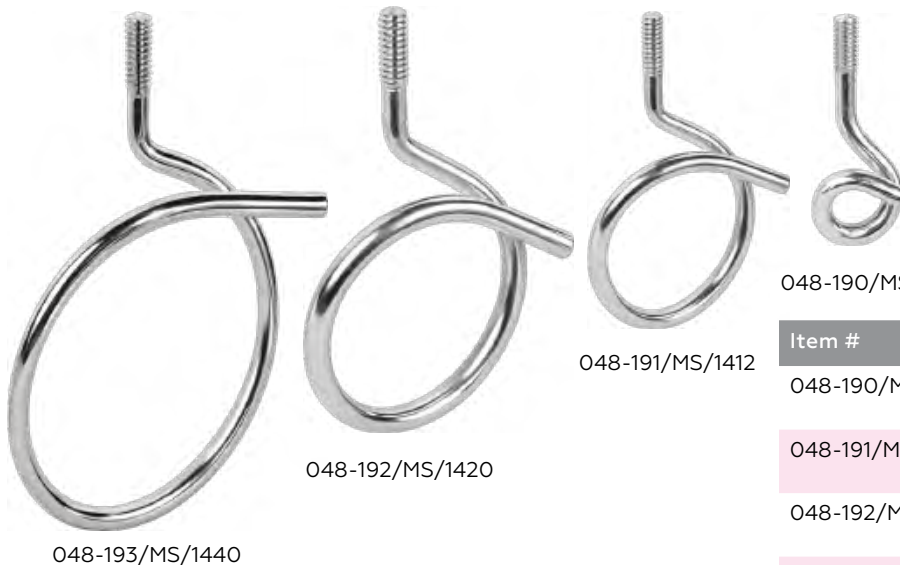

048-190/MS/1414


048-191/MS/1412

048-192/MS/1420

048-193/MS/1440

Item #	Description
048-190/MS/1414	Bridle Rings with Machine screw thread 1/4-20 x 1-1/4 in
048-191/MS/1412	Bridle Rings with Machine screw thread 1/4-20 x 1-1/2 in
048-192/MS/1420	Bridle Rings with Machine screw thread 1/4-20 x 2 in
048-193/MS/1440	Bridle Rings with Machine screw thread 1/4-20 x 4 in

Wood Screw Bride Rings

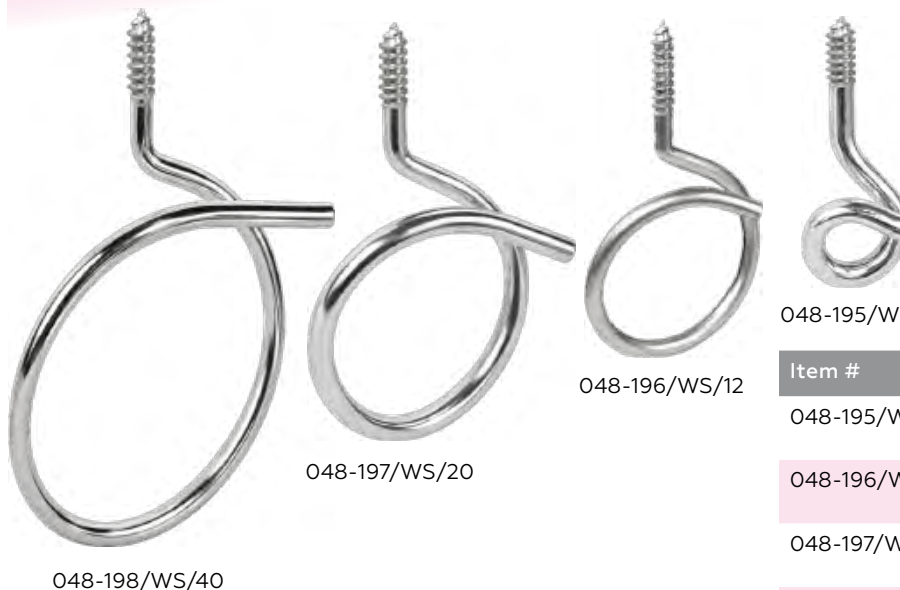

Features:

- Aluminum
- Available in multiple sizes
- Used to provide support to vertical and horizontal cable runs



048-195/WS/14

048-196/WS/12

048-197/WS/20

048-198/WS/40

Item #	Description
048-195/WS/14	Bridle Rings with Wood Screw thread 1/4-20 x 1-1/4 in
048-196/WS/12	Bridle Rings with Wood Screw thread 1/4-20 x 1-1/2
048-197/WS/20	Bridle Rings with Wood Screw thread 1/4-20 x 2 in
048-198/WS/40	Bridle Rings with Wood Screw thread 1/4-20 x 4 in

Snap-on Bridle Ring Cable Saddle



048-150/34AB



Item #	Description
048-211/BRS/20	Snap-on Bridle Ring Cable Saddle, 2-in, Plastic, Yellow

Racks & Accessories

Horizontal Wire Managers - Double-sided


044-2391/DS/1U



1 RMU

Height 1.75 in Width 19 in Depth 4 in Weight 1.5 lb

044-2392/DS/2U

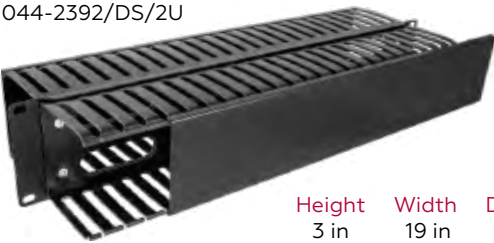

2 RMU

Height 3 in Width 19 in Depth 6 in Weight 3 lb

Item #	Description
044-2391/DS/1U	1 RMU, Horizontal Wire Manager Double-Sided
044-2392/DS/2U	2 RMU, Horizontal Wire Manager Double-Sided



Horizontal Wire Managers - Single-sided


044-2393/DC/1U



1 RMU

Height 1 3/4 in Width 19 in Depth 3 in Weight 2 lb

044-2394/DC/2U

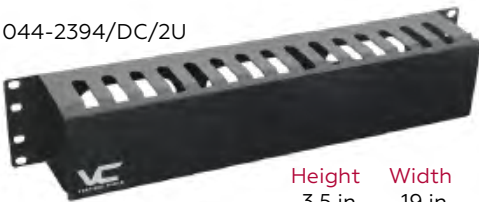

2 RMU

Height 3.5 in Width 19 in Depth 3 in Weight 2 lb


044-2495/DCP/1U



1 RMU

Height 1.75 in Width 19 in Depth 4 in Weight 1.5 lb

044-2496/DCP/2U

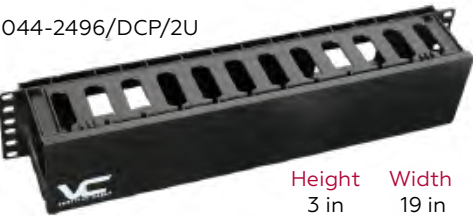

2 RMU

Height 3 in Width 19 in Depth 6 in Weight 3 lb

Item #	Description
044-2393/DC/1U	1 RMU, Horizontal Wire Manager - Metal
044-2394/DC/2U	2 RMU, Horizontal Wire Manager - Metal
044-2495/DCP/1U	1 RMU, Horizontal Wire Manager - Plastic
044-2496/DCP/2U	2 RMU, Horizontal Wire Manager - Plastic

- Fits standard 19 in Racks or Wall-Mounts
- Steel Main Mount
- Plastic Wire Management Fingers
- Plastic Covers
- Comes with x4 M6 screws (cage nuts not included)

044-2393/1U




1 RMU

Height 1 3/4 in Width 19 in Depth 3 in Weight 1 lb

Item #	Description
044-2393/1U	1 RMU, Horizontal Wire Manager - with metal holders, no cover



1 RMU, 2 RMU Patch Panel Support Bracket

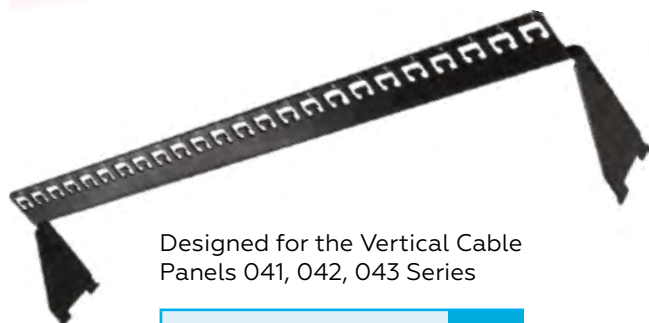

Designed for the Vertical Cable Panels 041, 042, 043 Series

[Patch Panels](#)

P64

Item #	Description
044-2396/1U	1 RMU, Patch Panel Support Bracket - For 24 Port Patch Panel
044-2397/2U	2 RMU, Patch Panel Support Bracket - For 48 Port Patch Panel

Features:

- Durable black powder-coated finish
- Designed to fit Vertical Cable patch panels
- Heavy-duty steel construction



1 RMU, 2 RMU Wall-Mount Brackets



046-388/S



046-389/S



Comes with mounting screws

Item #	Description
046-388/S	1 RMU Mounting Bracket, 1 piece
046-389/S	2 RMU Mounting Bracket, 1 piece



Screws, Washers & Cage Nuts



047-WSN-0050



047-WSN-0600



047-WSN-0070

Item #	Description
047-WSN-0050	x50 M6 Screws, x50 Washers & x50 Nuts - Length 12 mm (0.47 inches)
047-WSN-0600	x50 #12-24 US Style Screws & Washers - Length 16 mm (0.62 inches)
047-WSN-0070	x50 #10-32 US Style Screws & Washers - Length 20 mm (0.75 inches)

1 RMU, 19 in Power Strip with Circuit Breaker



Height	Width	Depth	Weight	Cord Length
1.77 in	19 in	1.77 in	2 lb	6 FT

Features:

- 1 RMU, 19-inch rack-mount design
- 8 grounded outlets for power distribution
- 15A, 125V rating
- Durable metal housing
- Protective switch cover to prevent accidental shutdown



PROTECTIVE SWITCH COVER

Item #	Description
047-WPS-2000	1 RMU, 19 in Power Strip with Circuit Breaker




Racks & Accessories » VERTICAL WALL-MOUNT RACK

1 RMU, 2 RMU, 3 RMU, 4 RMU Vertical Wall-Mount Rack / Bracket

Features:

- Durable aluminum construction
- Flush mount for wall or under-desk use
- Pre-drilled for #12-24 screws
- Includes mounting hardware
- Fits standard 19-inch rack equipment

Item #	Description
047-WVR-1000	1 RMU Vertical Wall-Mount Rack / Bracket
047-WVR-2000	2 RMU Vertical Wall-Mount Rack / Bracket
047-WVR-3000	3 RMU Vertical Wall-Mount Rack / Bracket
047-WVR-4000	4 RMU Vertical Wall-Mount Rack / Bracket

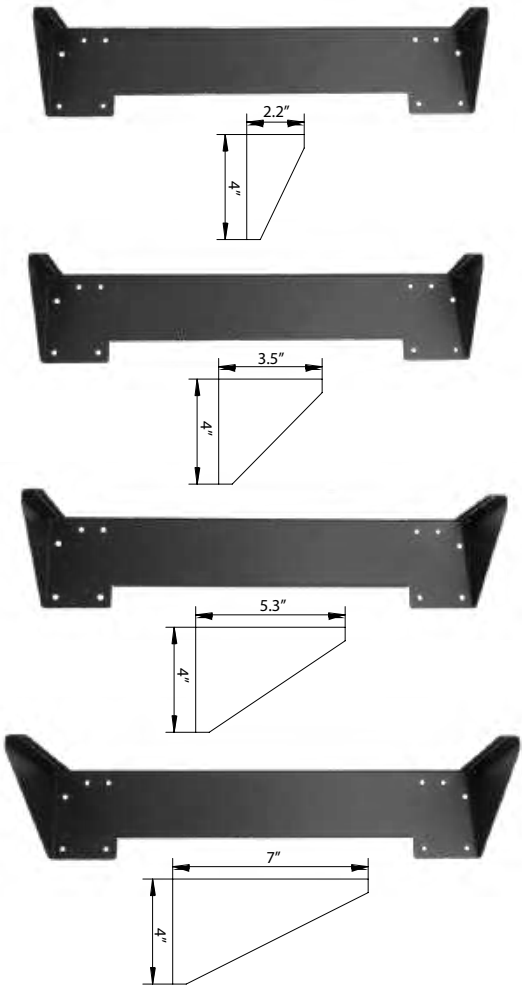

1 RMU

Height	Width	Depth	Weight	Capacity
4 in	19 in	2.2 in	1.5 lb	11 lb

2 RMU

Height	Width	Depth	Weight	Capacity
4 in	19 in	3.5 in	1.7 lb	15 lb


3 RMU

Height	Width	Depth	Weight	Capacity
4 in	19 in	5.3 in	1.98 lb	17.6 lb

4 RMU

Height	Width	Depth	Weight	Capacity
4 in	19 in	7 in	2.2 lb	22 lb

Illustration of panel-mounted installation

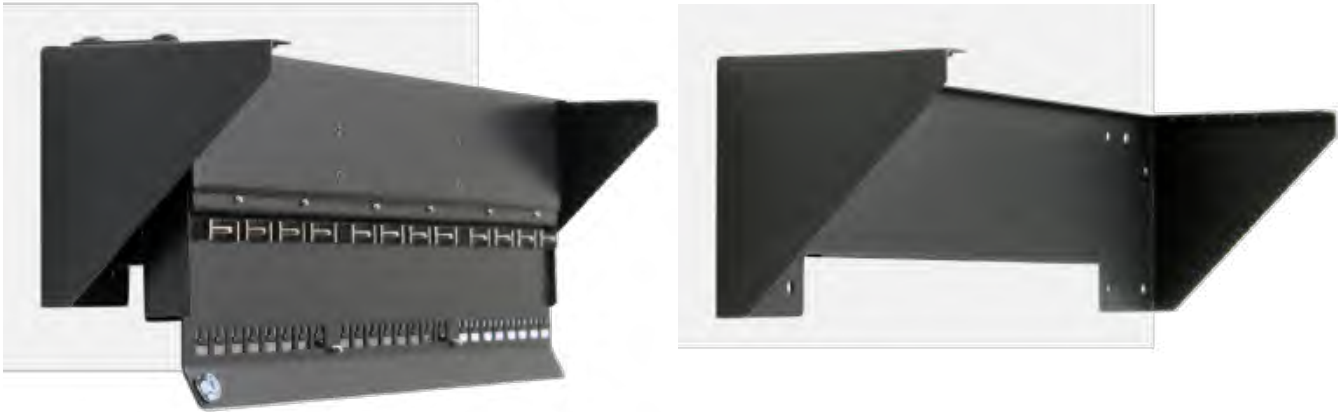

Hinged Type - Adjustable Wall-Mount Brackets



Features:

- Hinged design for easy access
- Adjustable depth from 10 to 13 in
- Cold-rolled steel (SPCC), 2 mm thickness (14 gauge)
- Includes M4 screws

Item #	Description
046-388/E	1 RMU, Hinge Type Adjustable Wall-Mount Bracket
046-389/E	2 RMU, Hinge Type Adjustable Wall-Mount Bracket
046-390/E	4 RMU, Hinge Type Adjustable Wall-Mount Bracket



Hinged Type Wall-Mount Brackets




Features:

- Heavy-duty steel construction
- Static-resistant black finish
- Includes M4 screws

Item #	Description
046-388	1 RMU, Hinged Type Wall-Mount Bracket
046-389	2 RMU, Hinged Type Wall-Mount Bracket
046-390	4 RMU, Hinged Type Wall-Mount Bracket



Surface-Mount Equipment Brackets Award-Winning Compact Design

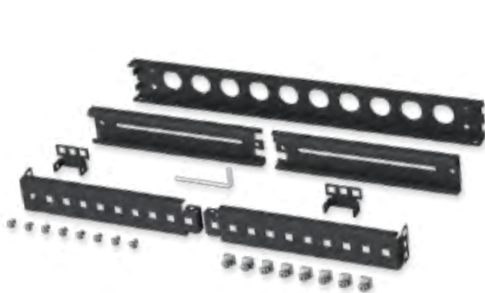

Features:

- Eight depth levels, 1-in step
- Max equipment unit depth: 17.5 in
- M6 cage nuts/screws

Item #	Description
254-EMB01-B1B1	1 RMU Surface-Mount Equipment Bracket, Field-Configurable, 19-in. Compact design.



Open Rack Enclosures

Open Racks - 2-Post and 4-Post



2 Post, 20 RMU

047-WOS-0220

- Heavy-duty steel construction
- Ships unassembled
- Easy assembly
- Includes hardware and mounting set (28x #12-24 screws*, washers)

*SKU: 047-WSN-0600



Height	Width	Depth	Base Dim.	Weight	Capacity
40 in	20 in	14 in	14x20.27 in	21 lb	440 lb

[Patch Panels](#)

[P64](#)

[Fiber Enclosures](#)

[P93](#)

[Blank Filler Panels](#)

[P66](#)

Height	Width	Base Dim.	Weight	Capacity
84 in	20.25 in	15x20.25 in	28 lb	440 lb



2 Post, 45 RMU

047-WOS-0245

- Heavy-duty steel construction
- Ships unassembled
- Easy assembly
- Includes hardware and mounting set (28x #12-24 screws*, washers)

*SKU: 047-WSN-0600

[Shelves](#)

[P128](#)

[Horizontal Wire Managers](#)


[P126](#)



Features:

- Compatible with standard 19-inch rack equipment
- Rigid steel frame with unit markings
- Static-resistant powder-coated finish
- Pre-drilled for #12-24 screws

Height	Width	Depth	Weight	Capacity
84 in	20 in	24-36 in	61 lb	1322 lb

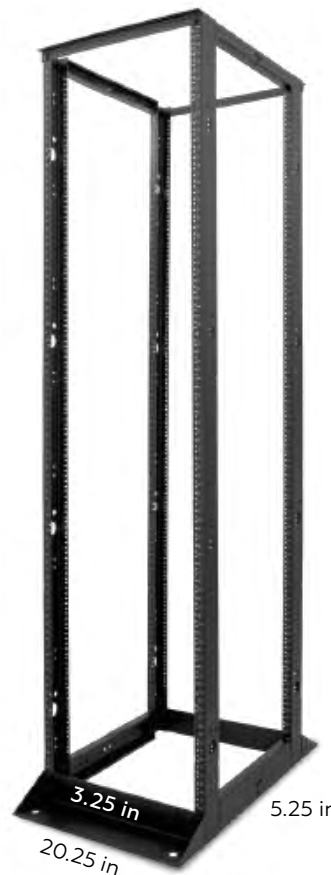

4 Post, 45 RMU

047-WOS-0445

- Heavy-duty steel construction
- Ships unassembled
- Easy assembly
- Adjustable depth (24 to 36 inches)
- 2 millimeter steel construction
- Includes hardware and mounting set (40x #12-24 screws*, washers)
- Ships in two boxes (poles and base with hardware)

*SKU: 047-WSN-0600




Item #	Description
047-WOS-0220	20 RMU, 2 post, 19 in Open Rack
047-WOS-0245	45 RMU, 2 post, 19 in Open Rack
047-WOS-0445	45 RMU, 4 post, 19 in Open Rack

Wire Managers

Vertical Wire Managers

2 Post, 20 RMU

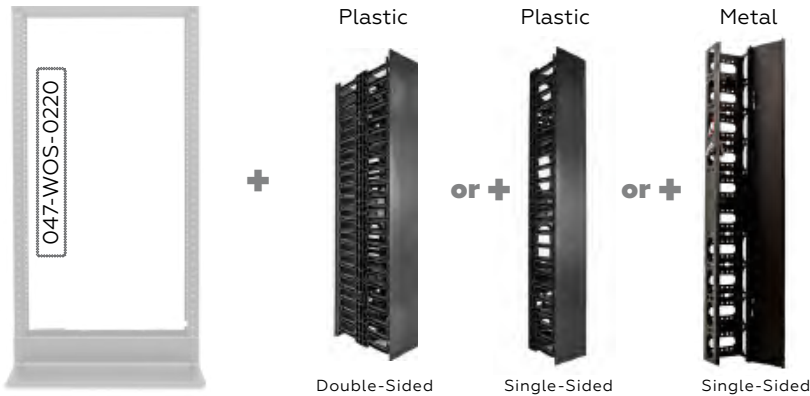

Metal Manager

Height	Width	Depth	Weight
32 in	3.7 in	3 in	7 lb


Item #	Description
047-WVM-2010	20 RMU, Vertical Wire Manager, Metal

Features:

- Heavy-Duty Steel Frame
- Black Powder-Coated Finish



4 Post, 45 RMU

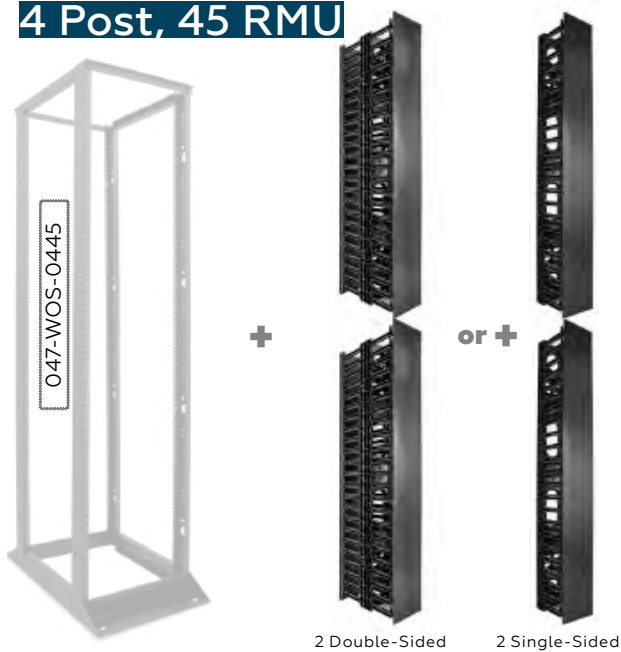

Plastic Managers



Height	Width	Depth	Type
40-8/8 in	5 in	6-5/16 in	Single-Sided
40-3/8 in	5 in	12 in	Double-Sided

Item #	Description
047-VMF-4501	45 RMU, Vertical Wire Manager, Plastic, Single-Sided
047-VMF-4502	45 RMU, Vertical Wire Manager, Plastic, Double-Sided
047-VMF-4500/B	Metal Brackets for 047-VMF Series

Features:


- High-quality plastic construction (fingerprint-resistant finish)
- Removable cover for easy access
- Flexible fingers for smooth cable routing
- Left or right side rack mounting (L/R)
- Fits most standard relay racks
- Two sections included (2 × 22.5 RMU)
- Use one or combine for full 45 RMU
- Includes mounting hardware (screws + metal ears)

2 Post, 45 RMU

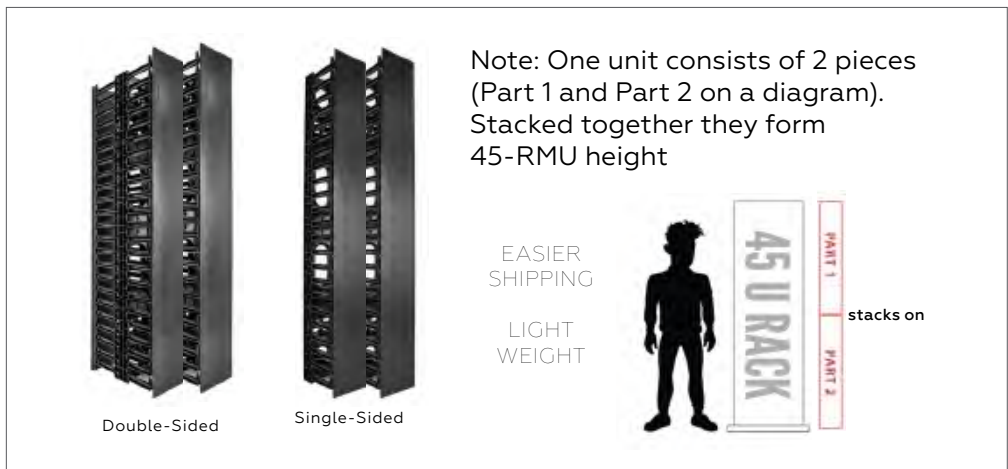

Wall-Mount Racks

Rack It Right — Choose the Best Fit for Your Space.



Part Number	047-WFM	047-WFJ	047-WTH	047-WSM
Style	Adjustable Depth	Fixed Depth	Adjustable Depth Wall-mounting vertical brackets	Adjustable Depth - Swing-out Wall-mounting vertical brackets
Thread Type	Cage nuts with M6 screws	Cage nuts with M6 screws	Pre-drilled holes for #12-24 screws	Cage nuts with M6 screws
Depth	18-30 in	18 in	18-30 in	18-30 in
Capacity	Up to 110 lb	Up to 66 lb	Up to 150 lb	Up to 65 lb
RMU spaces	6, 8, 9, 12, 16, 20 RMU	6, 8, 9, 12, 16, 20 RMU	6, 8, 9, 12, 16, 20 RMU	6, 8, 9, 12, 16, 20 RMU

047-WFM SERIES Open Fixed Rack - Adjustable depth

6 RMU

047-WFM-0626

Height	Width	Mounting Width	Depth	Weight	Capacity
14.29 in	20 in	19 in	18-30 in	17.6 lb	33/110 lb

8 RMU

047-WFM-0826

Height	Width	Mounting Width	Depth	Weight	Capacity
17.8 in	20 in	19 in	18-30 in	22 lb	44/110 lb

9 RMU

047-WFM-0926

Height	Width	Mounting Width	Depth	Weight	Capacity
19.6 in	20 in	19 in	18-30 in	22.7 lb	55/110 lb

12 RMU

047-WFM-1226

Height	Width	Mounting Width	Depth	Weight	Capacity
24.8 in	20 in	19 in	18-30 in	23.1 lb	66/110 lb

16 RMU

047-WFM-1626

Height	Width	Mounting Width	Depth	Weight	Capacity
31.77 in	20 in	19 in	18-30 in	24.9 lb	66/110 lb

20 RMU

047-WFM-2026

Height	Width	Mounting Width	Depth	Weight	Capacity
38.80 in	20 in	19 in	18-30 in	25.8 lb	77/110 lb

- Fits standard 19-inch rack equipment
- 2 millimeter steel construction
- Open-frame wall-mount
- Includes mounting set (*M6 screws, cage nuts, washers)
- 6-9 RMU: 12× | 12-20 RMU: 20×
- Static-resistant powder-coated finish
- Ships unassembled with hardware

*SKU: 047-WSN-0050



Item #	Description
047-WFM-0626	6 RMU Open Wall-Mount - Adjustable depth
047-WFM-0826	8 RMU Open Wall-Mount - Adjustable depth
047-WFM-0926	9 RMU Open Wall-Mount - Adjustable depth
047-WFM-1226	12 RMU Open Wall-Mount - Adjustable depth
047-WFM-1626	16 RMU Open Wall-Mount - Adjustable depth
047-WFM-2026	20 RMU Open Wall-Mount - Adjustable depth



047-WFJ SERIES Open Frame Rack

6 RMU 047-WFJ-0653

Height	Width	Depth	Weight	Capacity
14.25 in	20 in	18 in	15 lb	26 lb

8 RMU 047-WFJ-0853

Height	Width	Depth	Weight	Capacity
17.75 in	20 in	18 in	15.6 lb	33 lb

9 RMU 047-WFJ-0953

Height	Width	Depth	Weight	Capacity
19.50 in	20 in	18 in	15.7 lb	44 lb

12 RMU 047-WFJ-1253

Height	Width	Depth	Weight	Capacity
24.75 in	20 in	18 in	17.25 lb	55 lb

16 RMU 047-WFJ-1653

Height	Width	Depth	Weight	Capacity
31.75 in	20 in	18 in	18.5 lb	66 lb

20 RMU 047-WFJ-2053

Height	Width	Depth	Weight	Capacity
38.80 in	20 in	18 in	20.7 lb	66 lb

- Fits standard 19-inch rack equipment
- Open-frame steel wall-mount
- Includes mounting set (*M6 screws, cage nuts, washers)
- 6-9 RMU: 12" | 12-20 RMU: 20"
- Static-resistant powder-coated finish
- Ships unassembled with hardware
- Up to 66 pounds load capacity

*SKU: 047-WSN-0050



Item #	Description
047-WFJ-0653	6 RMU Wall-Mount Open Frame Rack
047-WFJ-0853	8 RMU Wall-Mount Open Frame Rack
047-WFJ-0953	9 RMU Wall-Mount Open Frame Rack
047-WFJ-1253	12 RMU Wall-Mount Open Frame Rack
047-WFJ-1653	16 RMU Wall-Mount Open Frame Rack
047-WFJ-2053	20 RMU Wall-Mount Open Frame Rack



Wall-Mount Racks Applications:



01

AV & STAGE GEAR



02

OFFICE NETWORK
INFRASTRUCTURE



03

TELECOM &
DATA CLOSETS



04

RETAIL /
HOSPITALITY TECH



05

SECURITY & ACCESS
SYSTEMS



06

HOME AUTOMATION /
SMART SYSTEMS



07

EDUCATION &
TRAINING FACILITIES



08

HEALTHCARE
ENVIRONMENTS



Open Rack - Fixed Frame, Adjustable depth - High Capacity

6 RMU

047-WTH-0618

Height	Width	Depth	Weight	Capacity
14.25 in	20 in	18-30 in	23.15 lb	150 lb

8 RMU

047-WTH-0818

Height	Width	Depth	Weight	Capacity
17.75 in	20 in	18-30 in	24.5 lb	150 lb

9 RMU

047-WTH-0918

Height	Width	Depth	Weight	Capacity
19.5 in	20 in	18-30 in	25.4 lb	150 lb

12 RMU

047-WTH-1218

Height	Width	Depth	Weight	Capacity
24.75 in	20 in	18-30 in	27.4 lb	150 lb

16 RMU

047-WTH-1618

Height	Width	Depth	Weight	Capacity
31.75 in	20 in	18-30 in	30 lb	150 lb

20 RMU

047-WTH-2018

Height	Width	Depth	Weight	Capacity
38.8 in	20 in	18-30 in	32.8 lb	150 lb

Features:

- Fits standard 19-inch rack equipment
- 2 millimeter steel construction
- Open-frame wall-mount
- Includes mounting set
(#12-24screws*, flat washers) 6 RMU: 12x | 8 RMU: 12x | 9 RMU: 12x | 12 RMU: 20x | 16 RMU: 20x | 20 RMU: 20x

*SKU: 047-WSN-0600



Item #	Description
047-WTH-0618	6 RMU Open Wall-Mount - Adjustable depth - Fixed frame
047-WTH-0818	8 RMU Open Wall-Mount - Adjustable depth - Fixed frame
047-WTH-0918	9 RMU Open Wall-Mount - Adjustable depth - Fixed frame
047-WTH-1218	12 RMU Open Wall-Mount - Adjustable depth - Fixed frame
047-WTH-1618	16 RMU Open Wall-Mount - Adjustable depth - Fixed frame
047-WTH-2018	20 RMU Open Wall-Mount - Adjustable depth - Fixed frame



One Rack. Endless Applications.



Network & Telecom Closets



AV & Media Rooms



Retail / Hospitality



Security Systems



Home Automation

Open Rack - Swing Out, Adjustable

6 RMU

047-WSM-0626

Height	Width	Depth	Weight	Capacity
16.4 in	21.65 in	18-30 in	25 lb	25 lb (open position) 65 lb (close position)

8 RMU

047-WSM-0826

Height	Width	Depth	Weight	Capacity
19.9 in	21.65 in	18-30 in	27 lb	25 lb (open position) 65 lb (close position)

9 RMU

047-WSM-0926

Height	Width	Depth	Weight	Capacity
21.70 in	21.65 in	18-30 in	27.5 lb	33 lb (open position) 65 lb (close position)

12 RMU

047-WSM-1226

Height	Width	Depth	Weight	Capacity
26.9 in	21.65 in	18-30 in	29.1 lb	33 lb (open position) 65 lb (close position)

16 RMU

047-WSM-1626

Height	Width	Depth	Weight	Capacity
33.9 in	21.65 in	18-30 in	31.9 lb	44 lb (open position) 65 lb (close position)

20 RMU

047-WSM-2026

Height	Width	Depth	Weight	Capacity
40.9 in	21.65 in	18-30 in	32.6 lb	44 lb (open position) 65 lb (close position)

Features:

- Reversible swing-out design (left/right)
- Fits standard 19-inch rack equipment
- Includes mounting set (*M6 screws, flat washers)
6-9 RMU: 12x | 12-20 RMU: 20x
- Adjustable depth from 18 to 30 inches
- Static-resistant powder-coated finish
- Ships unassembled with hardware

*SKU: 047-WSN-0050



Item #	Description
047-WSM-0626	6 RMU Open Wall-Mount - Adjustable depth - Swing Out
047-WSM-0826	8 RMU Open Wall-Mount - Adjustable depth - Swing Out
047-WSM-0926	9 RMU Open Wall-Mount - Adjustable depth - Swing Out
047-WSM-1226	12 RMU Open Wall-Mount - Adjustable depth - Swing Out
047-WSM-1626	16 RMU Open Wall-Mount - Adjustable depth - Swing Out
047-WSM-2026	20 RMU Open Wall-Mount - Adjustable depth - Swing Out



With Open Racks Our Customers usually buy these products:



Blank Patch Panels

P66



DIN-Rail adapter bracket

P151



Power Strip

P127



Horizontal Wire Manager

P126



CAT5E Patch Panels

P64



Optical Fiber Enclosures

P93

Racks & Accessories >> 047-WWM SERIES

Side Panel Access

6 RMU	Height	Width	Depth	Mounting Depth	Weight	Capacity
047-WWM-0660	14.57 in	23.62 in	17.72 in	15.7 in	32 lb	132 lb



9 RMU	Height	Width	Depth	Mounting Depth	Weight	Capacity
047-WWM-0960	19.69 in	23.62 in	17.72 in	15.7 in	40 lb	132 lb



12 RMU	Height	Width	Depth	Mounting Depth	Weight	Capacity
047-WWM-1260	25 in	23.62 in	17.72 in	15.7 in	53 lb	132 lb



Features:

- Durable design with a built-in cooling fan
- Fits standard 19-inch rack equipment
- Dust-protective glass front door with lock
- Ideal for servers, storage, and AV equipment
- Side panels open for easy access (no lock)
- Ships fully assembled with hardware
- Includes mounting set (*M6 screws, cage nuts, washers)
6 RMU: 12x | 9 RMU: 12x | 12 RMU: 20x
- *SKU: 047-WSN-0050

Applications:

- Small to Mid-Sized Network Closets
- Retail and Branch Office Installations
- AV Distribution and Patch Panel Housing
- Surveillance and Security Equipment
- Education and Campus Infrastructure

Item #	Description
047-WWM-0660	6 RMU Wall-Mount Enclosure - Side Access
047-WWM-0960	9 RMU Wall-Mount Enclosure - Side Access
047-WWM-1260	12 RMU Wall-Mount Enclosure - Side Access



Swing Out



047-WHS-1260

12 RMU

047-WHS-1270

Height
25 inWidth
24 inDepth
24 inUsable Depth
15.75 inWeight
68 lbCapacity
132 lbHeight
25 inWidth
24 inDepth
31 inUsable Depth
22.5 inWeight
67 lbCapacity
132 lb

047-WHS-1560

15 RMU

047-WHS-1570

Height
30 inWidth
24 inDepth
24 inUsable Depth
15.75 inWeight
70.5 lbCapacity
132 lbHeight
30 inWidth
24 inDepth
31 inUsable Depth
22.5 inWeight
81.5 lbCapacity
132 lb

047-WHS-2060

20 RMU

047-WHS-2070

Height
39 inWidth
24 inDepth
24 inUsable Depth
15.75 inWeight
85.5 lbCapacity
132 lbHeight
39 inWidth
24 inDepth
31 inUsable Depth
22.5 inWeight
98.5 lbCapacity
132 lb

Features:

- Durable design with a built-in cooling fan
- Fits standard 19-inch rack equipment
- Dust-protective glass front door with lock
- Locking side doors for secure access
- Reversible front door hinge
- Ships assembled with hardware included
- Includes mounting set (*M6 screws, cage nuts, washers)

*SKU: 047-WSN-0050

Applications:

- Small to mid-sized network closets and telecom rooms
- Commercial surveillance systems
- Industrial IT enclosures
- Retail back office setups
- Any environment requiring secure, swing-out wall-mounted access

Built-in cooling fan



Item #	Description
047-WHS-1260	12 RMU Wall-Mount Swing-out Enclosure, 24 in Depth
047-WHS-1560	15 RMU Wall-Mount Swing-out Enclosure, 24 in Depth
047-WHS-2060	20 RMU Wall-Mount Swing-out Enclosure, 24 in Depth
047-WHS-1270	12 RMU Wall-Mount Swing-out Enclosure, 31 in Depth
047-WHS-1570	15 RMU Wall-Mount Swing-out Enclosure, 31 in Depth
047-WHS-2070	20 RMU Wall-Mount Swing-out Enclosure, 31 in depth



Network and Server Cabinets

Network Cabinets - 047-NCA Series

27 RMU

047-NCA-2766

Height	Width	Depth	Usable Depth	Color	Weight	Capacity
54.5 in	24 in	24 in	20 in	Black	150 lb	2200 lb

37 RMU

047-NCA-3766

Height	Width	Depth	Usable Depth	Color	Weight	Capacity
72 in	24 in	24 in	20 in	Black	193 lb	2200 lb

42 RMU

047-NCA-4266

Height	Width	Depth	Usable Depth	Color	Weight	Capacity
82 in	24 in	24 in	20 in	Black	218 lb	2200 lb

Features:

- Durable design with two built-in cooling fans
- Fits standard 19-inch rack equipment
- Dust-protective glass front door with lock
- Locking side doors for secure access
- Caster wheels and leveling feet for stability
- Vented top and bottom panels for airflow
- Removable side panels for easy access
- Steel construction
- Ships assembled with hardware included
- Includes M6 screws, washers, and cage nuts (047-WSN-0050)



Item #	Description
047-NCA-2766	27 RMU Rack Space Network Cabinet
047-NCA-3766	37 RMU Rack Space Network Cabinet
047-NCA-4266	42 RMU Rack Space Network Cabinet



Server Cabinet - 047-SRD Series

37 RMU

047-SRD-3768

Height	Width	Depth	Usable Depth	Color	Weight	Capacity
72 in	24 in	31.5 in	25.6 in	Black	194 lb	2204 lb

42 RMU

047-SRD-4268

Height	Width	Depth	Usable Depth	Color	Weight	Capacity
82 in	24 in	31.5 in	25.6 in	Black	306 lb	2204 lb

Features:

- Durable design with four built-in cooling fans
- Fits standard 19-inch rack equipment
- Steel mesh front door with lock
- Removable side panels for easy access (no lock)
- Caster wheels and leveling feet for stability
- Vented top and bottom panels for airflow
- Steel construction
- Ships assembled with hardware included
- Includes M6 screws, washers, and cage nuts (047-WSN-0050)

Front

Rear



Item #	Description
047-SRD-3768	37 RMU Rack Space Network Server Cabinet
047-SRD-4268	42 RMU Rack Space Network Server Cabinet



DVR Lockbox

15, 18, 21, 24 inches DVR Lockbox

15 in

047-DVR-1515

Height 5 in Width 15 in Depth 15 in Weight 14 lb

18 in

047-DVR-1818

Height 5 in Width 18 in Depth 18 in Weight 22 lb

21 in

047-DVR-2121

Height 8 in Width 21 in Depth 21 in Weight 32 lb

24 in

047-DVR-2124

Height 8 in Width 21 in Depth 24 in Weight 35.5 lb

Features:

- Heavy-duty steel construction
- Built-in cooling fan
- Lockable front panel
- Ships fully assembled

Applications:

- Surveillance DVR/NVR Equipment Protection
- Commercial & Retail Security Systems
- Home Surveillance & Smart Home Hubs
- Network Equipment Housing
- Access Control & Alarm Panel Storage



Front View



Rear View

Item #	Description
047-DVR-1515	15 inch DVR Security Lockbox (15 in depth)
047-DVR-1818	18 Inch DVR Security Lockbox (18 in depth)
047-DVR-2121	21 Inch DVR Security Lockbox (21 in depth)
047-DVR-2124	21 Inch DVR Security Lockbox (24 in depth)



Horizontal DVR Mounting Bracket

047-DVR-H

Height 12 in Width 21 in Depth 21 in Weight 7.1 lb



047-DVR-V

Height 21 in Width 8 in Depth 8 in Weight 6.3 lb



Features:

- Durable black powder-coated finish
- Includes mounting hardware



Item #	Description
047-DVR-H	Horizontal DVR Mounting Bracket
047-DVR-V	Vertical DVR Mounting Bracket



Shelves

1 RMU, 2 RMU & 3 RMU 19 in Single-Sided Vented Shelf



1 RMU

Height	Width	Depth	Weight	Capacity
1.75 in	19 in	12 in	3.7 lb	20 lb



2 RMU

Height	Width	Depth	Weight	Capacity
3.50 in	19 in	15.75 in	3.9 lb	37 lb

Features:

- High-quality SPCC cold rolled steel construction
- One-piece 19-inch vented shelf
- Fits standard 19-inch racks and wall-mounts
- Ideal for server and network applications
- Includes mounting set (*M6 screws, cage nuts, washers) 1-3 RMU: 4x
- Up to 37 lb load capacity



3 RMU

Height	Width	Depth	Weight	Capacity
5.25 in	19 in	15.75 in	4.1 lb	37 lb



Item #	Description
047-WVS-1300	1 RMU, 19 in Single-Sided Vented Shelf
047-WVS-2400	2 RMU, 19 in Single-Sided Vented Shelf
047-WVS-3400	3 RMU, 19 in Single-Sided Vented Shelf

*SKU: 047-WSN-0050

1 RMU, 2 RMU & 3 RMU 19 in Single-Sided Non-Vented Shelf



1 RMU

Height	Width	Depth	Weight	Capacity
1.75 in	19 in	12 in	3.9 lb	30.8 lb



2 RMU

Height	Width	Depth	Weight	Capacity
3.50 in	19 in	15.70 in	4.4 lb	44 lb

Features:

- High-quality SPCC cold rolled steel construction
- One-piece 19-inch non-vented shelf
- Fits standard 19-inch racks and wall-mounts
- Includes mounting set (*M6 screws, cage nuts, washers) 1-3 RMU: 4x
- Up to 44 pounds load capacity
- Ideal for network and server equipment



3 RMU


Height	Width	Depth	Weight	Capacity
5.25 in	19 in	15.63 in	4.9 lb	44 lb



Item #	Description
047-WSS-1300	1 RMU, 19 in Single-Sided Non-Vented Shelf
047-WSS-2400	2 RMU, 19 in Single-Sided Non-Vented Shelf
047-WSS-3400	3 RMU, 19 in Single-Sided Non-Vented Shelf

*SKU: 047-WSN-0050

1 RMU 19-inch Vented Four-Point Sliding Shelf

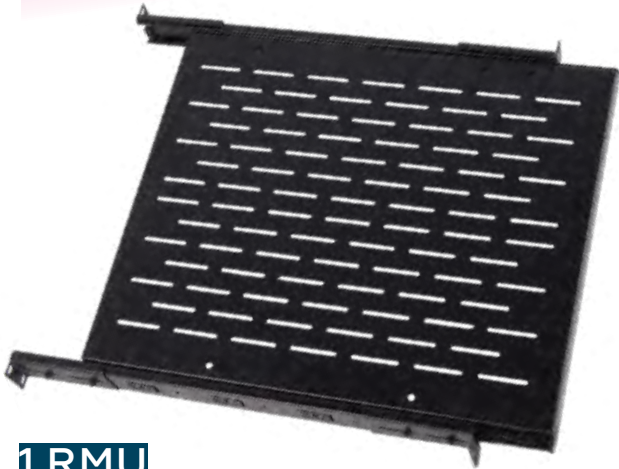

Only compatible with 4 post rack

[Four-Post Racks](#) **P131**

1 RMU

Height	Width	Depth	Weight	Capacity
1.75 in	19 in	25-36 in	10 lb	44 lb

Features:

- 1 RMU 19-inch vented sliding shelf
- Fits standard 4-post 19-inch racks
- Vented design for improved airflow
- High-quality SPCC cold rolled steel construction
- Includes 8× sets of M6 screws, washers, and cage nuts
- Supports up to 44 pounds load capacity
- Adjustable depth from 25 to 36 inches
- Suitable for network equipment and components



Item #	Description
047-WSS-3551	1 RMU, 19 in Vented Sliding Shelf

*SKU: 047-WSN-0050

2 RMU 19 in Heavy-Duty Adjustable Shelf



Only compatible with 4 post rack

Heavy-Duty Adjustable Shelves keep your rack organized, clutter-free, and looking sleek.

2 RMU

Height	Width	Depth	Weight	Capacity
3.5 in	19 in	22-42 in	13 lb	220 lb

Features:

- Heavy-duty adjustable shelf for standard 4-post 19-inch racks
- High-quality SPCC cold rolled steel construction
- Includes hardware and mounting set (16× *M6 screws, cage nut, washers)
- Adjustable depth from 22 to 42 inches
- Suitable for network equipment, components, and keyboards



Item #	Description
047-WAS-2400	2 RMU, 4 point, Heavy Duty Adjustable Shelf

*SKU: 047-WSN-0600



256-NA32B-3A201

100BASE-T

1

2

3

MODE 5 6

UI

SF

6

VC controls

256-NA32B-3A201

100BASE-T PoE T2

1

3

5

7

MODE 10 9

100BASE-T

10

UNMANAGED

VC controls

4.

INDUSTRIAL & HARSH

IP-Rated Boxes

As Delivered (Outlets and Glands are not Included)



253-SMB67-A0



253-SMB67-A1



253-SMB67-A2



253-SMB67-A3



253-SMB67-A4

Application Examples with Installed Outlet Modules and Cable Glands



253-SMB67-A1



253-SMB67-A2



253-SMB67-A3



253-SMB67-A4

Item #	Description
253-SMB67-A0	Surface-Mount Box, Blank/Unported, IP66/67
253-SMB67-A1	Surface-Mount Box, 1-Port – 1-Left-In 1-Left-Out, Blank, IP66/67
253-SMB67-A2	Surface-Mount Box, 2-Port – 2-Left-In/2-Right-Out, Blank, IP66/67
253-SMB67-A3	Surface-Mount Box, 1-Port – 1-Left-In/1-Top-Out, Blank, IP66/67
253-SMB67-A4	Surface-Mount Box, 2-Port – 2-Left-In/2-Top-Out, Blank, IP66/67

Included:

1 × base
(with integral sealing gasket);
1 × cover;
4 × cover screws;
4 × wood screws for surface mounting;
4 × cover screw hole plugs



Cable Glands and Blank Plugs



259-SLC01-F0C1



250-IOM68-A000



259-SLC01-F0A1



259-IMT01-A001



259-SLC01-F0A2



259-SLC02-B0F



Item #	Description
259-SLC01-F0C1	Cable Gland, M16, Plastic, 5-mm–10-mm Cable O.D.*
259-SLC01-F0A1	Cable Gland, M16, Plastic, 2-mm–3-mm Cable O.D.**
259-SLC01-F0A2	Cable Gland, M16, Plastic, 2-mm–3-mm Cable O.D.***
250-IOM68-A000	Blank Plug for Outlet Opening, IP68
259-SLC02-B0F	Blank Plug for Cable Gland Opening, IP68
259-IMT01-A001	Universal Wrench for IP-Rated Connectors

* Recommended for round twisted-pair and optical fiber cables.
** Recommended for simplex round optical fiber cables.
*** Recommended for duplex zipcord optical fiber cables.

Environmental protection: IP66/67.
Impact protection: IK07.
Cable gland IP rating: IP68.

Dimensions (without outlets and glands):
122 mm × 120 mm × 80 mm
(4.8 in × 4.7 in × 3.2 in)

Outlet/Terminal Modules

CAT6A Outlet Modules



Item #	Description
250-IOM68-A1A2	Outlet Module Socket-to-IDC CAT6A STP Panel Mounting, IP68
250-IOM68-A2A2	Outlet Module Socket-to-Socket CAT6A STP Panel Mounting, IP68

- o T568A/T568B wiring schemes
- o Conductor gauge: solid: 22-24 AWG
- o 750 mating cycles min
- o IP68

Included with the modules:



Optical Fiber Outlet Modules



Included with the modules:

Item #	Description
250-IOM68-A300	Outlet Module Optical Fiber Adapter, Blank White Bezel - Use 263-OFA Series

Terminal Modules



250-ITM68-A2A2

SECTIONAL VIEW



250-ICP68-B1A2



250-ITM68-B1A2



250-ITM68-D1A2



250-ITM68-C031



250-ITM68-C042



Examples of modules loaded with fiber patch cords



Item #	Description
250-ITM68-A2A2	Terminal Module, Regular 8P8C Plug with load bar, CAT6A, STP, Stranded, IP68
250-ITM68-B1A2	Terminal Module, Field-Terminatable Ruggedized Plug, CAT6A, STP, Solid, IP68
250-ITM68-D1A2	Terminal Module, Socket-to-IDC, CAT6A, STP, IP68
250-ITM68-C031	Terminal Module, OF Plug Holder, SC SX, Blank, IP68
250-ITM68-C042	Terminal Module, OF Plug Holder, LC DX, Blank, IP68
250-ICP68-B1A2	Coupler Module for 250-ITM68-B Terminal Modules, Socket-to-Socket, CAT6A STP, IP68

250-IOM/250-ITM Accessories & Ruggedized Patch Cords

Accessories for 250-IOM and 250-ITM Series

250-IOM68-0A-10



250-IOM68-0B



250-ITM68-0A-10



250-ITM68-0B-10



250-ITM68-0C-10



250-ITM68-0D-10



250-ITM68-0E



Item #	Description
250-IOM68-0A-10	Sealing Gasket Rubber for 250-IOM68-A Modules, Replacement, Pack of 10
250-IOM68-0B	Protective End Cap for Outlet Modules, IP68
250-ITM68-0A-10	Compression Fitting for 250-ITM68-B Modules, 8.5-mm (0.35-in) cable O.D., Pack of 10
250-ITM68-0B-10	Compression Fitting for 250-ITM68-A Modules, 6-mm (0.24-in) cable O.D., Pack of 10
250-ITM68-0C-10	Compression Fitting for 250-ITM68-C Modules
250-ITM68-0D-10	Sealing Gasket for 250-IOM68-D Modules, Rubber, Pack of 10
250-ITM68-0E	Protective End Cap for Plug Terminal Modules, IP68



Ruggedized Patch Cords - Armored OSP Cords



SIMPLEX, SC



DUPLEX, LC

SC-SC (SIMPLEX)	OF Class	1 m	2 m	3 m
	OM3	255-COA3F55IY1M	255-COA3F55IY2M	255-COA3F55IY3M
	SM APC	255-COAAF55IY1M	255-COAAF55IY2M	255-COAAF55IY3M
	SM UPC	255-COAU55IY1M	255-COAU55IY2M	255-COAU55IY3M
LC-LC (SIMPLEX)	OF Class	1 m	2 m	3 m
	OM3	255-COA3F77IY1M	255-COA3F77IY2M	255-COA3F77IY3M
	SM APC	255-COAAF77IY1M	255-COAAF77IY2M	255-COAAF77IY3M
	SM UPC	255-COAU77IY1M	255-COAU77IY2M	255-COAU77IY3M
SC-SC (DUPLEX)	OF Class	1 m	2 m	3 m
	OM3	255-COA3F66IY1M	255-COA3F66IY2M	255-COA3F66IY3M
	SM APC	255-COAAF66IY1M	255-COAAF66IY2M	255-COAAF66IY3M
	SM UPC	255-COAU66IY1M	255-COAU66IY2M	255-COAU66IY3M
LC-LC (DUPLEX)	OF Class	1 m	2 m	3 m
	OM3	255-COA3F88IY1M	255-COA3F88IY2M	255-COA3F88IY3M
	SM APC	255-COAAF88IY1M	255-COAAF88IY2M	255-COAAF88IY3M
	SM UPC	255-COAU88IY1M	255-COAU88IY2M	255-COAU88IY3M



Custom lengths available upon request

CABLE ASSEMBLIES » APPLICATION-SPECIFIC ASSEMBLIES

Simplex SC-APC assemblies



Item #	Description
255-CAAF55IY05M	Cable assembly, SC-APC to SC-APC, Simplex, TPU Jacket, 3-mm, Black, 5-m Length
255-CAAF55IY10M	Cable assembly, SC-APC to SC-APC, Simplex, TPU Jacket, 3-mm, Black, 10-m Length
255-CAAF55IY15M	Cable assembly, SC-APC to SC-APC, Simplex, TPU Jacket, 3-mm, Black, 15-m Length
255-CAAF55IY20M	Cable assembly, SC-APC to SC-APC, Simplex, TPU Jacket, 3-mm, Black, 20-m Length

Copper Coupler Modules

IP68-Rated



250-ICP68-A1A2 SECTIONAL VIEW



250-ICP68-C1A2



Features:

- Shielded RJ45 female-to-female coupler
- IP68 Rated - water and dust protection
- For harsh-industrial or outdoor environments
- RoHS-Compliant

Item #	Description
250-ICP68-A1A2	Coupler Module for 250-ITM68-A Terminal Modules, Socket-to-Socket, CAT6A STP, IP68
250-ICP68-B1A2	Coupler Module for 250-ITM68-B Terminal Modules, Socket-to-Socket, CAT6A STP, IP68
250-ICP68-C1A2	Coupler Module, IDC-to-IDC Splice, CAT6A STP, Panel Mounting, IP68



IP68

An IP68 rating means a device is both dust-tight and waterproof. Specifically, the "6" indicates complete protection against dust ingress, while the "8" signifies the device can withstand submersion in water deeper than 1 meter for a specified duration (usually 30 minutes to 1 hour).

IP68-Rated



040-381/C6/OWP



040-382/C6A/OWP



Features:

- Shielded RJ45 female-to-female coupler
- IP68 rated - water and dust protection
- Ideal for harsh-industrial and outdoor environments
- RoHS-Compliant

Item #	Description
040-381/C6/OWP	CAT5E and CAT6 RJ45 Outdoor Waterproof – Shielded Coupler, IP68
040-382/C6A/OWP	CAT6A RJ45 Outdoor Waterproof – Shielded Coupler, IP68



IP-RATED PRODUCTS


Fiber Coupler Modules



Environmental protection: IP68.

Features:

- Shielded RJ45 female-to-female coupler
- IP68 rated for water and dust protection
- Ideal for harsh industrial and outdoor environments
- RoHS compliant

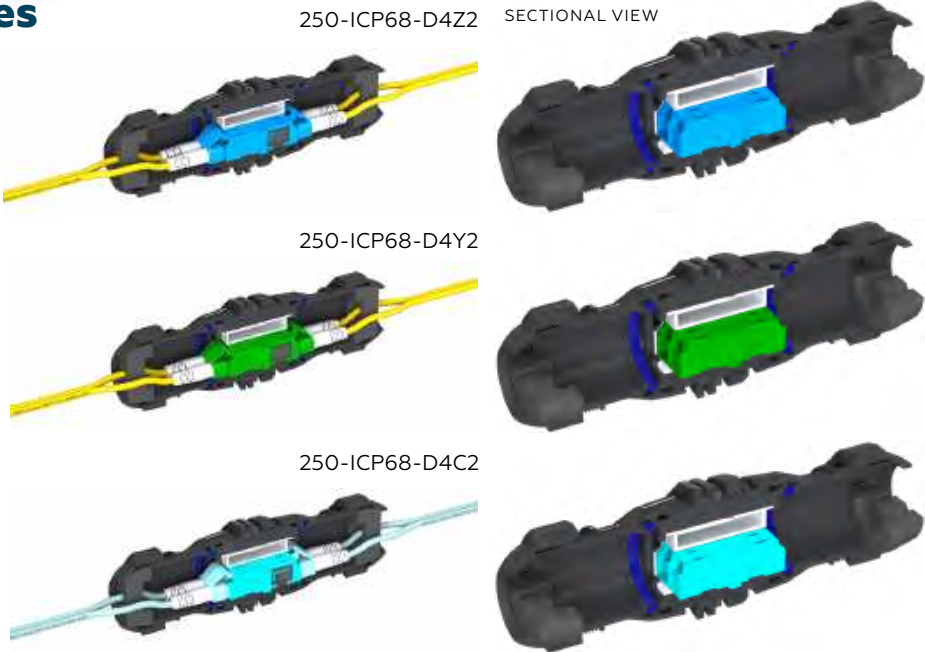

Item #	Description
250-ICP68-D4Z2	Coupler Module, OF Adapter, LC DX, Blue, Panel Mounting, IP68
250-ICP68-D4Y2	Coupler Module, OF Adapter, LC DX, Green, Panel Mounting, IP68
250-ICP68-D4C2	Coupler Module, OF Adapter, LC DX, Aqua, Panel Mounting, IP68



Accessories



Item #	Description
250-ICP68-OC0A	Surface Mounting Bracket for 250-ICP68-A/C/D Coupler Modules, 1-position
250-ICP68-OC0B	Surface Mounting Bracket for 250-ICP68-A/C/D Coupler Modules, 2-position
250-ICP68-OC0C	Surface Mounting Bracket for 250-ICP68-A/C/D Coupler Modules, 3-position
250-ICP68-0A-10	Sealing Gasket for 250-ICP68-A/C/D Coupler Modules, Internal, Rubber, Pack of 10
250-ICP68-0B-10	Sealing Gasket for 250-ICP68-A/C/D Coupler Modules, External, Rubber, Pack of 10
250-ICP68-DINR	DIN-Rail Clip



Ruggedized Field-Terminatable Plugs

Category 6A Ruggedized Field-Terminatable Plugs "toolless"

Item #	Description
252-RMP02-A2A10	Modular Plug, 8P8C, CAT6A, STP, Ruggedized, Field-Terminatable, Pack of 10
252-RMP02-A2B10	Modular Plug, 8P8C, CAT6A, STP, Ruggedized, Field-Terminatable, Slim-Profile, Pack of 10
252-RMP02-A2C10	Modular Plug, 8P8C, CAT6A, STP, Ruggedized, Field-Terminatable, 90-Deg Variable Direction, Pack of 10
012-024/10G	Modular Plug, 8P8C, CAT6A, STP, Field-Terminatable



252-RMP02-A2A



252-RMP02-A2B



252-RMP02-A2C



012-024/10G

Features:

- T568A/T568B wiring schemes
- Environmental Protection: IP20
- Wiring Schemes: T568A/T568B
- Mating Durability: Level 1, 750 cycles min
- Cable diameter: 5-9 mm
- Supports PoE



360°
coverage



CAT6A IP20 Coupler Modules




250-ICP20-C1A



250-ICP20-C2A



Includes wiring caps with color coding & zip ties



Includes copper foil & zip ties



Features:

- Category 6A per ANSI/TIA-568.2-D
- Conductor gauge: solid: 22-26 AWG
- Zinc alloy, nickel plating
- Environmental Protection: IP20



IP20

The IP code (IEC 60529) shows how well an enclosure resists solids and liquids. IP20 means:
2 → Protection from solid objects >12 mm (like fingers)
0 → No protection against liquids.

Best for dry indoor spaces (offices, data centers), not for humid or wet areas

IoT (Internet of Things)

- Ideal for high-bandwidth IoT applications like cameras, access control, and industrial sensors
- Protects against EMI/RFI interference, which is common in environments with lots of IoT electronics
- Good for structured enclosures in smart building hubs or industrial IoT cabinets

Item #	Description
250-ICP20-C1A	Coupler Module, IDC-to-IDC Splice, Compact , CAT6A STP, Panel Mounting, IP20
250-ICP20-C2A	Coupler Module, IDC-to-IDC Splice, Standard , CAT6A STP, Panel Mounting, IP20

DIN-RAIL PRODUCTS

DIN-Rail Keystone Module Holders - Stackable



251-DKH01-A1



251-DKH01-A1-A



251-DKH01-A1-B



Illustration of module holder loaded with keystone jack on din-rail



Features:

- Mounting: 35-mm DIN rail
- Labeling: paper insert with clear window
- Compatible with all Vertical Cable keystone inserts. **Note: this product will not work for fiber connections**

Item

Description

251-DKH01-A1	DIN-Rail Blank Keystone Module Holder, 35-mm, Plastic, Stackable, Grounding, Labeling, One Right Cover, Blank (for twisted-pair systems only)
251-DKH01-A1-A	Left Cover for 251-DKH01-A1
251-DKH01-A1-B	Right Cover for 251-DKH01-A1

DIN-rail Keystone Module Box - Distribution Box - Fiber and Copper Keystone Inserts

As delivered

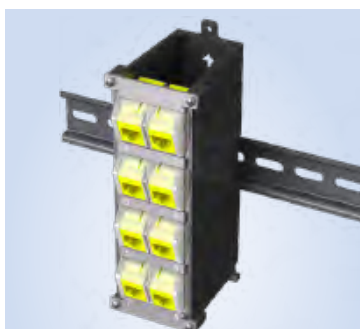


Illustration of module box loaded with keystone jacks on din-rail. Compatible with most keystone inserts

[V-Max Keystone Jacks](#)

[P54](#)

Features:

- Mounting: 35-mm DIN rail
- Port numbers (1 to 8), factory-marked; adhesive paper labels, custom labeling
- Compatible with all Vertical Cable keystone inserts. **Note: using fiber inserts watch the bending radius**



Item

Description

251-DCN01-A8A	Blank DIN-Rail Keystone Module Box, 35-mm, 8-position, Grounding, Swingable
---------------	---

DIN-rail Keystone Modules - Twisted-Pair Feed-Through Adapter



Illustration of adapter mounted on din-rail

Features:

- Category 6A per ANSI/TIA-568.2-D
- Dust covers
- Environmental Protection: IP20



Item

Description

251-DCM01-A1B	DIN-Rail Feed-Through Adapter, CAT6A, STP, 35-mm, Grounding
---------------	---

DIN-Rail to Equipment-Rack Adapter Bracket



Features:

- 19-inch rack/cabinet compatible (EIA-310-E)
- Up to 22 rack units
- 1.5 millimeter cold-rolled steel construction
- Black powder-coated finish
- Integrated 35 millimeter DIN rail
- Adjustable depth with multiple positions
- Front and rear cable management bars (not included)
- Plastic cable management rings included
- Dual grounding terminals

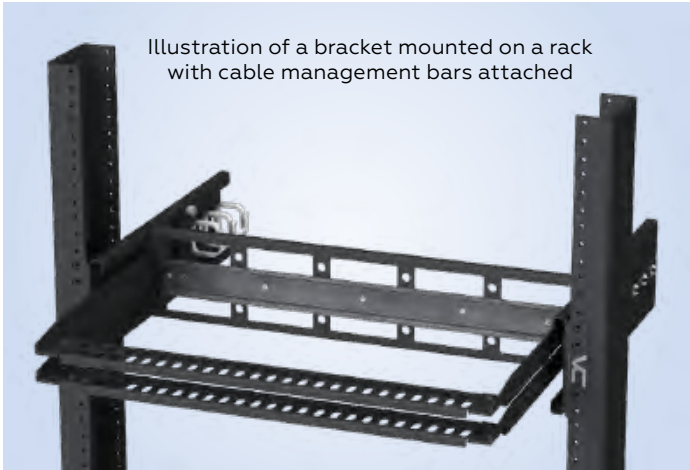


Illustration of a bracket mounted on a rack with cable management bars attached

[Cable management bars](#) [P69](#)

Item #	Description
251-ERA01B-2I	DIN-Rail to Equipment Rack Adapter Bracket, Foldable, 2-RMU, 8-in Depth


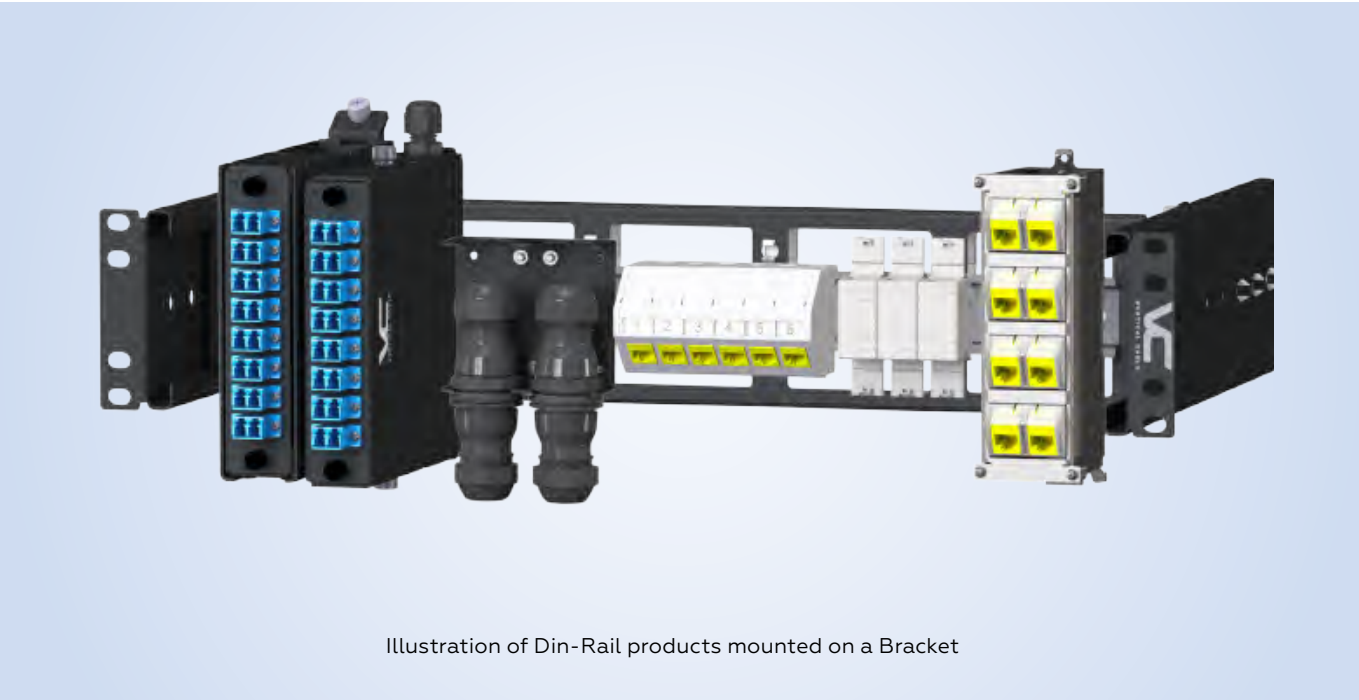


Illustration of Din-Rail products mounted on a Bracket

Industrial Switches

Ethernet Switches - DIN-Rail Mount Switches - Unmanaged, PoE Type 2




258-NAS2B-35001



258-NAS2B-38001



258-NAS2B-34201

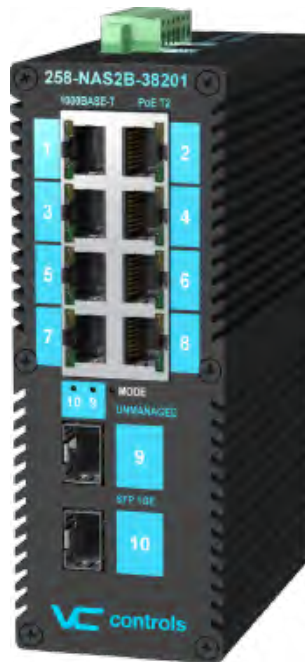

258-NAS2B-38201



Features:

- Unmanaged; PoE Type 2; redundant power input
- Ruggedized aluminum alloy housing
- Integral metal DIN-rail clip
- Multicolor LEDs
- Operating temperature: -40°C–85°C (-40°F–185°F)
- Power input: 12 VDC–52 VDC
- Power consumption: 5 W max (non-PoE mode)
- FCC CFR47 Part 15
- Directive 2011/65/EU (RoHS2)
- Lifetime limited warranty

Item #	Description
258-NAS2B-35001	Industrial Ethernet Switch, 5 TP Ports, 1000 Mbps, Unmanaged, PoE Type 2
258-NAS2B-38001	Industrial Ethernet Switch, 8 TP Ports, 1000 Mbps, Unmanaged, PoE Type 2
258-NAS2B-34201	Industrial Ethernet Switch, 4 TP Ports, 2 SFP Ports, 1000 Mbps, Unmanaged, PoE Type 2
258-NAS2B-38201	Industrial Ethernet Switch, 8 TP Ports, 2 SFP Ports, 1000 Mbps, Unmanaged, PoE Type 2

Power supply is not included

Industrial Switches & SFP Transceivers

UNMANAGED Ethernet Switches - Comparison Guide



PART NUMBER		258-NAS2B-38201	258-NAS2B-38001	258-NAS2B-35001	258-NAS2B-34201
Switch					
Configuration	RJ-45 Port	8 × 10/100/1000 Mbps	8 × 10/100/1000 Mbps	5 × 10/100/1000 Mbps	4 × 10/100/1000 Mbps
	SFP Port	2 × 1 Gbps	-	-	2 × 1 Gbps
	PoE Port	8	8	4	4
Electrical, PoE	PoE Budget (maximum wattage)	240 W		120 W	
	PoE Type	Type 2			
	Output Power	IEEE 802.3af: 15.4 W max			
		IEEE 802.3af: 30.0 W max			
	Output Voltage	48 VDC –57 VDC			
PoE Type Detention	Dynamic Auto Power Allocation				

SFP TRANSCEIVERS

Multimode

258-SFPA1G041K5



258-SFPC10G41K3



Singlemode

258-SFPA1G04320



258-SFPC10G4310



Features:

- Type: SFP and SFP+, hot-pluggable
- Meets the SFP Multi-Source Agreement (MSA)

Item

Description

258-SFPA1G041K5	SFP Transceiver Module, SFP, 1Gb/s, LC, 850 nm, 500 m, DDM
258-SFPA1G04320	SFP Transceiver Module, SFP, 1Gb/s, LC, 1310 nm, 20 km, DDM
258-SFPC10G41K3	SFP Transceiver Module, SFP+, 10Gb/s, LC, 850 nm, 300 m, DDM
258-SFPC10G4310	SFP Transceiver Module, SFP+, 10Gb/s, LC, 1310 nm, 10 km, DDM



INDEX

A

Access Control Cable **42**
Audio Cable **32**
Adapters
 LGX Adapter Plates **100**
 Fiber Adapters **102**
 Cable Entry Adapters **99**
Anchor Clamps (OSP) **116**
Array Splice Cassette **110**

B

Bars, Cable Management **92**
Blades, Replacement for
 Cleavers **108**
Blades, Replacement for
 Crimping tools **80**
Blank Patch Panels **66**
Boots, Slip-on **79**
Brackets, OSP **116**
Brush Panel **70**

C

Cable Ties **123**
Cable Entry Adapters **99**
CAT6A **8**
 Couplers **56, 57**
 Jacks **54**
 Patch Cords **71, 73**
 Patch Panels **64, 65**
 Plugs **78**
 Surface Mount Boxes **63**
 Outlet modules **145**
CAT6 **14**
 Boots **79**
 Couplers **56, 57**
 Jacks **54**
 Junction Boxes **57**
 Patch Cords **74**
 Patch Panels **64, 65**
 Plugs **78**
 Surface Mount Boxes **63**
CAT5E **22**
 Boots **79**
 Couplers **56, 57**
 Jacks **54**
 Junction Boxes **57**
 Multipair **25**
 Outdoor **27**
 Messenger **28**
 Patch Cords **75**
 Patch Panels **64, 65**
CAT3 **30**
Cassette/Tray **110**
Coaxial Cable **34**
Coax Connectors **77**
Coax Inserts **77**
Connectivity Node **98**
Control Cable **42**
Crimping Tools **80**

D

D-Rings **124**
DIN-rail products **150**
Distribution Box **150**
Dry Wall Brackets **60**

E

Epoxy Plugs **107**
EZ Mount DIN-Rail
Cassette **99**

F

Fan-Out Kits **111**
FC Adapters **103**
Feedthrough Wall Plates **60**
Fiber Optics *See Optical
Fiber Systems*
Fiber Cleaver **108**
Filler Panels **70**
Fire Alarm Cable **48**

H

Harsh Environment
Systems **144**
HDMI Cables **76**
High Strand Audio Cable **32**
Horizontal Wire Manager **126**
Hook and Loop Straps **123**

I

Industrial and Harsh
Environment Systems **144**
 CAT6A Plug Terminal
 Modules **145**
 CAT6A Coupler
 Modules **145**
 OF Adapter Coupler
 Modules **148**
 IP-Rated Boxes **144**
 Ruggedized Products **146**
Inserts
 Keystone Inserts **77**
 Keystone Modules **90**
Installation Accessories **116**
IP-Rated Products **148**
I-Punch Tool **80**
Insertion/Extraction Tool
(LC Plug) **118**

J

Jacks, Keystone **54**
J-Hooks **124**
Junction Box **60**

L

LC Adapters **102**
LGX Adapter Plates **100**
LGX Cassettes **104, 105**
Light Source **119**

M

Mechanical Splices **111**
Mechanical Splice Holders **111**
Mid-size Wall Plates **61**
Mini Patch Panels **64**
Modular Plugs **78**
Mounting Bases **123**
MPO Adapters **101**
MPO Pre-Connectorized
Solution **104**

O

One-Click Pen Tool **109**
Optical Fiber Systems **90**
 Optical Fiber Cable **84**
 ISP Tight-buffer **86**
 OSP Loose-Tube **84**
 LGX Adapter Plate **100**
 Rack-Mount Panels **92**
 Rack-Mount Enclosure **93**
 Wall-Mount Enclosure **94**
 Surface- and Wall-
 Mount Enclosure **96**
 Splice Closures **115**
 Fiber Patch Cords **113**
 Ruggedized Patch Cords **146**
 Tool Kits **108**
 Inspection Tools **119**

P

Panel Covers **64, 65**
Patch Cords **71**
Patch Panels **64, 65**
Phone Cords **30**
Phone Wire **31**
Pigtails **112**
Plenum-Rated Cable Ties **123**
Plugs **78**
Power Meter **119**
Power Strip **127**
Professional Aramid Fiber
Scissors **118**
Punch Down Blocks
(66 Block) **31**
Punch Down Tool **80**

R

Raceways **122**
Racks **132**
RG6 Coax Cable **34**
RG59 Coax Cable **39**
RG11 Coax Cable **40**
RJ45 Plugs **78**

S

SC Adapters **102**
Screws **127**
Security & Communication
Cable **44**
 Control Cable **42**
Self-Gripping Cable Ties **123**
Sheath Cutter **118**
Shelves **140**
Shielded Patch Panels **65**
Sleeves **111**
Slim Type Patch Cords **73**
Splice Closures (OSP) **115**
Splicing Stage **97**
Splice-on Plugs **106**
Splice Holders **111**
Splice Trays/Cassettes **110**
Splicing Tools **108**
Splicing Cassettes **105**
ST Adapters **103**
Stainless Steel Wall Plates **61**
Steel Banding (OSP) **117**
Surface Mount Box **62**
Surface Raceways and
Accessories **122**

T

Telephone Cords **31**
Telephone Wire **31**
Termination Instructions
 Shielded Keystone Jacks **56**
 Shielded Patch Panels **65**
Test Leads **119**
Testers **80**
Tension Clamps (OSP) **116**
Tools **80**
Three-Step Fiber Stripper **118**

V

Vertical Wire Managers **113**
VFL (Visual Fault Locator) **119**

W

Wall-Mounts **132**
Wall-Mount Brackets **128**
Waterproof Couplers **147**
See IP-Rated Products
Wall Plates **59**
Wire Managers **131**





Southern Electronics Supply, Inc.
345 followers

Less than 2 weeks away for the biggest event in sports.
300,000 Ft of Vertical Cable being picked up and installed for the Super Bowl a few blocks away.



FOLLOW
@verticalcable
on social media

netlioncomm



gbittech



gbittech



allgreenlightsllc



mtcnetworks
Chicago, Illinois



libertasray



localectricsupply
Mesa, Arizona



lowvoltify
Low Volt AC DC



**JOIN OFFICIAL
VC INSTAGRAM
PAGE - SCAN**

ohiofit



allaccesscommunications



2secureinc
Lemont, Illinois



intellitalk
Irvine, California



