



VERTICAL CABLE

CAT5E & CAT6 JUNCTION BOXES

UNSHIELDED

040 SERIES


DESCRIPTION

CAT5E & CAT6 Junction Box, White, T568A and T568B Standards


FEATURES

- Compatible with 110 type termination tools
- Supports PoE Type 4 IEEE 802.3bt up to 90-100 W
- Supports T568A and T568B wiring schemes
- Includes screws and adhesive mounting tape
- Fire-retardant housing for added safety
- Durable high-impact ABS construction
- Suitable for 22-26 AWG solid wire
- Weight: 0.09 lb. (0.04 kg)

CAT 5E



CAT 6



PART NUMBERS

040-371/C5J/WH	040-372/C6J/WH
----------------	----------------

MATERIAL

Jack Housing:

ABS, UL94V-0

IDC

Housing:

PC + Glass Fiber, UL 94V-2

Terminal:

Phosper Bronze with Tin Plating

PCB

FR4, UL 94V-0

ENVIRONMENTAL

Operating Temperature:





-10 °C to 60 °C

PERFORMANCE

Meets or exceeds ISO/IEC 11801, ANSI/TIA/EIA 568.2-D

DIMENSIONS

Height:	0.92 in. (23.4 mm)
Width:	1.33 in. (33.7 mm)
Length:	2.43 in. (61.6 mm)

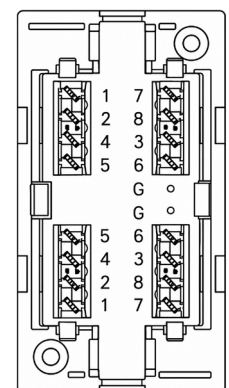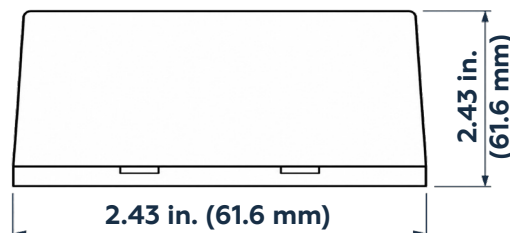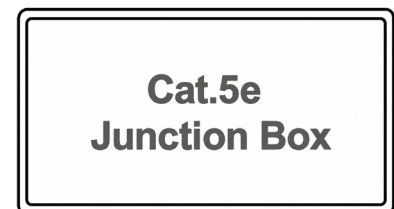

Florida (HQ)
800-749-2447

California
951-696-7772

New York
845-391-8318

Texas
713-322-7242

verticalcable.com

This specification sheet is subject to change without notice.



RoHS

Rev. 08/2026