




VERTICAL CABLE

DESCRIPTION


LGX Adapter Plates, Transversal/
Lateral Mounting, SC/LC Connectors.

FEATURES

- LGX-compatible form factor for universal fit
- Durable 1.5 mm aluminum construction with black powder coating
- Available in singlemode and multimode configurations
- Flanged adapters (screw retaining) or flangeless adapters (spring retaining)
- Precision cutouts ensure secure adapter alignment
- Compatible and meets Telcordia GR-326-CORE standards
- Weight: 0.07 lb. (0.03 kg)

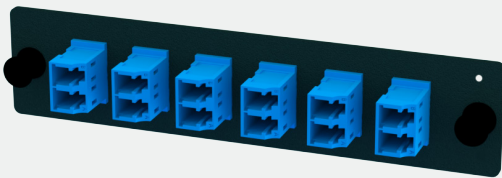

264-LAP04-1B6Z1

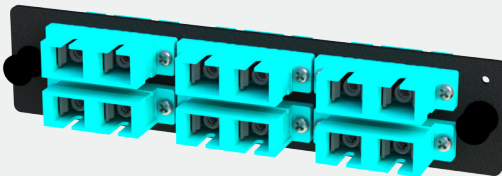

264-LAP03-2B6C1

LGX ADAPTER PLATES

FLANGED/FLANGELESS SINGLEMODE/MULTIMODE

264-LAP SERIES

CHARACTERISTICS

Adapters:	SC				LC			
								
Format:	SX NF	SX MF	DX NF	DX MF	DX NF	DX MF	QX NF	QX MF
Fiber Count:	1	1	2	2	2	2	4	4
Interface Standard:	IEC 61754-4				IEC 61754-20			
Insertion Loss (IL):	0.3 dB or lower (when used with standard-compliant plugs)							
Return Loss (RL):	UPC: 55 dB or more (when used with standard-compliant plugs) APC: 65 dB or more (when used with standard-compliant plugs)							

Fiber Type Compatibility: SM 9/125, MM 50/125, MM 62.5/125

Plug Type Compatibility: PC, UPC, APC

ADAPTER CONSTRUCTION

One-piece or two-piece design

Split Zirconia ceramic sleeves (*single-fiber adapters*)

Dust-proof plugs (*with integral key in K-SW adapters*)

RETENTION

Flangeless Adapters: Chatter-proof three-sided or two-sided spring

Flanged Adapters: Flanges with holes for two self-tapping screws
(*optional plastic integral latches or two-sided metal springs*)

PLATE MATERIALS

Plate: 1.5-mm (15-GA) aluminum alloy

Finish: Black Powder Coating

Panel Fasteners: Nylon/Acrylonitrile Butadiene Styrene (ABS)

ENVIRONMENTAL

Operating Temperature: -20 °C to 70 °C (-4 °F to 158 °F)

Operating Humidity: ≤95 % RH Non-condensing

COMPLIANCE

Regulation (EC) No 1907/2006 (REACH)

Directive 2011/65/EU Am. 2015/863/EU (RoHS2)

ANSI/UL 94 V-0 (*plastic parts*)

Telcordia GR-326-CORE

DIMENSIONS

Height:	1.14 in. (29 mm)
Width:	5.12 in. (130 mm)
Depth (SC,LC):	1.2 in. (30 mm)
Mounting Hole Dist.	4.65 in. (118 mm)

Florida (HQ)
800-749-2447

California
951-696-7772

New York
845-391-8318

Texas
713-322-7242

verticalcable.com

This specification sheet is subject to change without notice.

VC fiber

Rev. 08/2026