



VERTICAL CABLE

DESCRIPTION

Array Splice Cassettes, 6, 8, 12-Positions.
Up to 144-Fibers. Stackable.

FEATURES

- Aluminum alloy body
- Fusion splicing
- Heat-shrink protection sleeves
- Delivered as kit (see page 2)
- Compatible with 267-RES, 267-REB, 268-STD, 268-EZX, and 268-EZV series
- Telcordia GR-771-CORE compliant
- ANSI/UL 94 V-2; RoHS



ARRAY SPLICE CASSETTES

Up to 12-positions, 144-fibers

265-CAS10 SERIES

PART NUMBERS

265-CAS10-F06A2	6-Position, up to 72 Splices/Fibers
265-CAS10-F08A2	8-Position, up to 96 Splices/Fibers
265-CAS10-F12A2	12-Position, up to 144 Splices/Fibers

ENVIRONMENTAL & PHYSICAL CHARACTERISTICS

Cartridges	6	8	12
Fiber Capacity	non-stacked: up to 36 splices/ fibers stacked: up to 72 splices/ fibers	non-stacked: up to 48 splices/ fibers stacked: up to 96 splices/ fibers	non-stacked: up to 72 splices/ fibers stacked: up to 144 splices/ fibers
Compatible Splicing	Fusion splice, heat-shrink protection sleeves		
Operating Temperature	-20°C to 70°C (-4°F to 158°F)		
Operating Humidity	≤ 95% RH non-condensing		
Sleeve Shrinking temp.	≥ 100°C (212°F)		
Sleeve size	outer diameter: 0.1 in. (2.5 mm) length: 1.6 in. (40 mm)		
Mounting	2 × M3×0.5×5 CTS machine screws; 2 × M3×0.5 hex nuts, thin; mounting hole distance: 1.65 in. (42 mm) etc.		
Materials	base, cover, cartridge: aluminum alloy; finish: black powder coating; splice holder: PP (polypropylene); protection sleeves: external tubing: PAO (polyolefin); internal tubing: EVA (ethylene-vinyl acetate); rod: stainless steel.		
Part Number	265-CAS10-F06A2	265-CAS10-F08A2	265-CAS10-F12A2
Dimensions	W: 2.8 in. (70 mm) D: 5.1 in. (130 mm) H: 1.2 in. (30 mm)	W: 3.5 in (90 mm) D: 5.1 in (130 mm) H: 1.2 in (30 mm)	W: 4.9 in (125 mm) D: 5.1 in (130 mm) H: 1.2 in (30 mm)



Florida (HQ)
800-749-2447

California
951-696-7772

New York
845-391-8318

Texas
713-322-7242

verticalcable.com




This specification sheet is subject to change without notice.

Rev. 08/2026

STANDARDS & COMPLIANCES

Telcordia GR-771-CORE
ANSI/UL 94 V-2
RoHS

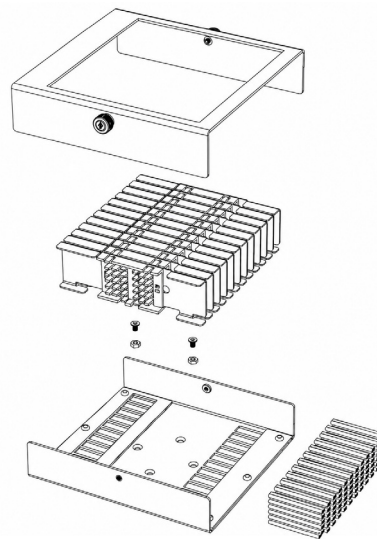

265-CAS10-F06A2
(DELIVERED ASSEMBLED)

■ KIT INCLUDES:

- 1x Base
- 1x Cover
- 6x Cartridges
- 72x splice protection sleeves
- 2x M3 CTS machine screws
- 2x M3 hex nuts
- 1x shipping box

■ NOT INCLUDED:

- Pigtails



265-CAS10-F08A2
(DELIVERED ASSEMBLED)

■ KIT INCLUDES:

- 1x Base
- 1x Cover
- 8x Cartridges
- 96x splice protection sleeves
- 2x M3 CTS machine screws
- 2x M3 hex nuts
- 1x shipping box



265-CAS10-F12A2
(DELIVERED ASSEMBLED)

■ KIT INCLUDES:

- 1x Base
- 1x Cover
- 12x Cartridges
- 144x splice protection sleeves
- 2x M3 CTS machine screws
- 2x M3 hex nuts
- 1x shipping box



Florida (HQ)
800-749-2447

California
951-696-7772

New York
845-391-8318

Texas
713-322-7242

verticalcable.com

This specification sheet is subject to change without notice.



Rev. 08/2026