



VERTICAL CABLE

CAT6A JUNCTION BOX

SPLICE BOX (SHIELDED)

040-375/C6AJ/S

DESCRIPTION

CAT6A Junction Box, Shielded, Splice Box.

FEATURES

- Durable ABS + PC Flame-Resistant Housing, UL 94V-0 Rated
- Shield: Nickel-plated SPCC steel cover (0.5 mm thick)
- Corrosion-resistant
- Compatible with 110 & Krone termination tools
- ANSI/TIA/EIA 568-C.2, ISO/IEC 11801 compliant
- RoHS Compliant
- Master bag includes 50 individually packed pieces (can be sold separately)
- Weight per unit - 0.13 lbs



DIMENSIONS

Height: 0.94 in. (24 mm ± 0.2)
Width: 1.37 in. (34.9 mm ± 0.2)
Length: 2.47 in. (62.8 mm ± 0.2)

MATERIAL

Jack Housing: ABS + PC, UL 94V-0
Metal Cover: SPCC, Nickel-Plated
0.02 in. (0.5 mm) thickness
IDC Housing: PC, UL 94V-2
IDC Terminal: Phosphor Bronze, Tin-Plated
Cable Holder: Phosphor Bronze, Nickel-Plated
0.02 in. (0.5 mm) thickness
PCB: FR4, UL 94V-0

IDC PERFORMANCE






T568A & T568B wiring
Compatible with 22-26 AWG
stranded and solid copper / Vertical
Cable 110 & Krone punch down tools

ENVIRONMENTAL

Operating Temperature: -10 °C to 60 °C

PERFORMANCE RATING

Meets or exceeds ANSI/TIA/EIA
568-C.2, ISO/IEC 11801

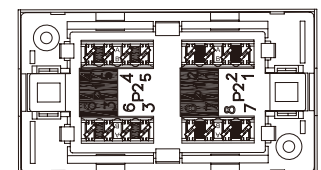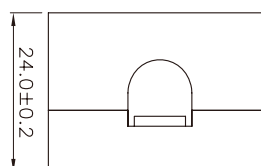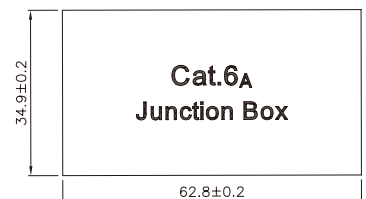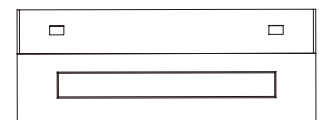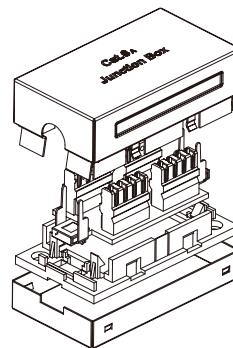

Florida (HQ)
800-749-2447

California
951-696-7772

New York
845-391-8318

Texas
713-322-7242

verticalcable.com

This specification sheet is subject to change without notice.



RoHS

Rev. 09/2026