



VERTICAL CABLE

DESCRIPTION

**RG6 Standard Shield,
18 AWG Solid CCS Conductor,
Aluminum Foil**

FEATURES

- High-Grade RG6 Coaxial Cable
- Fully Sweep-Tested to 3000MHz
- 18AWG Solid Copper-Clad Steel
- White PVC Jacket
- RoHS Compliant
- Supplied in 1000 ft Pull Box
- Weight: 34 lb. (15 kg)



COAXIAL CABLE

RG6 STANDARD SHIELD

18 AWG

107-1031WH6S1BX

CONSTRUCTION

Conductors: 1
Shape: Round
Aluminum Foil: Yes
Aluminum Foil Shield:

CONDUCTORS

DC Resistance: Copper Clad Steel
($<$) 120 Ohms/km
Trade Size: 18 AWG

INSULATION

Insulation Diameter: Dielectric Foam PE
0.18 in. (4.60 mm)
Insulation Color: White

JACKET


Outer Diameter: Polyvinyl Chloride (PVC)
0.27 in. (6.90 mm)
Marking: 18AWG CCS RG6/U 3.0GHz ROHS V2094P11369
XXXXFT 3320110510203

MECHANICAL

Temperature Rating: 75° C
Sparker Test: 2500VAC
Impedance: 75 Ohm
Capacitance: 52 pF/m
Velocity of Propagation: 85%
Return Loss: 23 dB Min (5-2300 MHz)
Bending Radius MINI.: 2.72 in. (69 mm)

SAFETY

Voltage Rating: 300 V RMS

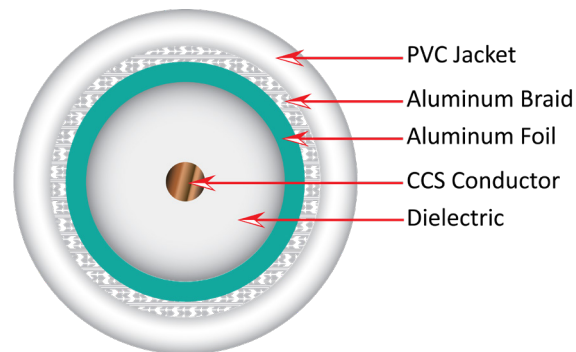

Florida (HQ)
800-749-2447

California
951-696-7772

New York
845-391-8318

Texas
713-322-7242

verticalcable.com

This specification sheet is subject to change without notice.



Rev. 09/2026