



VERTICAL CABLE

SECURITY CABLE

18 AWG 6 CONDUCTORS

STRANDED (SHIELDED)

211-186ST/S/GY

DESCRIPTION

**Security Cable, Shielded, 18 AWG
6 Conductor Stranded Bare Copper,
1000 ft., Wooden Spool, Grey**

FEATURES

- Conductor: Stranded Bare Copper
- Non-Plenum: CM CL2
- Sequential Length Markings on Jacket
- 1000 ft. Wooden Spool
- ETL-listed, RoHS-Compliant
- 1000 ft. Pull Box
- Weight: 55 lb. (25 kg)

APPLICATIONS

- Indoor Remote Control of Security
- Intercom Systems
- Sound / Audio Systems
- Door Controllers, Proximity Sensors, Key Pads, Access Control, Smoke Detectors
- Indoor Applications

CONSTRUCTION

Conductor Count:	6
Shape:	Round
Rip Cord:	Yes
PE Tape:	Yes
Drain Wire (TC):	7/0.20
Aluminum Foil:	Yes

CONDUCTORS

Trade Size:	18 AWG
Stranding:	16/0.24 mm
Strand Diameter:	0.02 in. (0.51 mm)

INSULATION

Outer Diameter:	Polyvinyl Chloride (PVC) 0.07 in. (1.78 mm)
Insulation Color:	Red, Black, White, Green, Brown, Blue

JACKET


Average Thickness:	Polyvinyl Chloride (PVC) 0.02 in. (0.51 mm)
Outer Diameter:	0.25 in. (6.35 mm)
Marking:	VERTICAL 5024318 c(ETL)us CM/CL2 18AWG 6C STRANDED SHIELDED 75C SUN RES RoHS V294P400333 XXXXFT

MECHANICAL

Temperature Rating:	75° C
---------------------	-------

SAFETY

Voltage Rating:	300 V RMS
-----------------	-----------

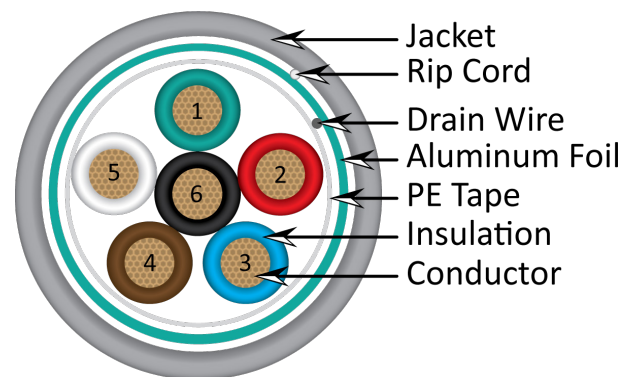

Florida (HQ)
800-749-2447

California
951-696-7772

New York
845-391-8318

Texas
713-322-7242

verticalcable.com

This specification sheet is subject to change without notice.



RoHS



Intertek

Rev. 10/2026