VERTICAL CABLE

LED CABLE

16 AWG / 6 CONDUCTOR
CL3R RATED

213-166ST/5BK

DESCRIPTION

**LED Cable, CL3R Rated,
16 AWG × 6 Stranded Bare Copper
Conductors, 500 ft., Spool, Black**

FEATURES

- CL3R Rated cable
- 6 × 16 AWG stranded bare copper conductors
- Durable PVC jacket
- Designed for indoor LED and low-voltage installations
- ETL Listed
- RoHS Compliant
- 500 ft. Spool
- Weight: 43.4 lb. (19.7 kg)

APPLICATIONS

- LED strip and architectural lighting
- Cove and accent lighting
- Cabinet and under-cabinet lighting
- Signage and display lighting
- Multi-conductor LED lighting systems
- General low-voltage lighting applications



CONSTRUCTION

Conductors:	6
Ripcord:	Yes

CONDUCTOR

	Stranded Bare Copper
Trade Size:	16 AWG
Conductor Size:	26 × 0.01 in. (26 × 0.254 mm)

INSULATION

	PVC
Insulation Diameter:	0.08 in. (2.10 mm)
Nominal Thickness:	0.01 in. (0.30 mm)
Insulation Color Coding:	Black, Blue, Green, Red, Yellow, White

JACKET


	PVC
Jacket Diameter:	0.29 in. (7.4 mm)
Nominal Thickness:	0.02 in. (0.55 mm)
Color:	Black
Marking:	VERTICAL LED CABLE 16AWG 4C 5024318 (ETL) CL3R 75C V2094P400333 XXXFT


ELECTRICAL

Voltage Rating:	300 V_{RMS}
Nominal Conductor DCR:	≤13.7 Ohm/km

ENVIRONMENTAL

Operating Temperature:	-20°C ~ +75°C
Flame Test:	CL3R

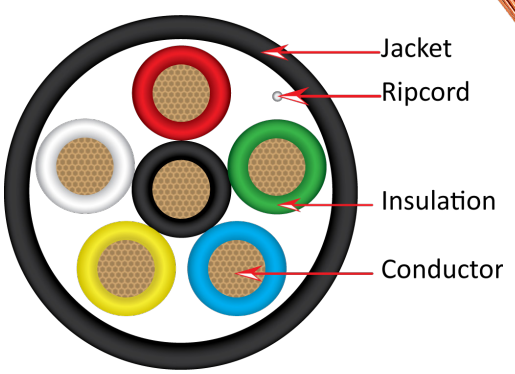

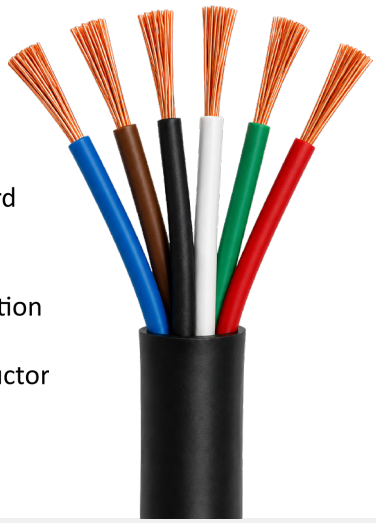

Florida (HQ)
800-749-2447

California
951-696-7772

New York
845-391-8318

Texas
713-322-7242

verticalcable.com

This specification sheet is subject to change without notice.

RoHS

Intertek

Rev. 10/2026