



VERTICAL CABLE

DESCRIPTION

Array Splice Cassettes, 6, 8, 12-Positions,
Up to 144-Fibers, Stackable

FEATURES

- Aluminum alloy body
- Fusion splicing
- Delivered as kit (see page 2)
- Compatible with 267-RES, 267-REB, 268-STD, 268-EZX, and 268-EZV series
- Telcordia GR-771-CORE Compliant
- ANSI/UL 94 V-2; RoHS



ARRAY SPLICE CASSETTES

UP TO 12-POSITIONS | 144-FIBERS

265-CAS10 SERIES

PART NUMBERS

265-CAS10-F06A2	Ⓢ (6-Position)	Ⓣ (Up to 72 Splice/Fibers)
265-CAS10-F08A2	Ⓢ (8-Position)	Ⓣ (Up to 96 Splice/Fibers)
265-CAS10-F12A2	Ⓢ (12-Position)	Ⓣ (Up to 114 Splice/Fibers)

ENVIRONMENTAL & PHYSICAL CHARACTERISTICS

Cartridges:	6	8	12
Fiber Capacity:	Non-Stacked: Up to 36 splices/fibers Stacked: Up to 72 splices/fibers	Non-Stacked: Up to 48 splices/fibers Stacked: Up to 96 splices/fibers	Non-Stacked: Up to 72 splices/fibers Stacked: Up to 144 splices/fibers
Compatible Splicing:	Fusion splice, heat-shrink protection sleeves		
Operating Temperature:	-20°C to 70°C (-4°F to 158°F)		
Operating Humidity:	≤ 95% RH non-condensing		
Sleeve Shrinking Temp.:	≥ 100°C (212°F)		
Sleeve Size:	Outer Diameter: 0.1 in. (2.5 mm) Length: 1.6 in. (40 mm)		
Mounting:	2 × M3×0.5×5 CTS machine screws; 2 × M3×0.5 hex nuts, thin; Mounting Hole Distance: 1.65 in. (42 mm) ctc.		
Materials:	Base, Cover, Cartridge: aluminum alloy; Finish: black powder coating; Splice Holder: PP (polypropylene); Protection Sleeves: external tubing: PAO (polyolefin); Internal Tubing: EVA (ethylene-vinyl acetate); Rod: stainless steel.		
Dimensions:	W: 2.8 in. (70 mm) D: 5.1 in. (130 mm) H: 1.2 in. (30 mm)	W: 3.5 in (90 mm) D: 5.1 in (130 mm) H: 1.2 in (30 mm)	W: 4.9 in (125 mm) D: 5.1 in (130 mm) H: 1.2 in (30 mm)
Weight:	7.1 oz. (200 g)	8.5 oz. (240 g)	11.3 oz. (320 g)



GOLD HONOREE

Florida (HQ)
800-749-2447

California
951-696-7772

New York
845-391-8318


Texas
713-322-7242

verticalcable.com



This specification sheet is subject to change without notice.

Rev. 10/2026

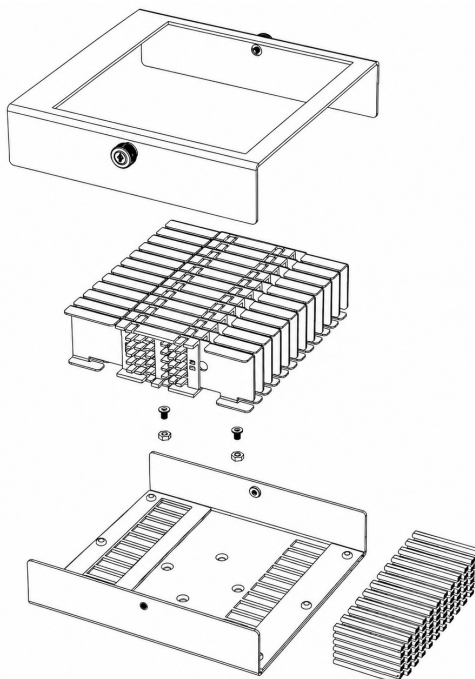

265-CAS10-F06A2
(DELIVERED ASSEMBLED)

- 1x Base
- 1x Cover
- 6x Cartridges
- 2x M3 CTS Machine Screws
- 2x M3 Hex Nuts
- 1x Shipping Box

- Pigtails



265-CAS10-F08A2
(DELIVERED ASSEMBLED)

- 1x Base
- 1x Cover
- 8x Cartridges
- 2x M3 CTS Machine Screws
- 2x M3 Hex Nuts
- 1x Shipping Box



265-CAS10-F12A2
(DELIVERED ASSEMBLED)

- 1x Base
- 1x Cover
- 12x Cartridges
- 2x M3 CTS Machine Screws
- 2x M3 Hex Nuts
- 1x Shipping Box

