VERTICAL CABLE

OPTICAL FIBER SURFACE-MOUNT BOX

STANDARD-SERIES | LGX | ONE-POSISTION

268-SMB01-1A1

DESCRIPTION

Optical Fiber Surface-Mount Box, Standard-Series, LGX, One-Position

FEATURES

- Holds one (1) LGX adapter plate (up to 24 fibers)
- Durable 15-GA aluminum alloy, Black Powder-Coated Finish
- Single Door, Panel Fasteners
- Cable management: Two cable entry openings; two mounting positions for MPO adapters; cable anchor points; set of cable ties.
- Fiber management: anchor points, rings.
- Includes:
  - 1× Box with cover
  - 2× Panel fastener sets of cover latching
  - 2× nylon cable ties



CHARACTERISTICS

Materials:	0.06 in. (1.5 mm) (15-GA) aluminum alloy; Black Powder Coating
Access:	Single Door, Panel Fasteners ("push-pins"/"plunger locks")
Mounting:	Surface/wall

CAPACITY

Adapter Plates:	One LGX Adapter Plate
Optical Fibers:	Up to 24 optical fibers
Splice Trays:	Up to one 12-fiber splice holders

ENVIRONMENTAL


Operating Temperature:	-20 °C–+70 °C (-4 °F–+158 °F)
Operating Humidity:	≤95 % RH non-condensing

DIMENSIONS

Height:	1.6 in. (40.64 mm)
Width:	6.3 in. (160.02 mm)
Depth:	1.3 in. (33.02 mm)
Weight:	7 oz. (200 g)

VERTICAL CABLE ACCESSORIES

1. *264-LAP Series* LGX Adapter Plates
2. *268-ACC03-11-00* Splicing Stage
3. *265-HLD01-2B-00* Optical Fiber Splice Holder, Adhesive Mounting
4. *265-SLV01-3A-1H* Optical Fiber Splice Protection Sleeve

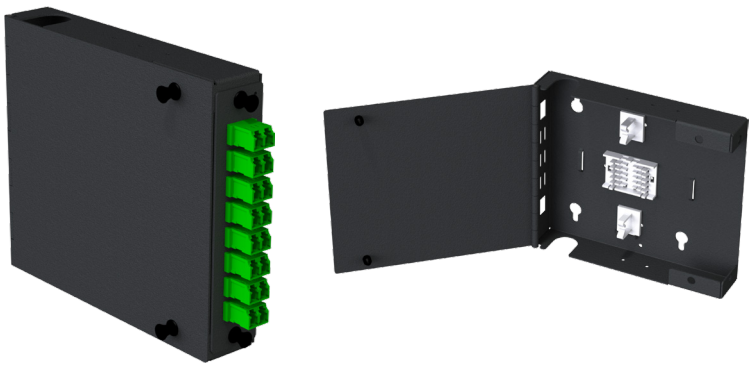

**Accessories NOT INCLUDED*

Florida (HQ) 800-749-2447	California 951-696-7772
New York 845-391-8318	Texas 713-322-7242

verticalcable.com

This specification sheet is subject to change without notice.

Rev. 10/2026