

Installation Accessories

Furcation Tubing


- 269-FTL11-A[x]1KM Optical Fiber Furcation Tubing, SX, 2.0 mm/0.9 mm/0.25 mm, PVC, 1,000-m (3,050-ft) Bundle
- 269-FTL11-A[x]1HM Optical Fiber Furcation Tubing, SX, 2.0 mm/0.9 mm/0.25 mm, PVC, 100-m (305-ft) Bundle
- 269-FTL11-A[x]10M Optical Fiber Furcation Tubing, SX, 2.0 mm/0.9 mm/0.25 mm, PVC, 10-m (30.5-ft) Bundle

Substitute [x] for tubing color in PN with:

- 0 White
- 1 Blue
- 2 Orange
- 3 Green
- 4 Brown
- 5 Slate
- 6 Red
- 7 Black
- 8 Yellow
- 9 Violet
- A Rose
- B Aqua

CHARACTERISTICS


	269-FTL11-A _n 1KM	269-FTL11-A _n 1HM	269-FTL11-A _n 10M
Tube size:	2 mm (0.08 in)		
Tube construction:	outer tube (OD: 2-mm) – aramid yarn – inner tube (OD: 0.9-mm, ID: 0.25-mm)		
Fiber buffer diameter:	250 μm/900 μm		
Material:	polyvinylchloride (PVC)		
Tube color:	ANSI/TIA-598		
Length:	1 km (3,280 ft)	100 m (328 ft)	10 m (33 ft)
Length markings:	1-m step (meter marks)		
Packing:	Bundle – PE bag – box	Bundle – PE bag	Bundle – PE bag

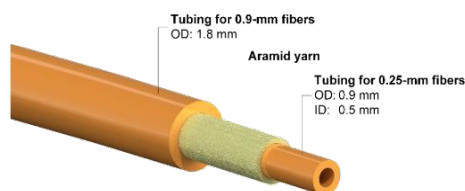

Fan-out Kits

- 269-FOK12-58B[x]C Optical Fiber Fan-out Kit, 12-Fiber, 12-Color Tubing
- 269-FOK12-58B[x]M Optical Fiber Fan-out Kit, 12-Fiber, Monochrome

Substitute [x] in PN with: 0 1-m (40-in) legs.



CHARACTERISTICS

	269-FOK12-58B _n C	269-FOK12-58B _n M
Fiber count:	12	12
Cable diameter:	5.8 mm (0.23 in)	5.8 mm (0.23 in)
Cable structure:	single, round	
Fiber buffer diameter:	250 μm/900 μm	
Tube size:	2 mm (0.08 in)	
Tube construction:	outer tube (OD: 1.8 mm) – aramid yarn – inner tube (OD: 0.9 mm, ID: 0.5 mm)	
Materials:	polyvinylchloride (PVC), aramid yarn	
Tube color:	ANSI/TIA-598	Monochrome (white)
Mounting options:	CEA-310-E mounting flange (screws up to #12-24/M6, not included) Surfaces with mounting holes (2 × M3×0.5 screw/nut sets provided)	
Compatibility:	VC fiber 261-13110P, 261-13334P, 261-13962P	VC fiber 261-13110P, 261-13334P, 261-13962P