

CAT6A PATCH CABLE S/STP (SHIELDED)



076 SERIES

DESCRIPTION

CAT6A Shielded, 26 AWG Stranded BC, Mold-Injected Patch Cord, PVC Jacket. Ideal for high-speed 10G networks

FEATURES

- 4 Pair Stranded Bare Copper Conductors
- Shielded RJ45 Modular Plugs
- IEEE 802.3af (PoE type 1)
IEEE 802.3at (PoE type 2)
- 8P8C Gold Plated Pins 50U"
- CM Type PVC Jacket
- T568B Wiring Color Code
- UL-Listed and RoHS Compliant
- Meets or exceeds ANSI/TIA 568C.2 and 568-2.D

CONDUCTOR

Size 26 AWG
Construction 7/0.16 ± 0.002 mm
Material Bare Copper

INSULATION

Material Foam-Skin PE
Diameter 0.041 in. (1.04 mm ± 0.02)

JACKET

Material 75A PVC UL94-V2
Outer Diameter 0.2 in. (5.2 mm ± 0.1)

SHIELD

Construction 0.120 ± 0.008 mm / 5*16=80# AL-MG

CONNECTORS

RJ45 8P/8C
Contacts/Pins Gold Plated

ELECTRICAL TEST

Impedance 100 ± 15ohms
Insulation voltage rating: DC 2.5KV
Insulation resistance: DC 300V


AVAILABLE COLORS

Yellow, Black, Red, Blue, White, Green, Gray



VERTICAL CABLE

Weights:	0.5 FT - 0.025 LB	7 FT - 0.18 LB
	1 FT - 0.05 LB	10 FT - 0.25 LB
	3 FT - 0.1 LB	14 FT - 0.35 LB
	5 FT - 0.15 LB	25 FT - 0.5 LB

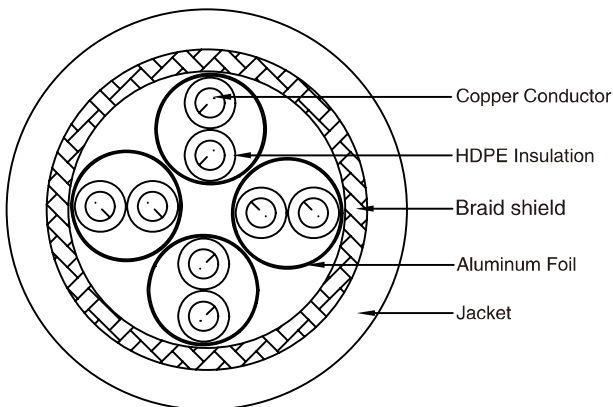

076-1001/05BK	076-1035/3WH	076-1058/10GY
076-1002/05BL	076-1036/3YL	076-1061/10RD
076-1003/05GR	076-1037/5BK	076-1062/10WH
076-1004/05GY	076-1038/5BL	076-1063/10YL
076-1008/05WH	076-1039/5GR	076-1064/14BK
076-1010/1BK	076-1040/5GY	076-1065/14BL
076-1011/1BL	076-1043/5RD	076-1066/14GR
076-1012/1GR	076-1044/5WH	076-1067/14GY
076-1013/1GY	076-1045/5YL	076-1070/14RD
076-1016/1RD	076-1046/7BK	076-1071/14WH
076-1017/1WH	076-1047/7BL	076-1072/14YL
076-1018/1YL	076-1048/7GR	076-1073/25BK
076-1028/3BK	076-1049/7GY	076-1074/25BL
076-1029/3BL	076-1052/7RD	076-1075/25GR
076-1030/3GR	076-1053/7WH	076-1076/25GY
076-1031/3GY	076-1054/7YL	076-1079/25RD
076-1034/3RD	076-1055/10BK	076-1080/25WH
	076-1056/10BL	076-1081/25YL
	076-1057/10GR	

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York
713.322.7242 Texas



verticalcable.com

Rev. 12/2024

Subject to change without notice.