

ALARM-SECURITY CABLE

22 AWG 8 CONDUCTOR
STRANDED (SHIELDED)



DESCRIPTION

22 AWG 8 Conductor Stranded Bare Copper, CM/CL2, Shielded with an overall jacket. 1000 ft, Pull Box, Grey

APPLICATION

- Intercom Systems
- Security Systems
- Sound and Audio
- Power Limited Control Circuits
- Indoor Applications
- Door Controllers
- Key Pads
- Smoke Detectors



210-228ST/S/GY

CONSTRUCTION

Conductor count:	8
Shape:	Round
Rip cord:	Yes
PE Tape	Yes
Drain Wire (TC)	7/0.20
Aluminum Foil	Yes

CONDUCTORS

Material:	Stranded bare copper
Trade size:	22 AWG
Diameter:	7 Strand (7x0.24mm)
Insulation material:	Polyvinyl Chloride (PVC)
Insulation O.D.:	0.04 in. (1.10 mm)
Insulation color:	Red, Black, Green, Blue, Brown, White, Orange, Yellow

JACKET

Material:	Polyvinyl Chloride (PVC)
Thickness:	0.02 in. (0.50 mm)
O.D.:	0.20 in. (5.10 mm)
Marking:	VERTICAL 5024318 cETLus CM/CL2 22AWG 8C STRANDED SHIELDED 75C SUN RES RoHS 045912N0510202 21:21 XXXXFT

MECHANICAL


Temperature rating:	75° C
---------------------	-------

SAFETY

NFPA 70 (NEC®) rating:	CM/CL2
Voltage rating:	300 V RMS

PACKED WEIGHT

210-228ST/S/GY	33 lb
----------------	-------

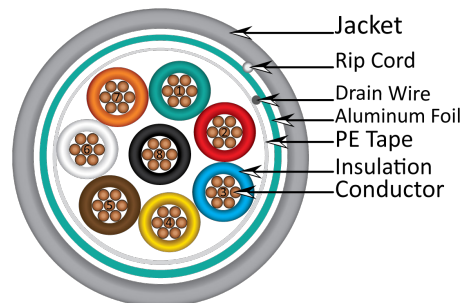

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York
713.322.7242 Texas



www.verticalcable.com

Rev. 12/2024

Subject to change without notice.