

CAT5E 48 PORT PATCH PANEL 19" RACK MOUNTABLE



VERTICAL CABLE


Simply Connect.

DESCRIPTION

**CAT5E 48 Port Panel, 110 Type Termination.
19" Rack Mountable, 2 RMU**

FEATURES

- High Impact Patch Panel
- Tough Black Painted Finish
- Number Labeled for Easy Identification
- T568A & T568B Wiring Color Codes
- 110 Type Termination
- ISO/IEC 11801, ANSI/TIA/EIA 568C.2

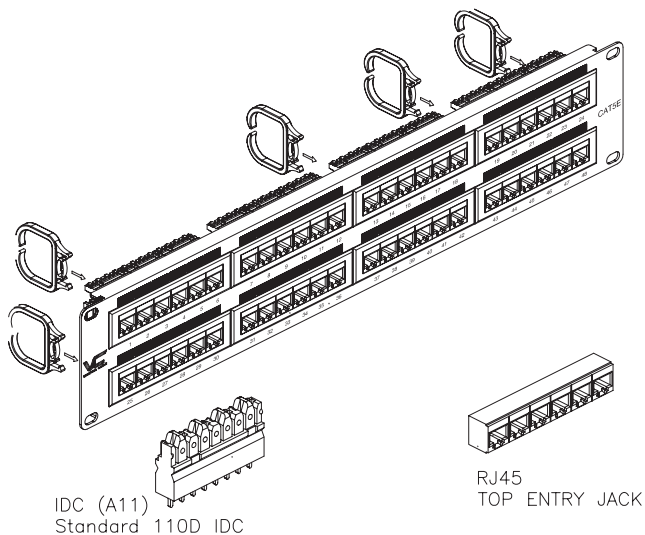

IDC (A11)
Standard 110D IDC

RJ45
TOP ENTRY JACK

Accessories: Cable Ties

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York
713.322.7242 Texas

041-373/48

PANEL HOUSING

Material SPCC
Thickness 0.06 in. (1.5 mm)
Black (RAL 9005)
IDC Suitable for 22-26 AWG
stranded and solid wire,
compatible with
110 punch down tool

RJ45 JACK


Housing ABS, UL 94V-0
Contact Bracket PC, UL 94V-2, Transparent

RJ45 CONTACT

Material Phosphor Bronze w/ Nickel Plated
Contact Finish 50µ Gold Plated (Plug contact area)

PRINTED CIRCUIT BOARD

Material FR4, UL 94V-0
Operating Temp. -10° to 60° C
(ISO/IEC 11801,
ANSI/TIA/EIA 568 B.2)
Insertion force 20N max (IEC 60603-7-4)
Retention force 7.7 kg between Jack and Plug
Life (mating cycles) 750 cycles (ISO/IEC 11801,
IEC 60603-7-4)
Jack
WEIGHT 2.6 lb (1.18 kg.)

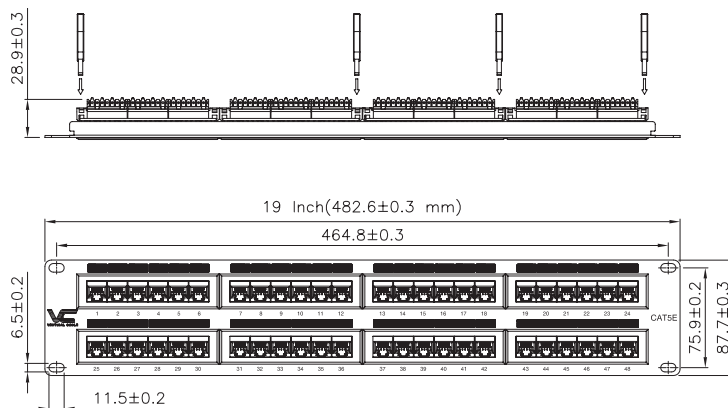

verticalcable.com

Rev. 03/2025

Subject to change without notice.